


# SL5174

## ASSEMBLY & INSTALLATION GUIDE

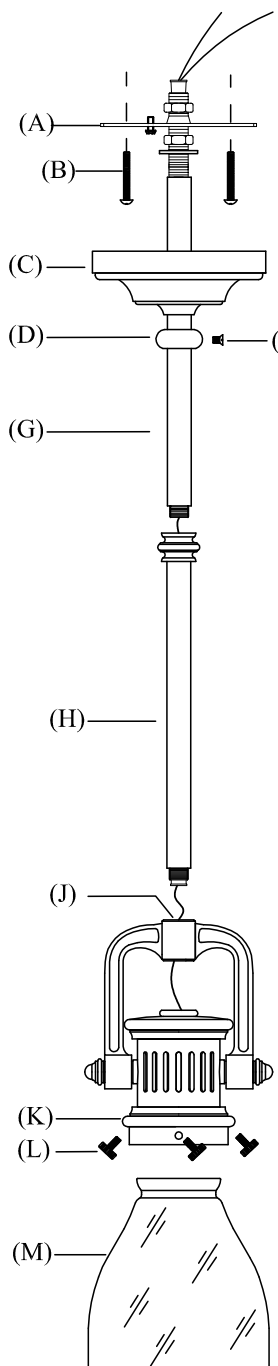

**WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.**

**WARNING \*\*\* SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

1. Discard the white plastic bushing inside threaded holes before assembling. The threaded holes are at top of (J) and pole (H).
2. Thread pole (H) into top opening of (J) and hand tighten until snug.
3. Thread pole (G) into top opening of pole (H) and hand tighten until snug.
4. Loosen set screw (E) and slide the canopy ring (D) and canopy (C) onto the pole.
5. Attach the mounting strap (A) to ceiling outlet box by aligning the mounting holes and secure with mounting screws (B) provided
6. Attach the ground wire (silver or brass in color) from the fixture to the ground junction box wire (usually green or copper wire). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed. It is imperative that the outlet box in your home be properly grounded.
7. Connect the neutral wire from the fixture (ridges molded wire) to the neutral wire from the junction box (usually white). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed.
8. Connect the hot wire from the fixture (smooth wire) to the hot wire (usually black) from the junction box. Fasten each a plastic wire connector and wrap the connection with electrical tape. Be sure that no wire strands are exposed. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
9. Thread top nipple of pole (G) into the center hole of mounting strap (A).
10. Using pliers, thread one hex nut against the mounting strap (A), another hex nut and flat washer onto the bottom end of the nipple.
11. Slip the canopy (C) and canopy ring (D) upward over the ceiling outlet box and secure with set screw (E).
12. Loosen the thumbscrews (L), place glass shade (M) into glass holder (K) and secure by tightening thumbscrews (L). **DO NOT OVER TIGHTEN, OTHERWISE IT WILL CAUSE GLASS SHADE TO BE BROKEN.**
13. Insert light bulb into the socket.