


ASSEMBLY INSTRUCTIONS

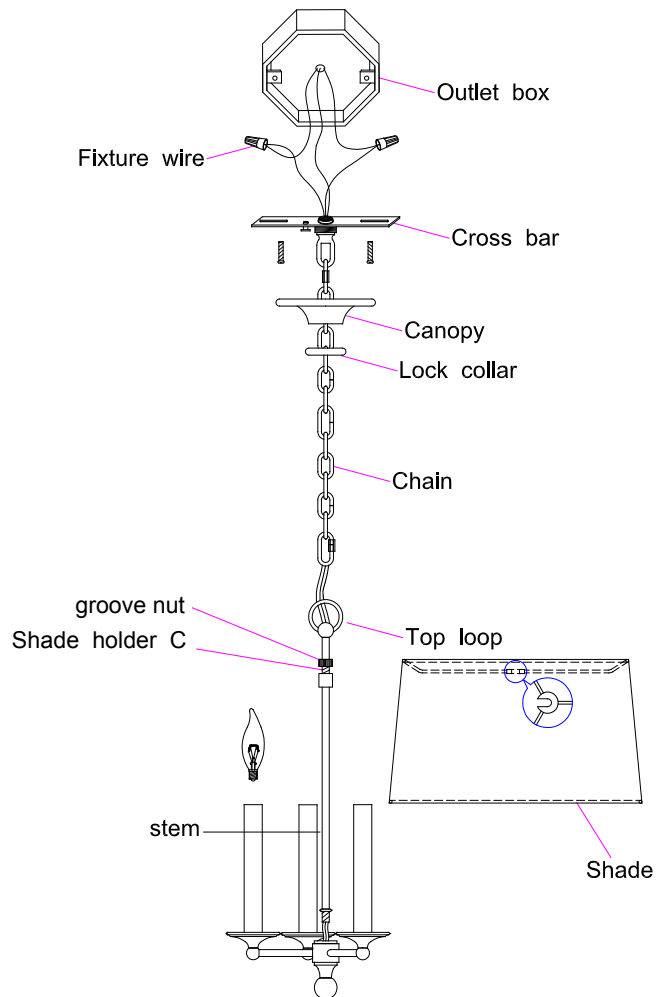

Classic Candle Hanging Light

Item # SL5818

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.


ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

1. Carefully slip stem A over fixture.
2. Make sure shade holder C on the top of cluster E.
3. Loosen the lock collar to release the canopy. Carefully slip the lock collar and canopy down over the chain to rest on the fixture body. Do not scratch the finish
4. Using the dimensions of the fixture as a guide, shorten the chain provided using a pair of chain pliers. Take into consideration that you will use the chain end link to mount the chandelier once you have cut the chain.
5. Unscrew the collar on the chain end link. Attach the chain end link to the ceiling loop.
6. Attach the chain (now desired length) to the chain end link. Close the threaded collar to secure the chain.
7. Unscrew the threaded collar on the other chain end link. Attach the chain end link to the lower end of the chain.
8. Carefully raise the fixture to the outlet box and attach the cross bar to the outlet box using the appropriate screws. Be very careful not to pinch the wires between the outlet box and cross bar.
9. Install the cross bar to the outlet box in your ceiling using the appropriate screws. Be certain your outlet box is secure and that nothing is loose.
10. Rotate the fixture now to the position desired. Make certain that you do not unscrew the fixture from the cross bar.
11. Once you are certain the fixture is in the proper position, tighten the lock nuts against the collar and cross bar very tightly so that the fixture now cannot be rotated.



VISUAL COMFORT & Co. Est. 1987

ASSEMBLY INSTRUCTIONS

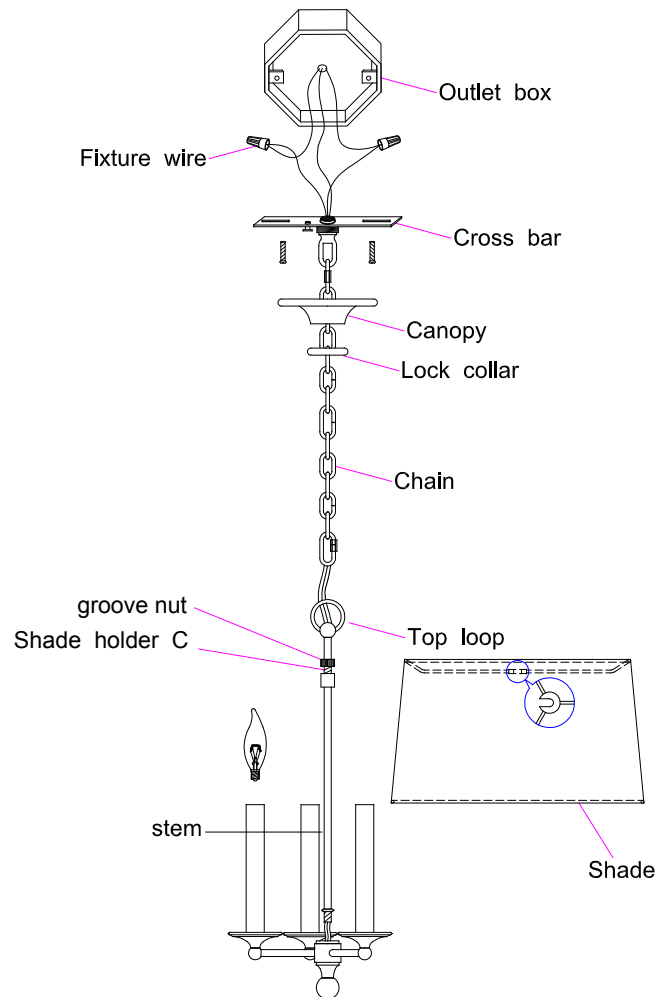

Classic Candle Hanging Light

Item # SL5818

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

12. Connect the Neutral (ribbed edge, no markings, or white) fixture wire with the Neutral (usually white) wire from your outlet box using the appropriate wire connector and wrap with electrical tape.
13. Connect the Hot (smooth edge, markings, or black) fixture wire with the Hot (usually black) wire from your outlet box using the appropriate wire connector and wrap with electrical tape.
14. Connect the Ground (bare) fixture wire with the ground (usually bare) wire from your outlet box.
****IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED****
15. Tuck these wire connections neatly into the ceiling junction box.
16. Raise the lock collar and thread onto ceiling loop protruding through canopy