




## ASSEMBLY INSTRUCTIONS

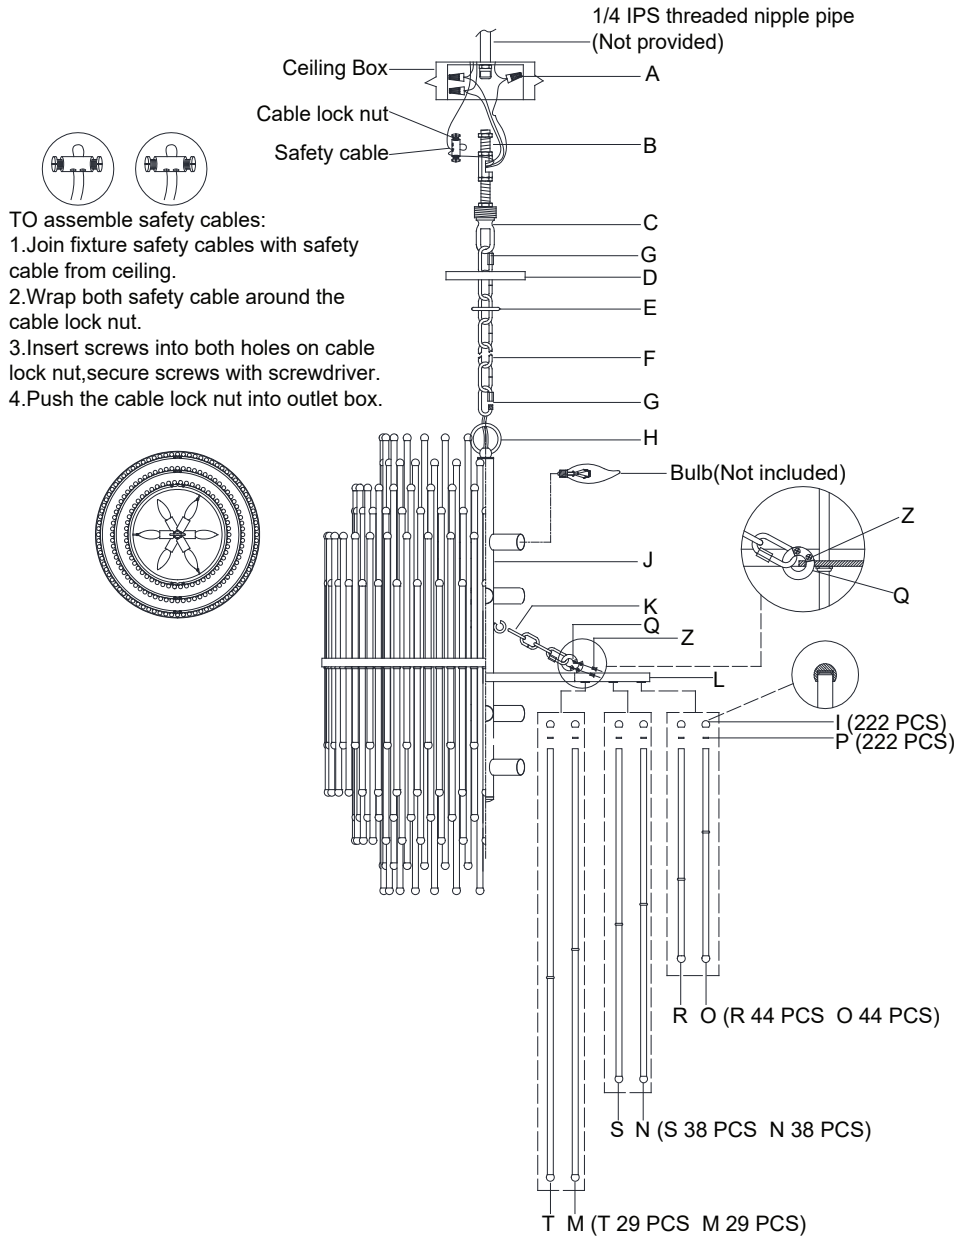

## Mia Medium Barrel Pendant

Item # SR 5114

**WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.**

**WARNING\*\*\*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

**NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.**

- Connect the fixture ground wire to the ground wire in the junction box using the wire nut (A).

IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.

- Connect the fixture ribbed wire (no markings) to the neutral wire in the junction box using the wire nut (A).

- Connect the fixture smooth wire (with markings) to the hot wire in the junction box using the wire nut (A).

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.

- Carefully tuck the wire connections into the junction box.

- Install the canopy (D) to the collar loop (C), and secure with the collar ring (E).

- Insert bulbs (not included) into the sockets.


### GLASS ROD ASSEMBLY

-Recommended use of one damp and one dry cloth for the following assembly.

-All glass rods are inserted from the bottom.

- Lightly dampen top of glass rod (M) with damp cloth before inserting to inner circle hole. Fully insert rod until the glass ring meets rubber grommet from fixture. Clean with dry cloth.
- Repeat this process to complete inner circle by alternating glass rods (M & T).
- With the inner circle complete, insert glass rods (N & S) to middle ring following the damp/dry process for each rod.
- Last, insert glass rods (O & R) to the outer circle following the damp/dry process for each rod.

## ASSEMBLY INSTRUCTIONS

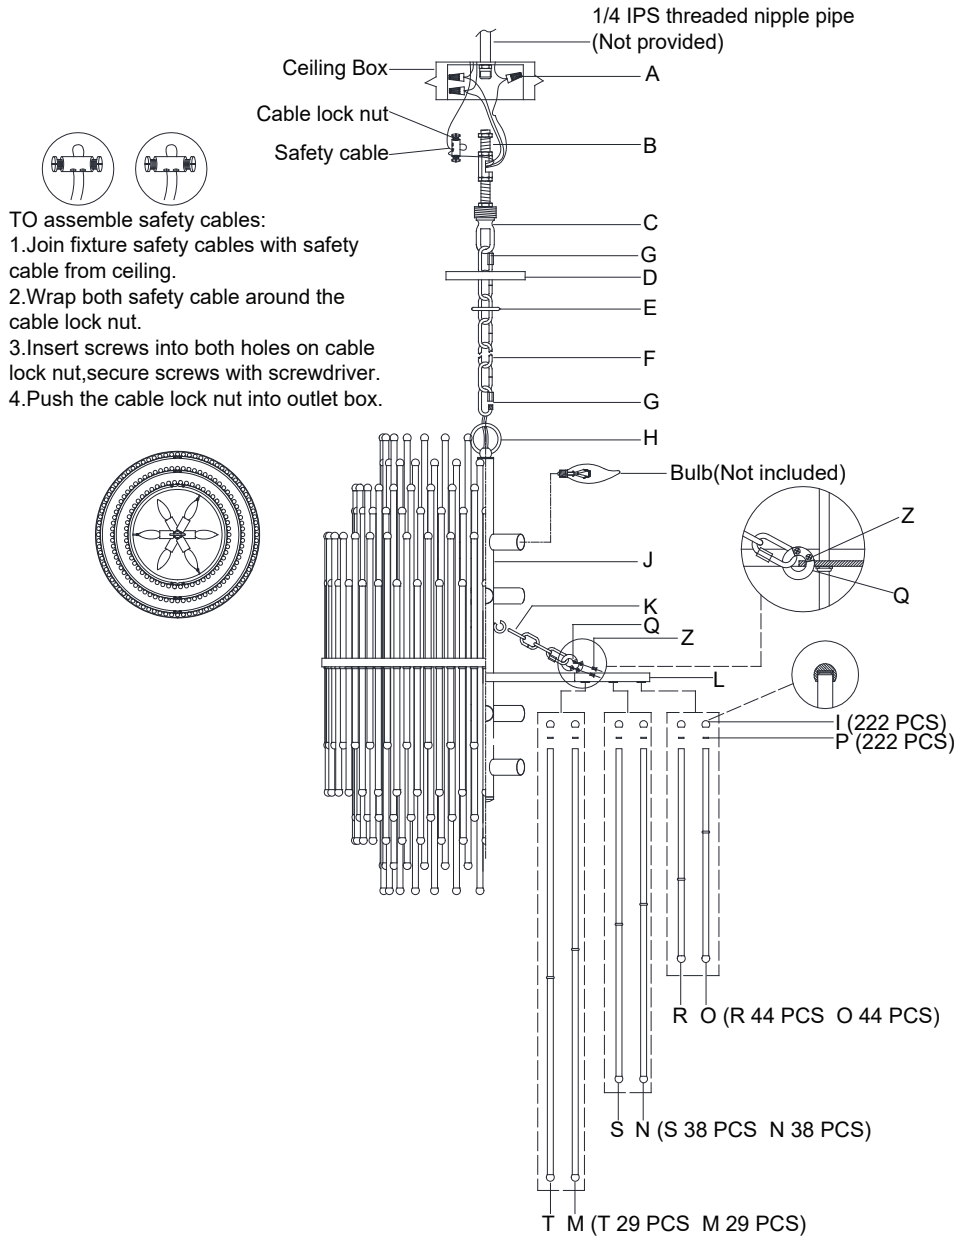

## Mia Medium Barrel Pendant

Item # SR 5114

**WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.**

**WARNING\*\*\*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

**NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.**

25. Once all glass rods are installed. Attach the metal caps to the glass rods and secure with the small washers (I).
26. Installation is complete, turn on power at fuse or circuit breaker.

\*\*\*Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.