

ASSEMBLY INSTRUCTIONS

Eden Large Flush Mount


Item # TOB4162

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

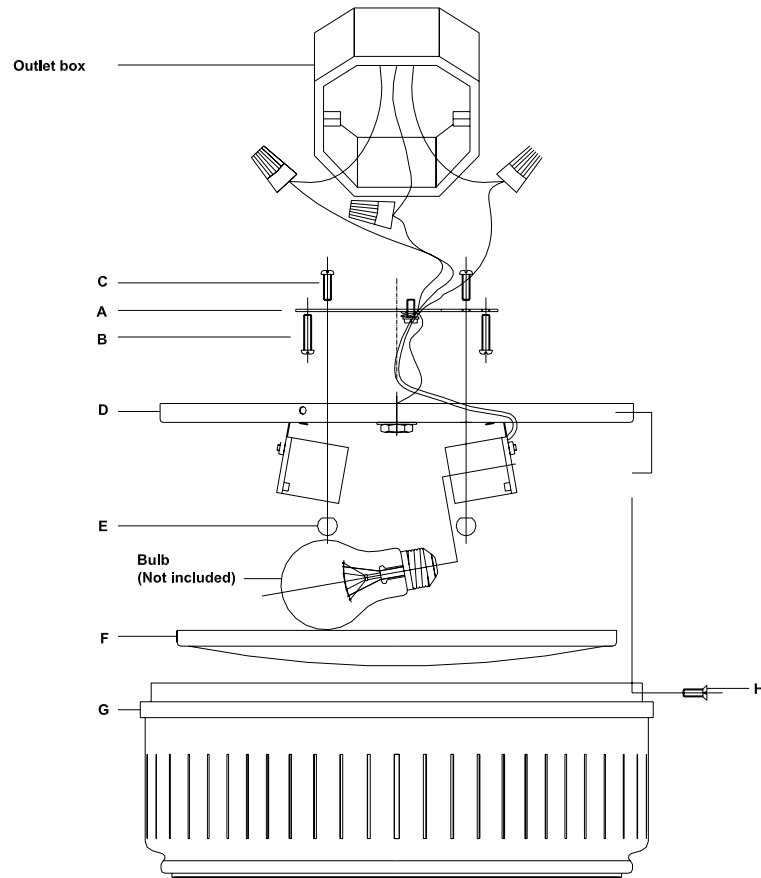

TO AVOID WATER ENTERING THE FIXTURE BASE FROM THE SIDE OF THE FIXTURE, THIS MUST BE MOUNTED ABOVE 1.2M (4 FT) FROM THE GROUND.

1. Carefully remove all parts from the box.
2. Remove mounting plate (A) from the fixture base (D) by unscrewing cap nut (E). Gently pull the wires from the ceiling outlet and allow the wires to hang.
3. Affix mounting plate (A) onto ceiling outlet box and secure with mounting screws (B).
4. Connect the hot wire from the fixture to the hot wire from the ceiling outlet box (usually BLACK). Fasten them together with a plastic wire connector provided and wrap the connection with the electrical tape.
5. Repeat this procedure for the neutral wires from the light fixture to the wire from ceiling outlet box (usually WHITE).
6. Connect ground wire from the light fixture (bare copper) to ground wire from outlet box (usually green or copper in color).
7. Attach fixture base (D) to affix mounting plate (A), letting screws (C) on mounting plate (A) pass through the hole on fixture base (D) and secure with cap nut (E).
8. Insert the bulbs, Maximum 60 Wattage Type A into the sockets.
9. Carefully insert the glass shade (F) into glass holder (G), use the clips inside the glass holder (G) to hold the glass tightly.
10. Attach glass holder (G) with glass shade (F) to fixture base (D), aligning the holes on fixture base (D) with the holes on glass holder (G) and secure with base screws (H).



VISUAL COMFORT & Co. Est. 1987

ASSEMBLY INSTRUCTIONS

Eden Large Flush Mount


Item # TOB4162

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

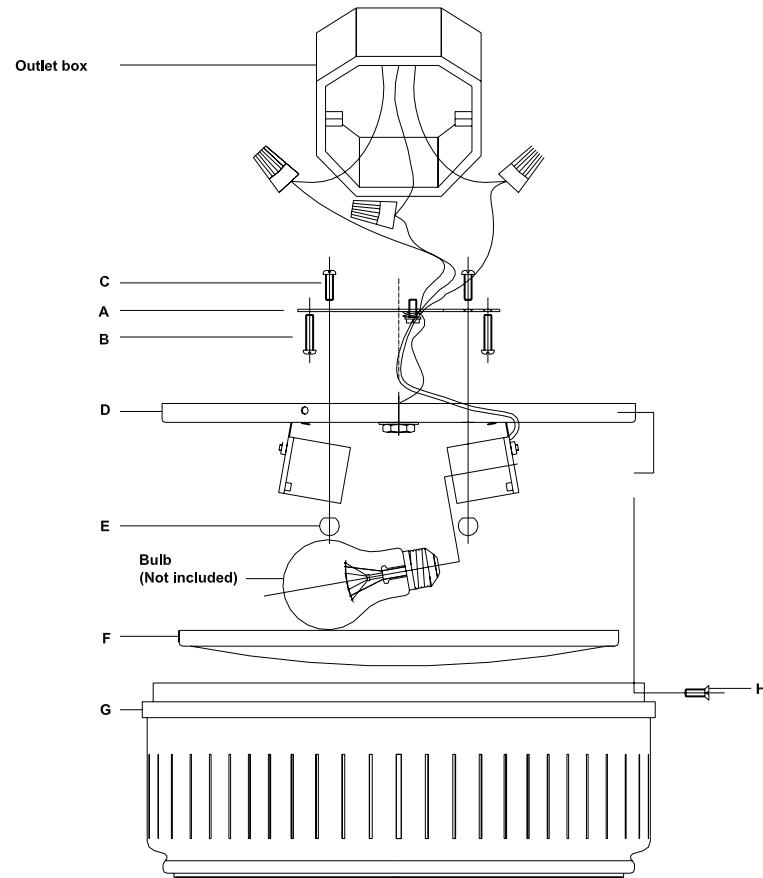

TO CHANGE LIGHT BULB:

Hold glass holder (G) with glass shade (F), then loosen glass screws (H) Insert light bulbs into sockets (not included). Replace glass holder with glass shade back and tighten with base screws (H).

*** Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.