






We address the need for a complete line of decorative lighting for all types of dwellings based on LED technology. WAC Lighting is a second-generation family-owned and operated lighting company with a reputation for quality spanning over 30 years. dweLED represents a progressive offering of decorative luminaires designed to integrate within spaces ranging from multi-family, residential and hospitality to commercial and healthcare.


dweLED collections are complete with transitional styles and modern designs, offered with 2700K, 3000K, and 3500K white light LEDs. Key features including ADA compliance, Universal Dimming (ELV, 0-10), Universal Voltage, and IP rated Wet Location certifications are amongst the options found within these pages. If your needs require something special, we welcome you to consult with us and take advantage of the custom capabilities of a true manufacturing.

With over 100 engineers on staff across 4 factories in the US and China, we put creative and forward-thinking minds behind solving your most challenging lighting needs with new technologies. All designs are then thoroughly tested in our internationally recognized NVLAP, UL, and ETL certified testing laboratories for safety, durability and robust long term performance beyond required standards.

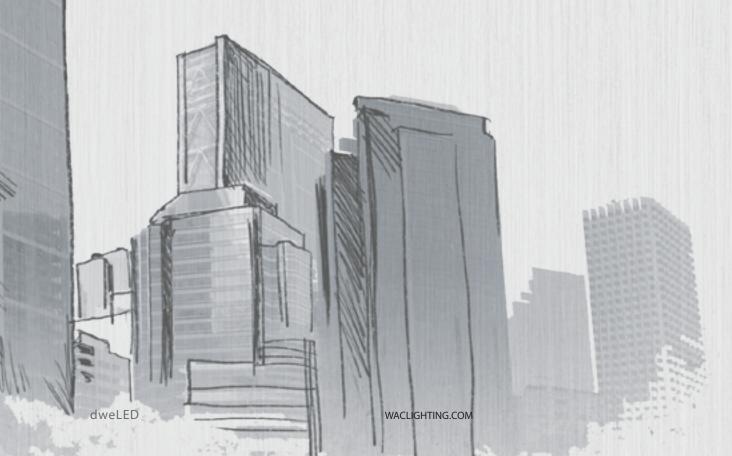

dweLED by WAC Lighting

LED Pendants + Chandeliers · · · · · · 4 - 43
LED Ceiling Mounts · · · · · · · 44 - 63
LED Sconces + Bath 64 - 113
LED Sconces + Swing Arms ·········· 114 - 145
LED Outdoor · · · · · · 146 - 177

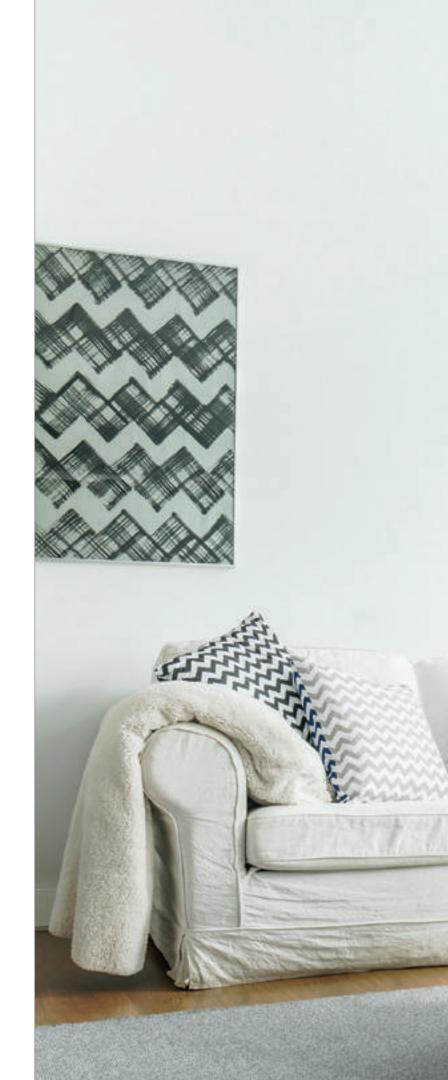








LED Pendants + Chandeliers

Generations of design trends are more forgiving of clean proportions than ornate decorations, but good lighting design is always a welcomed constant.

This is the guiding principle behind our dweLED offering of LED Pendants and Chandeliers. Stunning additions to commercial offices or kitchen islands, dweLED pendants have been specified into hundreds of designs. Custom engineered modules with perfectly spaced LED arrays ensure even illumination for an immaculate impression. Universal Dimming (ELV or 0-10V) and Universal Voltage (120V-220V-277V) are standard features in many of these technology-stacked designs to accommodate both residential and commercial installations.

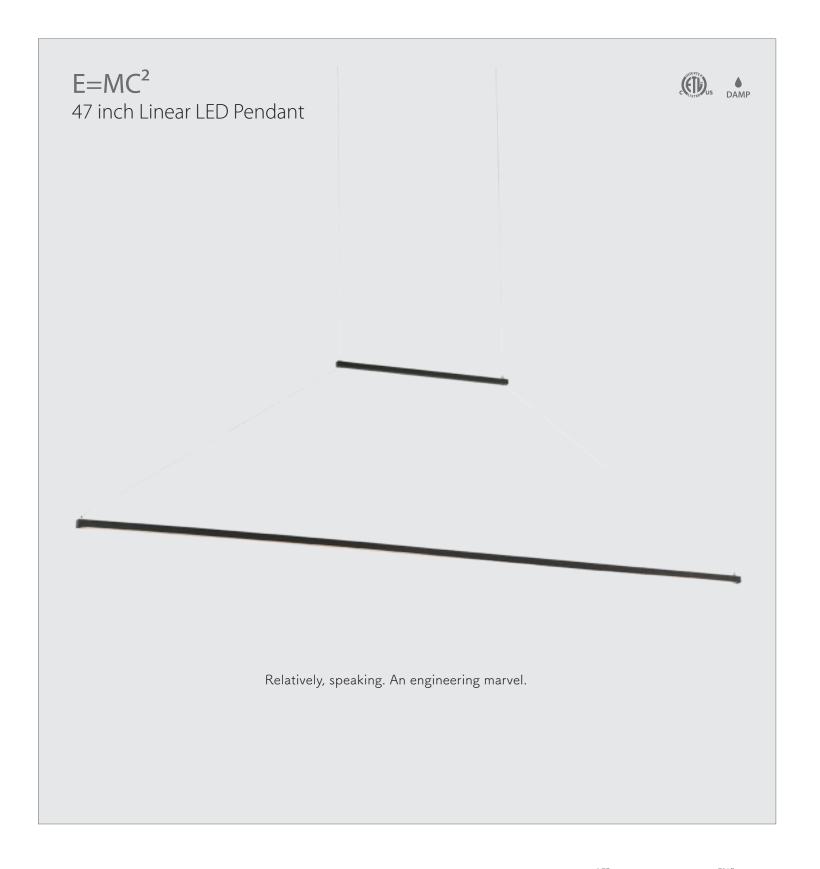

 Color Temp:
 3000K

 CRI:
 90

 Dimming:
 100% - 10% ELV

 Rated Life:
 36,000 hours

 Input:
 120 - 277V

 \bullet Impossibly tiny at just a half inch tall by a half inch wide


• Adjustable leveler provides offers custom positioning


 $\bullet \ Solid \ aluminum \ construction$

• Driver located in a standard 4" junction box

• Cable suspension carrying low voltage may be field shortened


• Universal driver (120V-220V-277V)



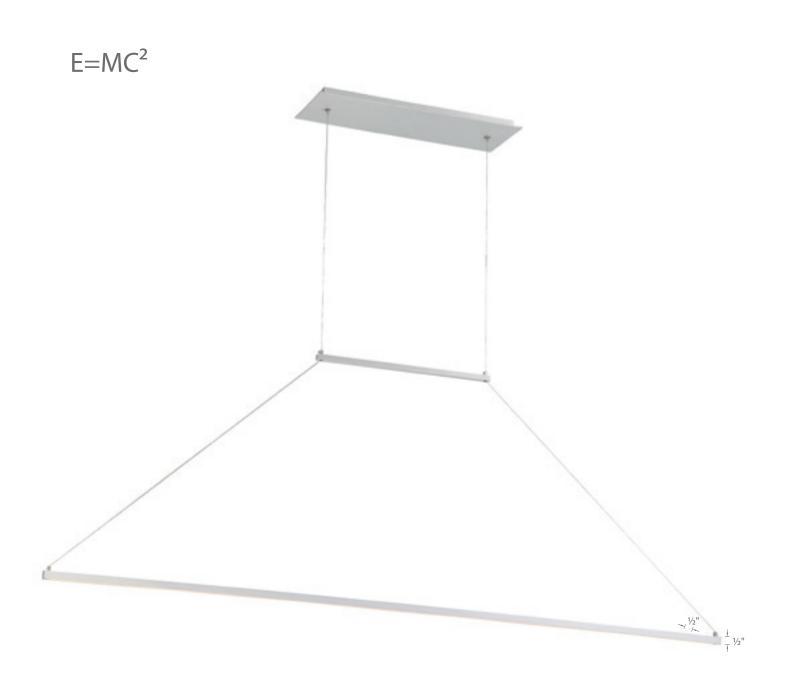

	Watt	LED Lumens	Delivered Lumens	Finish
PD-45747	30W	1770	1190	AL Brushed Aluminum BK Brushed Black

Example: PD-45747-AL

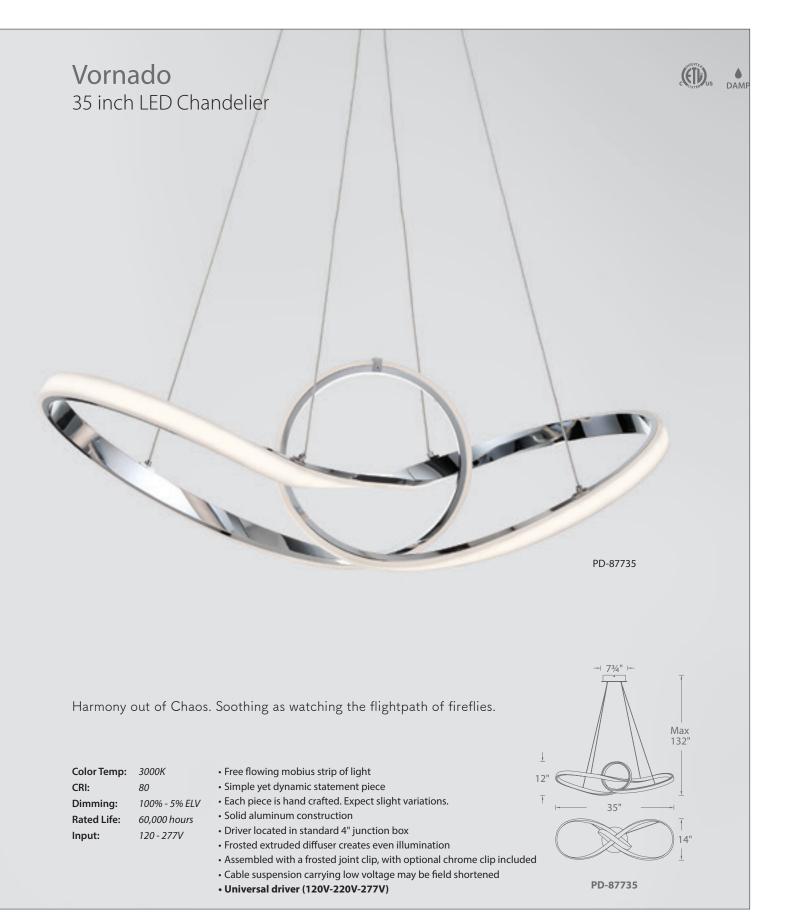

		Watt	Delivered Lumens	Finish
PD-87735	35"	52W	3550	CH Chrome

Example: PD-87735-CH





Harmony out of Chaos. Soothing as watching the flightpath of fireflies.




120 - 277V Input:

- Free flowing mobius strip of light
- Simple yet dynamic statement piece
- Each piece is hand crafted. Expect slight variations.
- Solid aluminum construction
- Driver located in standard 4" junction box
- Frosted extruded diffuser creates even illumination
- · Assembled with a frosted joint clip, with optional chrome clip included
- Cable suspension carrying low voltage may be field shortened
- PD-87720 is Title 24 compliant
- Universal driver (120V-220V-277V)











PD-87723 * As pictured on page 9

11

		Watt	Delivered Lumens	Finish
PD-87720	20"	30.5W	2075	CH Chrome
PD-87723	23"	52W	3110	Cn Chrome

Example: PD-87720-CH



		Watt	LED Lumens	Delivered Lumens	Finis	sh
PD-33718	18"	22.5W	1495	940		
PD-33732	32"	88W	6340	4435	AL	Brushed Aluminum
PD-33743	43"	128W	11115	7300		

Example: PD-33732-AL







Wishful lighting.


Luminous linear luminaire with beautiful brushed metal finishes.

Color Temp: *3000K* **CRI:** *90*

Dimming: 100% - 10% ELV **Rated Life:** 54,000 hours

Input: 120V (277V special order)

- Ultra thin pendant for the discerning minimalist
- Solid aluminum construction
- Frosted diffuser provides even illumination
- Cable suspension carrying low voltage may be field shortened
- Transformer located inside the canopy
- Brushed and anodized metal finishes




15

	Watt	LED Lumens	Delivered Lumens	Fini	sh	
PD-22754	56W	3095	2535		Brushed Aluminum Brushed Black	


Example: PD-22754-AL

For 277V, add an "F" before the finish: **PD-22754F-AL**

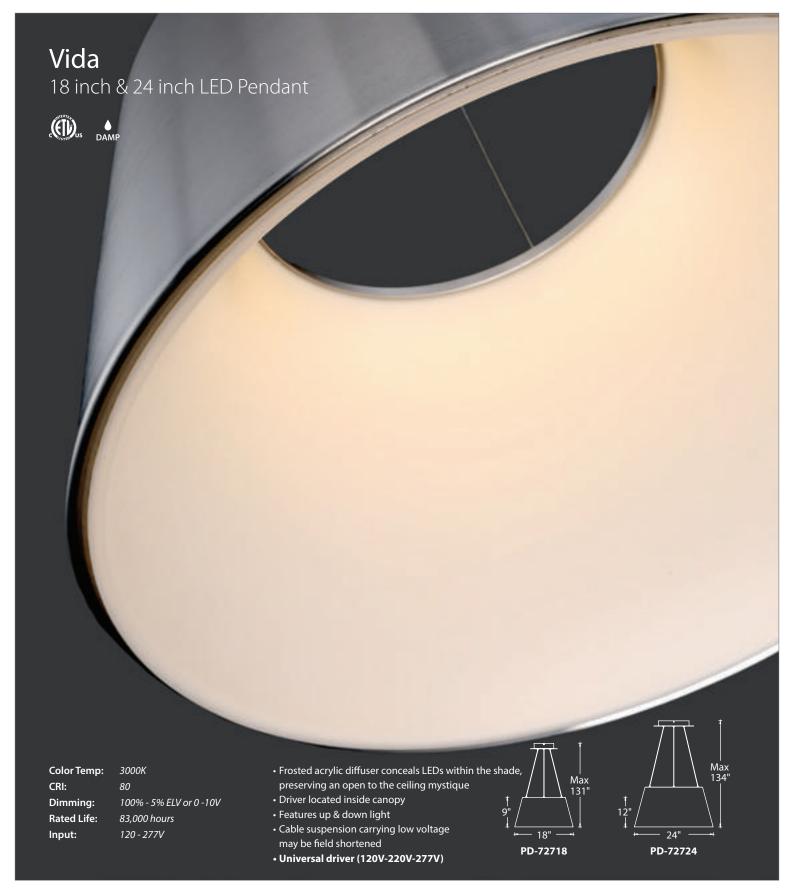


		Watt	LED Lumens	Delivered Lumens	Finish
PD-72718	18"	33.5W	2450	1755	AL Brushed Aluminum
PD-72724	24"	43W	3235	2385	AL Brushea Alammam

Example: PD-72718-AL

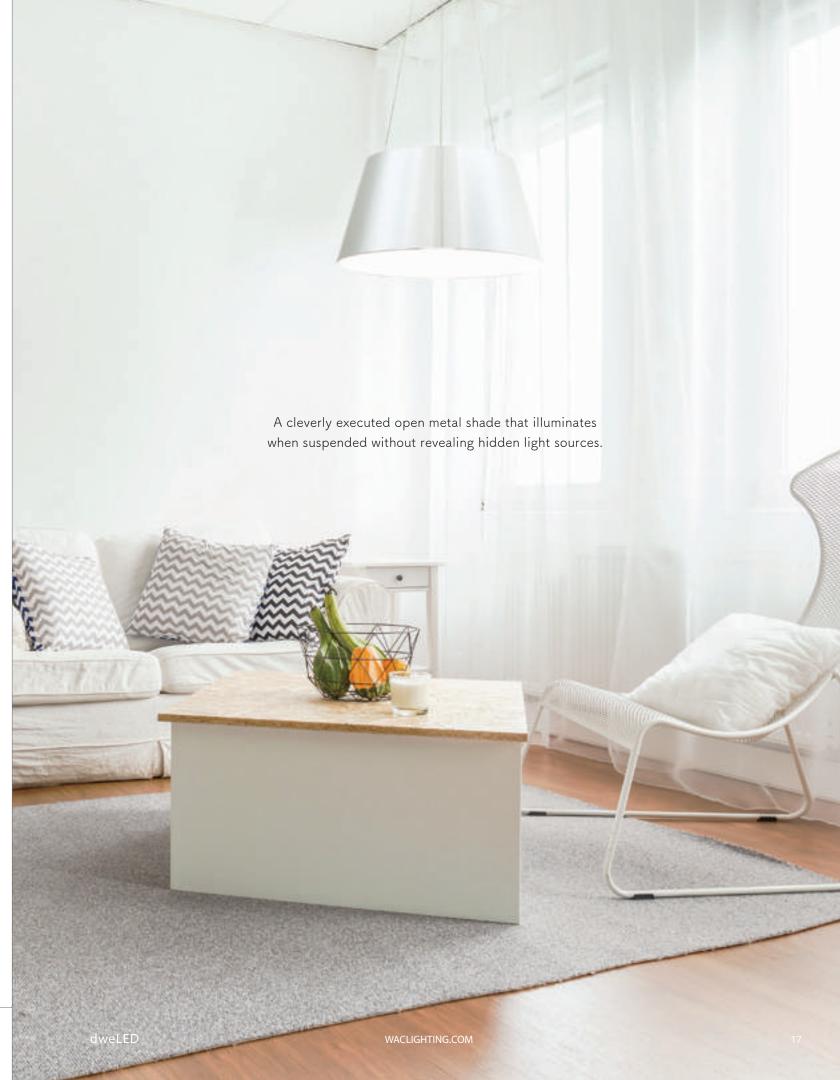




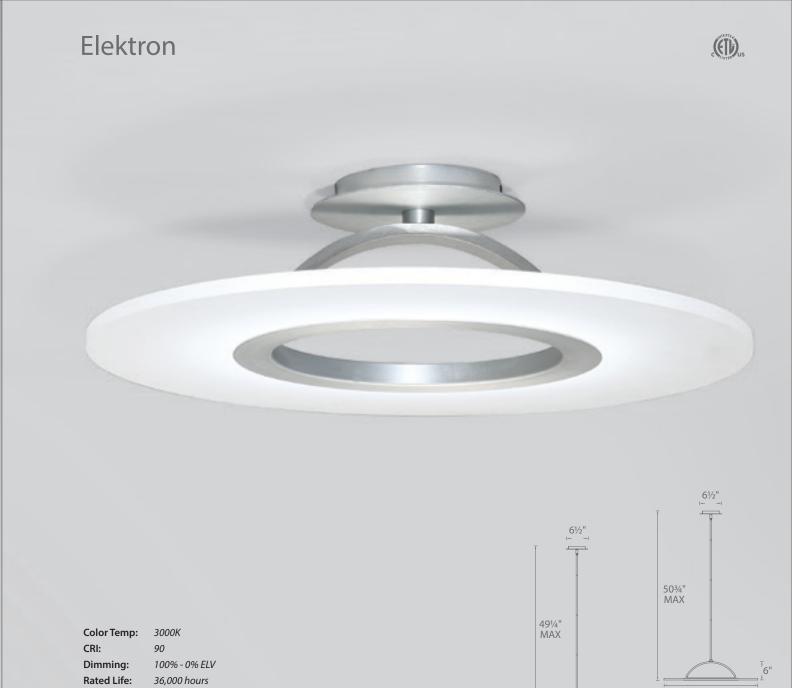

Input: 120 - 277V


- Uniquely versatile fixture capable of transforming before your eyes
- Side lit acrylic diffuser with discretely hidden LEDs.
- Downrods can be removed to mount as a ceiling fixture or wall sconce
- Driver located in standard 4" junction box
- 10' of wire included to extend pendant up to a total of 120" max, three 12" and one 6" downrods included (additional downrods available)
- Universal driver (120V-220V-277V)



19

		Watt	Delivered Lumens	Finish	า
FM-21720	20"	20W	1315	AL	Brushed Aluminum - •
FM-21728	28"	30W	1720	AL	brashea Alaminam

Example: FM-21720-AL

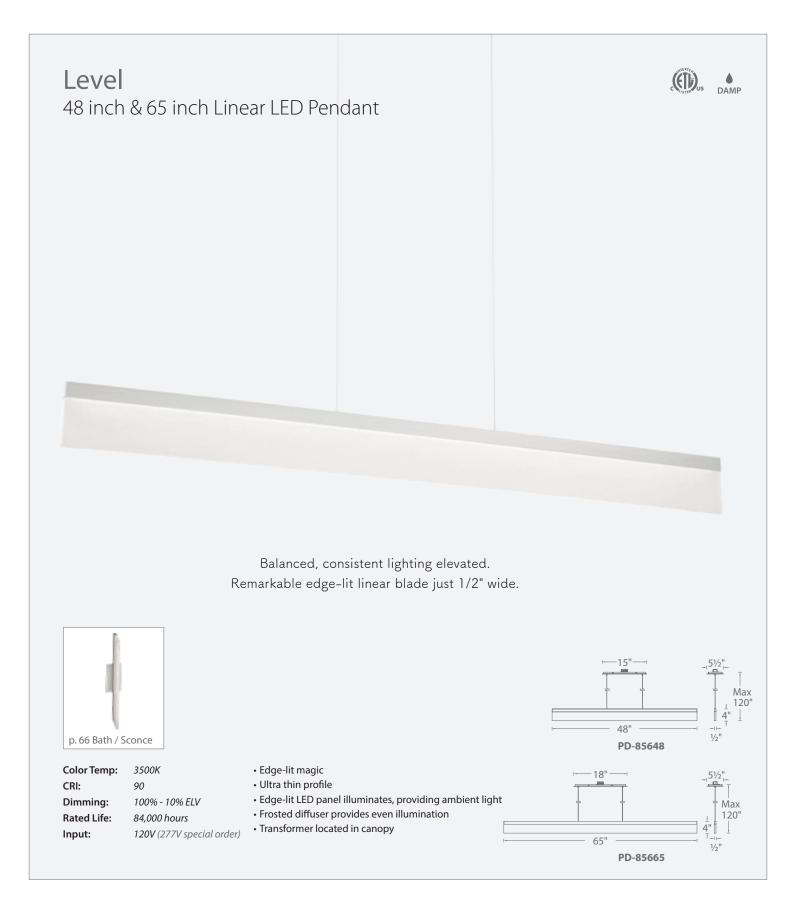


		Watt	LED Lumens	Delivered Lumens	Finish
PD-85648	48"	35W	1620	1565	AL Brushed Aluminum
PD-85665	65"	45W	2100	2015	AL Brusheu Alummum

dweLED

Example: PD-85648-AL

20

For 277V, add an "F" before the finish: **PD-85665F-AL**

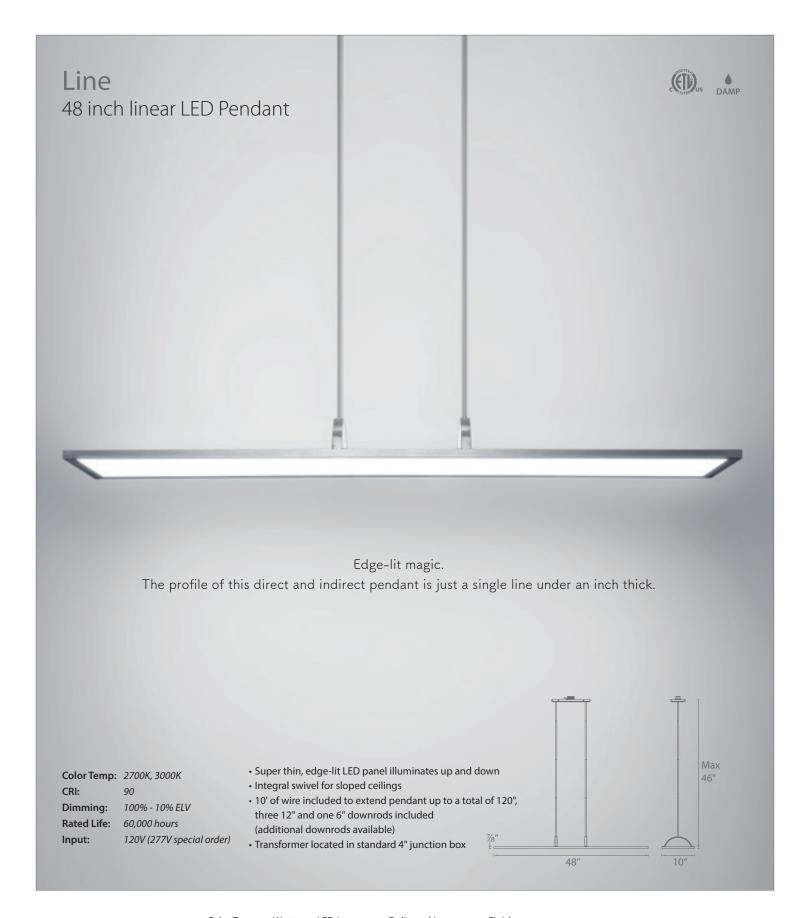

	Color Temp	Watt	LED Lumens	Delivered Lumens	Fini	sh	
PD-51148-27 PD-51148-30	2700K 3000K	48W 48W	4017 4435	2770 3055	AL	Brushed Aluminum	

Example: **PD-51148-27-AL**

For 277V, add an "F" before the color temperature: PD-51148F-27-AL







Spectacular halo of direct and indirect light from an impossible form

Color Temp:

3000K CRI:

Dimming: Rated Life:

100% - 0% ELV 44,000 hours

Input:

120 - 277V

• Edge-lit magic

• Ultra thin 1/2" thick edge-lit disc


• Edge-lit panel illuminates up & down

• Driver located inside canopy

• Universal driver (120V-220V-277V)







Watt Delivered Lumens Finish

PD-31727	27"	60W	2615	тт	Titanium	
PD-31735	35"	90W	4740		mamam	

Example: PD-31735-TT







Swivels to adjust light in any direction as inspired by vanity mirrors.

	Watt	Delivered Lumens	Finish
PD-60723	28W	1895	TT Titanium

Example: PD-60723-TT



		Watt	LED Lumens	Delivered Lumens	Finish	
PD-26611	11"	15W	1187	858	SN Satin Nickel	
PD-26616	16"	20W	1769	1363	SIN SUUTINICKET	

Example: PD-26616-SN

26

For 2700K add "-27"; 3500K add "-35" before the finish: **PD-26616-27-SN**



	Watt	LED Lumens	Delivered Lumens	Finish	
PD-83720	16W	1000	810	PN Polished Nickel	43 16

WACLIGHTING.COM

Example: PD-83720-PN



	Watt	LED Lumens	Delivered Lumens	Finish		
PD-64713	15.5W	960	810	BN/OP BN/CH	Brushed Nickel / Opal Brushed Nickel / Chrome	

WACLIGHTING.COM

Example: PD-64713-BN/CH



Flair 14 inch LED Pendant





TITLE 24 CALIFORNIA



Color Temp: *2700K* **CRI:** *90*

Dimming: 100% - 10% ELV **Rated Life:** 60,000 hours

Input: 120V (277V special order)


- \bullet Spun metal housing with mouth blown etched triplex glass diffuser
- Integral swivel for sloped ceilings
- 10' of wire included to extend pendant up to a total of 120", three 12" and one 6" downrods included (additional downrods available)
- Driver located in standard 4" junction box

	Watt	LED Lumens	Delivered Lumens	Finish
PD-52214	14W	906	435	BN Brushed Nickel

WACLIGHTING.COM

Example: PD-52214-BN

For 277V, add an "F" before the finish: **PD-52214F-BN**

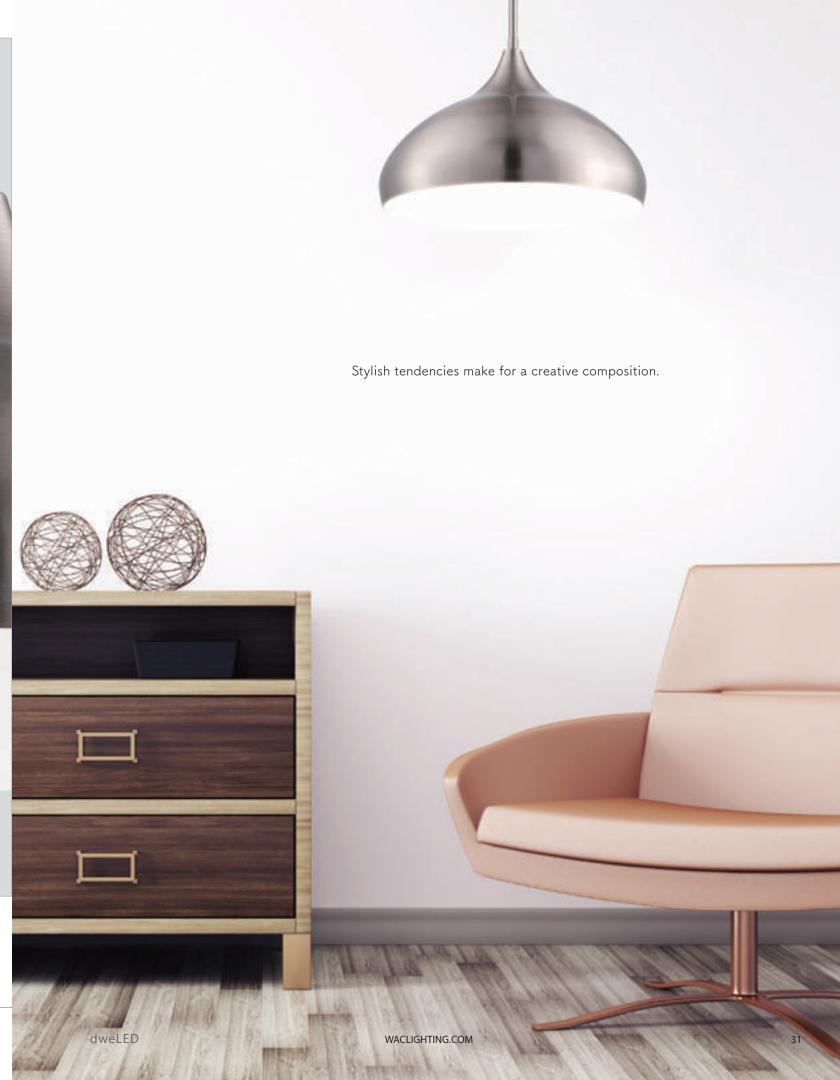




	Watt	LED Lumens	Delivered Lumens	Finish
PD-51712	12W	882	420	BN Brushed Nickel BR Brushed Brass

Example: PD-51712-BN

For 277V, add an "F" before the finish: $\mbox{PD-51712F-BN}$

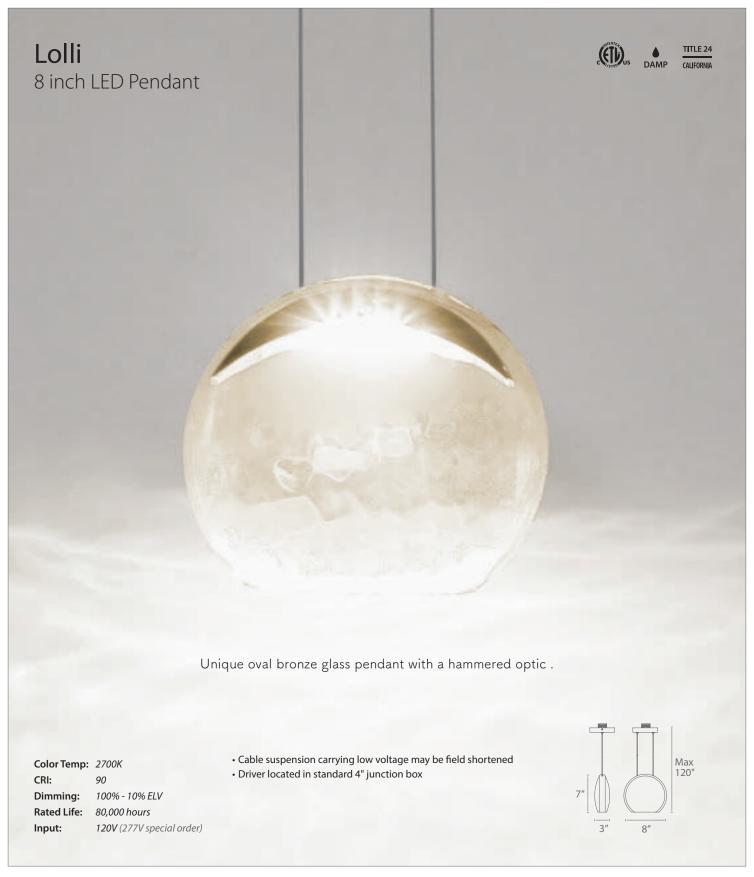

	Watt	LED Lumens	Delivered Lumens	Finish
PD-52008	6.5W	284	165	CH Chrome

Example: PD-52008-CH

For 277V, add an "F" before the finish: **PD-52008F-CH**

33



	Watt	LED Lumens	Delivered Lumens	Finish
PD-51915	14W	906	735	BN Brushed Nickel

Example: PD-51915-BN



	Watt	LED Lumens	Delivered Lumens	Finis	h	
PD-51814	14W	906	845	BN	Brushed Nickel	

Example: PD-51814-BN




		Watt	LED Lumens	Delivered Lumens	Finish
PD-36710	10"	9.5W	820	725	BN Brushed Nickel
PD-36714	14"	18W	1620	1520	DIA DIASTICATIVICACI

Example: PD-36710-BN

For 277V, add an "F" before the finish: **PD-36710F-BN**



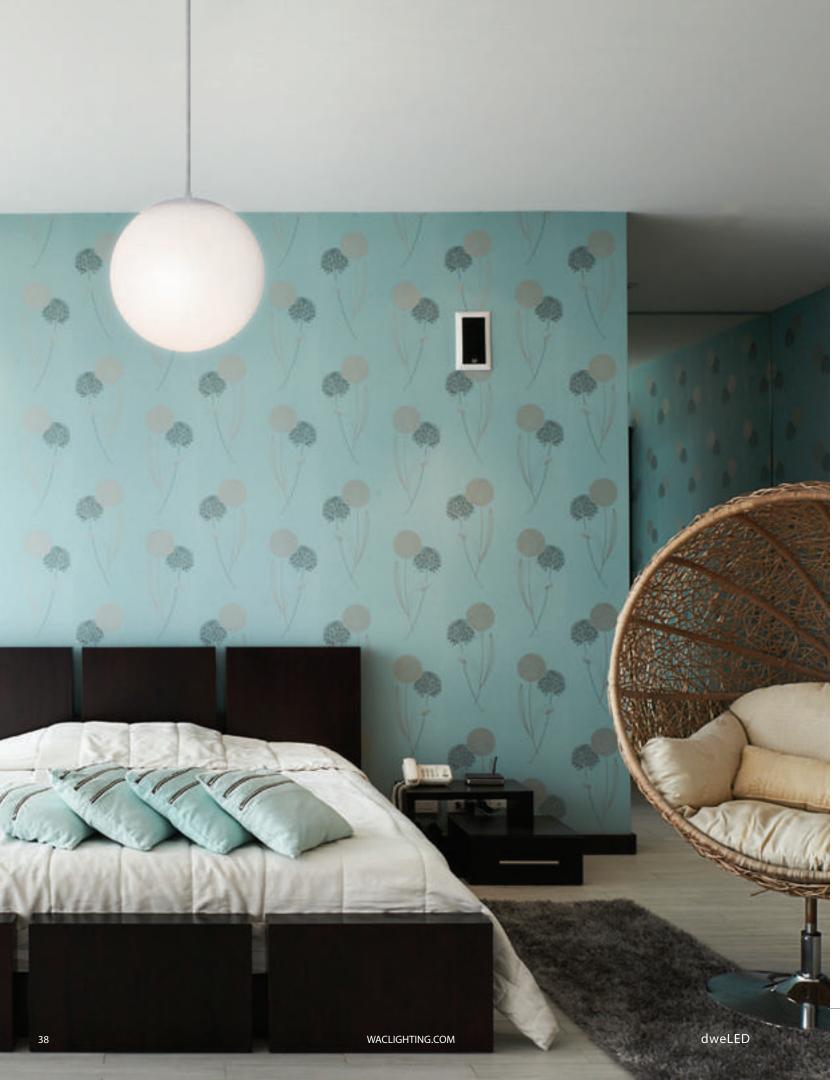



		Watt	LED Lumens	Delivered Lumens	Finish
PD-52310	10"	14W	906	685	BN Brushed Nickel
PD-52313	13"	14W	906	715	WT White

Example: PD-52310-BN

For 2700K add "-27"; 3500K add "-35" before the finish: **PD-52310-27-BN**









Urban chic sophistication. Luminous fabric shade pendant.

Color Temp: 2700K CRI:

100% - 10% ELV Dimming: Rated Life: 50,000 hours Input:


40

120V

• Urban elegance & LED illumination softened with a fabric shade

• 10' of wire included to extend pendant up to a total of 120", three 12" and one 6" downrods included (additional downrods available)

• No transformer or driver required



		Watt	LED Lumens	Delivered Lumens	Finish
PD-13714	14"	31W	2405	2205	
PD-13720	20"	36W	2405	2360	BN Brushed Nickel
PD-13726	26"	41W	3000	2825	

Example: PD-13720-BN

Manhattan





14 inch, 20 inch & 26 inch LED Close-to-Ceiling Mount







Color Temp: 2700K

CRI: 90
Dimming: 100% - 10% ELV

Rated Life: 50,000 hours Input: 120V



- Urban elegance & LED illumination softened with a fabric shade
- No transformer or driver required



FM-13114

20"

			Watt	LED Lumens	Delivered Lumens	Finish
	14"	FM-13114	31W	2405	2205	
	20"	FM-13120	36W	2405	2360	BN Brushed Nickel
	26"	FM-13126	39W	3000	2825	
Francis FM 12114 DN						

Example: FM-13114-BN





A great compass always leads you home.

Distinctive decorative complement indoors and out.

	Watt	LED Lumens	Delivered Lumens	Finish
PD-W33620	35W	3200	1890	AL Brushed Aluminum BZ Bronze

Example: **PD-W33620-BZ**

For 277V, add an "F" before the finish: **PD-W33620F-BZ**





LED Ceiling Mounts

dweLED Ceiling Mount luminaires are designed to integrate within a variety of spaces ranging from residential and multifamily to commercial and healthcare. These well-engineered luminaires are cleanly finished with no visible hardware, offering a glare-free superbly low-profile quality that is defining of good LED luminaire design. dweLED Ceiling Mount luminaires maximize application versatility with a full range of light outputs and sizes from 6" to 28" in addition to dimming and input voltage options. Expect ample and even illumination across a range of applications, from general illumination in offices to functional lighting with excellent color rendering for walk-in closets.

Planets







17 inch & 22 inch LED Ceiling Mount



Cosmically proportioned decorative ceiling-mount luminaires

Color Temp: 3500K CRI:

Dimming: 100% - 10% ELV

Rated Life: 63,000 hours Input: 120 - 277V

- Large diameter makes a great addition to large rooms or high-ceiling applications
- Low-profile fixture with maximum illumination
- Extruded aluminum trim with no visible hardware
- Driver located inside the fixture
- Mount as a ceiling fixture or wall sconce
- Silk-screened glass diffuser with a white ceramic glaze
- Universal driver (120V-220V-277V)









Elektron



20 inch & 28 inch LED Pendant & Close-to-Ceiling Mount



Travelling at the speed of light


Color Temp: *3000K* **CRI:** *90*

 Dimming:
 100% - 0% ELV

 Rated Life:
 36,000 hours

 Input:
 120 - 277V

- Uniquely versatile fixture capable of transforming from pendant to ceiling mount
- Side lit acrylic diffuser to add an even ring of light to any space
- Mount as a ceiling fixture or wall sconce
- Driver located in standard 4" junction box
- 10' of wire included, may be converted to a pendant with threaded downrods: three 12" and one 6" downrods included (additional downrods available)
- Universal driver (120V-220V-277V)



		Watt	Delivered Lumens	Finish	n
FM-21720	20"	20W	1315	AL	Brushed Aluminum - •
FM-21728	28"	30W	1720		DIADIGA / IMITIMITI

Example: FM-21720-AL

Geos



6 inch, 10 inch, 15 inch & 22 inch LED Ceiling Mount

Simple shapes with hi-tech soul.



Color Temp: 2700K, 3000K

CRI: 9

Dimming: 100% - 10% ELV

Rated Life: 70,000 hours

Input: 120V (277V special order)

• Edge-lit magic

- Super thin, edge-lit LED panel at less than an inch thick
- Great for closets and hallways
- Die-cast aluminum construction
- Wall or ceiling mount with twist-lock mechanism
- Transformer located in outlet box






			Color Temp	Watt	LED Lumens	Delivered Lumens	Finish
0	6"	FM-4606-27 FM-4606-30	2700K 3000K	8W 8W	551 608	270 300	TT Titanium
	10"	FM-4610-27 FM-4610-30	2700K 3000K	12.5W 12.5W	964 1064	545 600	WT White

Example: **FM-4610-27-WT**

50

For 277V, add an "F" before the color temperature: FM-4610F-27-WT

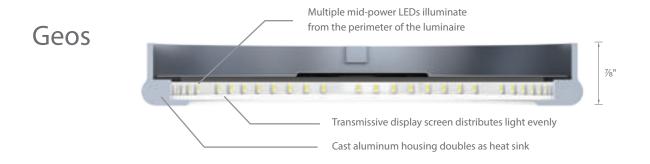



Slice







9 inch , 11 inch & 15 inch LED Ceiling Mount + Wall Mount



Clean design of simple shapes with etched water-clear solid glass for robust illumination.





Color Temp: 2700K, 3000K


CRI: 90

Dimming: 100% - 10% ELV Rated Life: 36,000 hours

Input: 120V (277V special order)

- Etched ¾" thick pressed glass diffuser with interior ceramic glaze
- Mount as a ceiling fixture or wall sconce
- No transformer or driver required
- Wet location listed for indoor applications



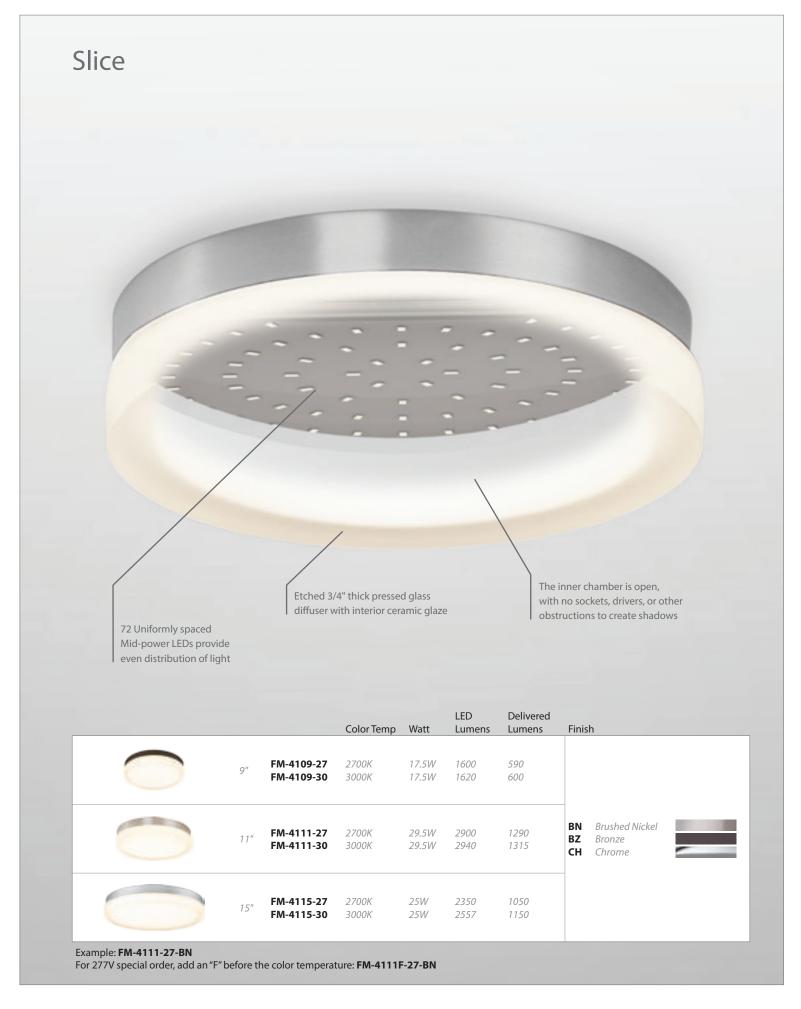

Dice







TITLE 24 CALIFORNIA

6 inch , 9 inch , 12 inch & 14×5 inch LED Ceiling Mount + Wall Mount





Color Temp: 2700K, 3000K

CRI: 90

Dimming: 100% - 10% ELV Rated Life: 36,000 hours

Input: 120V (277V special order)

- Etched ¾" thick pressed glass diffuser with interior ceramic glaze
- FM-4006, FM-4009, FM-4012 are wet location listed for indoor applications
- FM-4006, FM-4009, FM-4012 are Title 24 compliant
- Mount as a ceiling fixture or wall sconce
- No transformer or driver required







FM-4012



FM-4014

Dice



		Color Temp	Watt	LED Lumens	Delivered Lumens	Finis	sh	
6"	FM-4006-27 FM-4006-30	2700K 3000K	17.5W 17.5W	1550 1565	808 820			
9"	FM-4009-27 FM-4009-30	2700K 3000K	25W 25W	2300 2325	1240 1265	BN BZ CH	Brushed Nickel Bronze Chrome	
12"	FM-4012-27 FM-4012-30	2700K 3000K	25W 25W	1990 2200	890 985			
14" x 5"	FM-4014-27 FM-4014-30	2700K 3000K	31W 31W	1323 1356	610 640	BN	Brushed Nickel	-

Example: FM-4009-30-BN

For 277V special order, add an "F" before the color temperature: **FM-4006F-27-BN**

Meridien













Longitude of lumens. The epitome of uptown chic.



Color Temp: 3000K CRI:

Dimming: 100% - 0% ELV Rated Life: 53,000 hours 120 - 277V Input:

- Classic look with a modern upgrade
- Mount as a ceiling fixture or a wall sconce
- Driver located in standard 4" junction box
- $\bullet \ \, \text{Silk-screened glass with a white ceramic glazed center and water clear edge} \\$

LED

Delivered

• Universal driver (120V-220V-277V)



		Watt	Lumens	Lumens	Finish
14"	FM-57614	22.5W	1660	1145	BN Brushed Nickel

Example: FM-57614-BN

Vie 14 inch LED Ceiling Mount













p. 112 Bath



Color Temp: 2700K (3000K / 3500K special order)


CRI: 90

Dimming: 100% - 10% ELV **Rated Life:** 80,000 hours

Input: 120V (277V special order)

A complete collection of contemporary sconces and bath.

- Vie adds a luxurious look to modern spaces
- Etched opal triplex glass provides even illumination
- Unblemished plate finishes
- Multiple LED array eliminates socket shadows
- No transformer or driver required



57

		Watt	Lumens	Lumens	Finish
14"	FM-4313	30W	2620	1545	BN Brushed Nickel CH Chrome

Example: **FM-4313-CH**For 277V, add an "F" before the finish: **FM-4313F-CH**For 3000K add "-30"; 3500K add "-35" before the finish: **FM-4313-30-CH**

Niveous 6 inch & 9 inch LED Ceiling + Wall Mount











p. 39 Pendant

The perfect sphere.

Color Temp: 3000K (2700K / 3500K special order)

CRI: 90

Dimming: 100% - 10% ELV **Rated Life:** 45,000 hours

Input: 120V (277V special order)

• Spheres of pure light

• Mouth blown etched triplex opal glass diffuser provides even illumination

LED

Delivered

• Solid aluminum construction

• Mount as a ceiling fixture or wall sconce

• Listed for use in closets

• No transformer or driver required

6"



FM-W52306

FM-W52309


		Watt	Lumens	Lumens	Finish
6"	FM-W52306	9.5W	800	680	WT White
9"	FM-W52309	18W	1600	1428	W. William

Example: FM-W52306-WT

58

For 277V, add an "F" before the finish: **FM-W52306F-WT**

For 2700K add "-27"; 3500K add "-35" before the finish: **FM-W52306-35-WT**

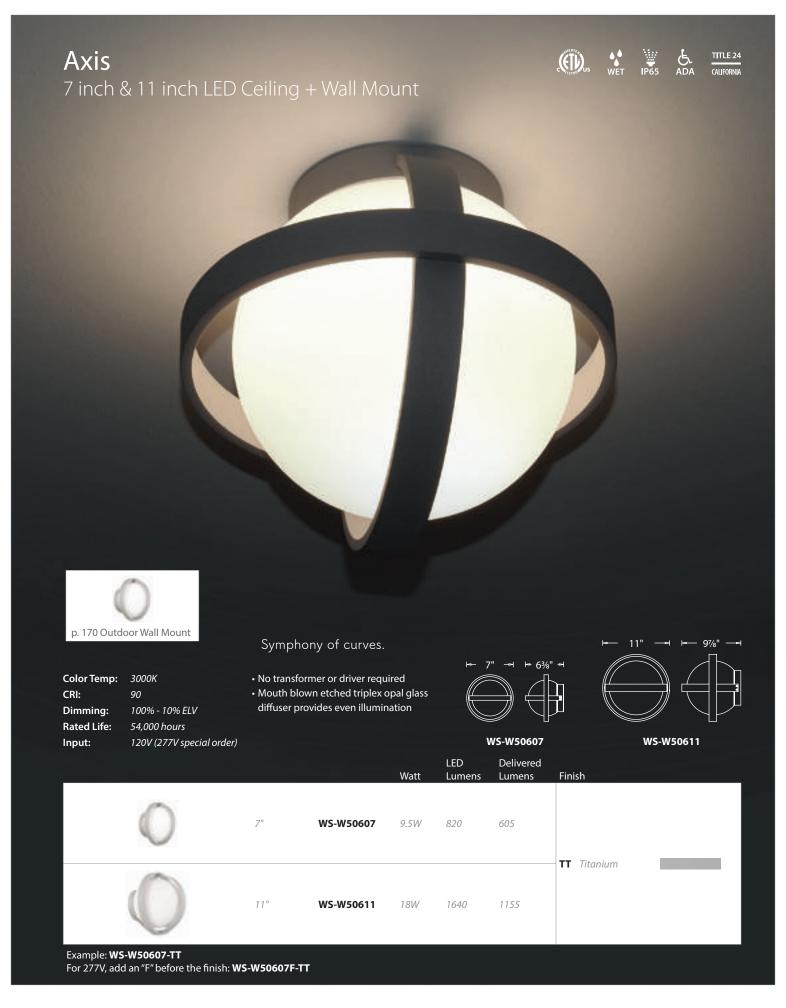

Astoria 13 inch LED Ceiling Mount













Classically elegant. A beautiful complement

Color Temp: 2700K (3000K / 3500K special order)

CRI:

Dimming: 100% - 10% ELV Rated Life: 80,000 hours

Input: 120V (277V special order) • The latest LED light engines inside a retro-style housing.

LED

Delivered

• Etched white glass diffuser

• Multiple LED array for uniform illumination

• No transformer or driver required



	watt	Lumens	Lumens	Finish	
FM-7013	30.5W	2620	1110	BB Burnished Brass BO Brushed Bronze	-

Example: FM-7013-BB

60

For 277V, add an "F" before the finish: FM-7013F-BB

For 3000K add "-30"; 3500K add "-35" before the finish: **FM-7013-30-BB**



Bristol 13 inch LED Ceiling Mount











Illuminating Conventional Wisdom

2700K (3000K / 3500K special order) Color Temp:

CRI:

100% - 10% Dimming: 80,000 hours Rated Life:

120V (277V special order) Input:


• An exquisite traditional design with a modern upgrade

• Mouth blown triplex opal glass provides even illumination

Delivered

• Multiple LED array eliminates socket shadows

• No transformer or driver required



13"

	Watt	Lumens	Lumens	Finish
FM-7113	30W	2620	990	AN Antique Nickel

Example: FM-7113-AN

62

For 277V, add an "F" before the finish: FM-7113F-AN

For 3000K add "-30"; 3500K add "-35" before the finish: FM-7113-30-AN

Compass


















p. 88 Bath

Color Temp: 3000K

100% - 10% ELV Dimming: Rated Life: 45,000 hours

Input: 120V


- Mouth blown etched triplex opal glass diffuser provides even illumination
- Solid aluminum construction
- Mount as a ceiling fixture or wall sconce
- Listed for use in closets
- No transformer or driver required



Delivered

Distinctive decorative complement indoors and out.





FM-W33616

63

		vvacc	Lamens	Lamens	1 111311
12"	FM-W33612	19W	1647	1147	AL Brushed Aluminum
16"	FM-W33616	35W	3112	1668	BZ Bronze

LED

Example: FM-W33616-BZ





LED Sconces + Bath

Focused on timeless silhouettes, scaled-up metalwork and enduring finishes, these luminaires feature a tightly engineered fit and finish to coordinate seamlessly with upscale hardware and fixtures. Baths are ideal places to demonstrate illumination performance from proprietary LED technology where color quality and brightness requirements are the greatest. dweLED sconces and bath designs are trained on clean looks with ample illumination in color temperatures best suited for the intended space. Within these pages, you will find certain styles designed for warm white 2700K light, some for neutral white 3000K light, and others for bright white 3500K light. For an optimal lighting design, we recommend specifying luminaires in 2700K, 3000K, or 3500K based on the color palette and intended use of the designed spaces.



19 inch, 25 inch & 37 inch LED Bath





Balanced, consistent lighting elevated.

p. 20 Pendant

Color Temp: *3500K* **CRI:** *90*

Dimming: 100% - 10% ELV Rated Life: 85,000 hours

Input:

120 - 277V

• Frosted diffuser provides even illumination

• Mount vertically or horizontally


• Adjustable backplate

• Conversion plate for 4" junction box included

 \bullet Driver located in standard 2" x 4" junction box

• WS-85618 is ADA compliant, low profile design

• Universal driver (120V-220V-277V)



dweLED



		Watt	LED Lumens	Delivered Lumens	Finish
WS-85618	19"	15.5W	1300	865	
WS-85624	25"	20.5W	1735	1255	AL Brushed Alumimum
WS-85636	37"	30W	2561	1800	

Example: WS-85618-AL

Reflection

23 inch, 29 inch & 39 inch LED Bath



Color Temp: *3500K* **CRI:** *90*

 Dimming:
 100% - 5% ELV

 Rated Life:
 46,000 hours

 Input:
 120 - 277V

- Edge-lit magic
- Ultra low profile design
- Mount vertically or horizontally
- Frosted acrylic diffuser provides even illumination
- WS-59639 features ELV or 0-10V dimming
- Driver located in standard 4" junction box
- Universal driver (120V-220V-277V)





Theory 25 inch & 32 inch LED Bath







 Color Temp:
 3500K

 CRI:
 90

 Dimming (120V):
 100% - 0% ELV

70

 Rated Life:
 44,000 hours

 Input:
 120 - 277V

• Solid die-cast body with a perfect nickel finish

• Mount vertically or horizontally

• Driver located inside the fixture


• Side-lit acrylic diffuser provides unique no-glare illumination

• Universal driver (120V-220V-277V)

Theory

Bold statement created from a single concept.






	Length	Watt	Delivered Lumens	Finish	
WS-42725 WS-42732		15.5W 22W	1085 1555	BN Brushed Nickel	

Example: WS-42725-BN



LED Sconces + Bath


WACLIGHTING.COM

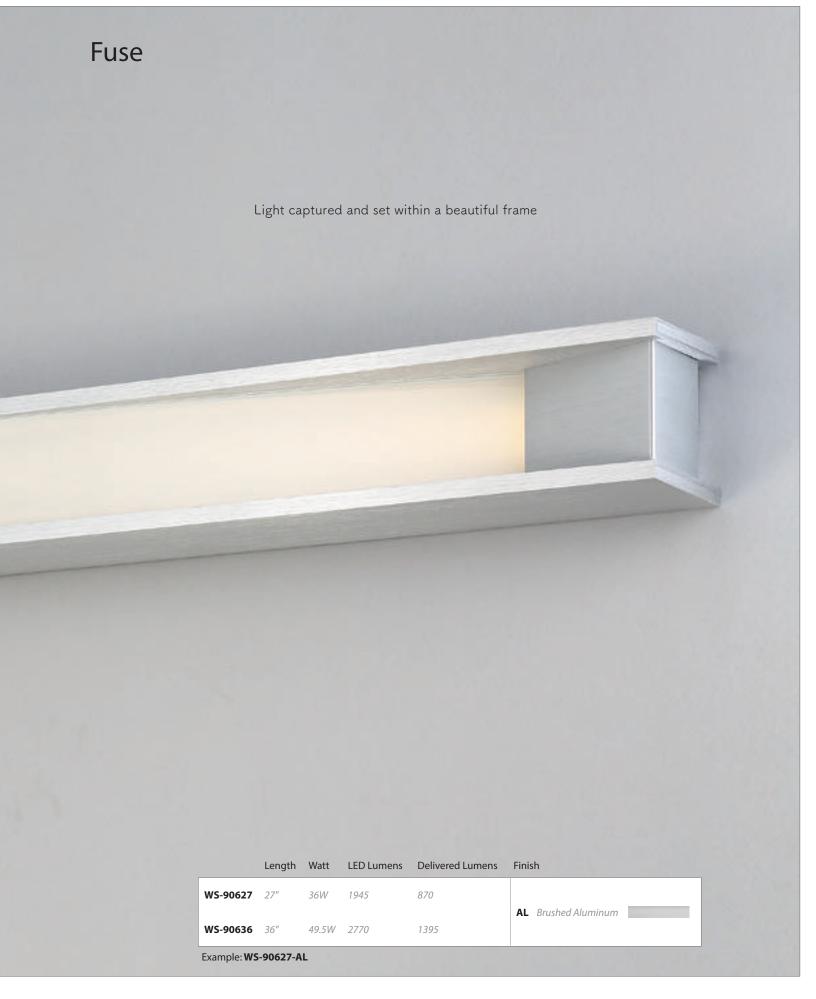

Brink





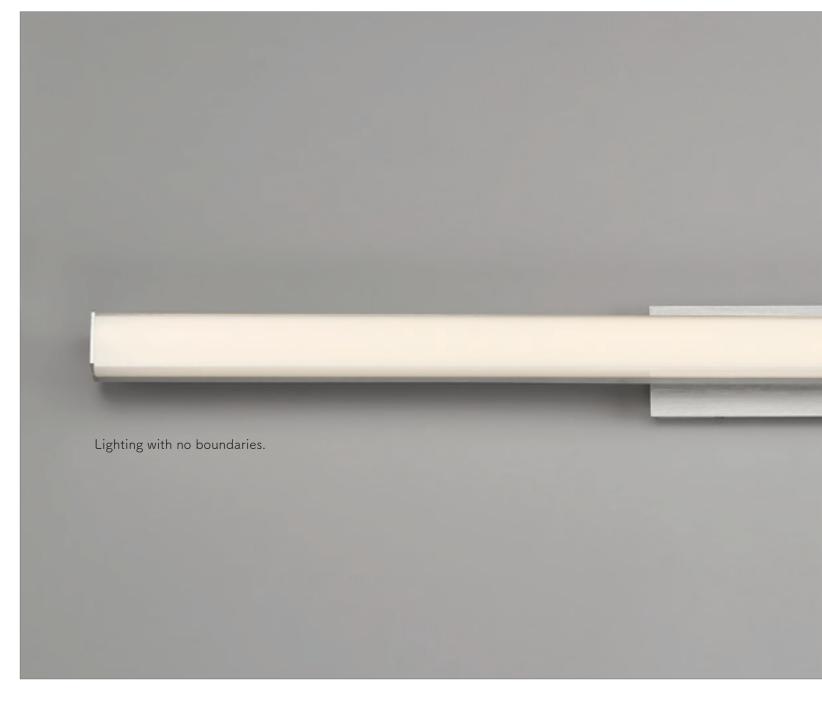

Color Temp: 2700K, 3000K, 3500K

CRI: 90


100% - 5% ELV Dimming: Rated Life: 85,000 hours 120 - 277V Input:

· Modern, sleek, clean


- Ultra low profile design
- Co-extruded clear and white acrylic provides substance, luminosity and optical efficacy
- Mount vertically or horizontally
- Driver located in standard 2" x 4" junction box
- Conversion plate for 4" junction box included

WACLIGHTING.COM

- Adjustable backplate
- Universal driver (120V-220V-277V)



Brink

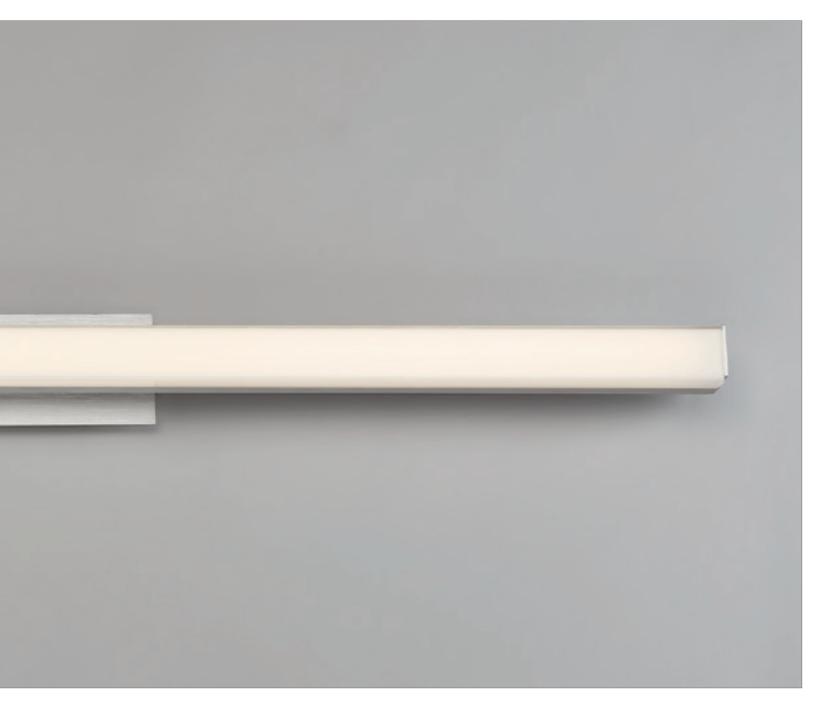

		Color Temp	Watt	LED Lumens	Delivered Lumens	Finish
	WS-77618-27	2700K	15.5W	1155	910	
18"	WS-77618-30	3000K	15.5W	1225	1015	
	WS-77618-35	3500K	15.5W	1330	1115	
	WS-77624-27	2700K	20.5W	1595	1330	
24"	WS-77624-30	3000K	20.5W	1720	1440	AL Brushed Alumimum
	WS-77624-35	3500K	20.5W	1785	1510	
	WS-77636-27	2700K	30W	2365	1985	
36"	WS-77636-30	3000K	30W	2445	2095	
	WS-77636-35	3500K	30W	2561	2180	

Example: WS-77618-30-AL





Cliffhanger





14 inch, 24 inch & 37 inch LED Bath



Cutting edge lighting on a new platform.



Color Temp: 3000K **CRI:** 90

 Dimming:
 100% - 10% ELV

 Rated Life:
 35,000 hours

 Input:
 120 - 277V



- \bullet Fixture may be rotated 180° when mounting
- Frosted acrylic diffuser provides even illumination
- Driver located in standard 4" junction box
- 45° miter edge for a sleek, clean look
- $\bullet \ \mathsf{WS}\text{-}26714, \mathsf{WS}\text{-}26724 \ \mathsf{are} \ \mathsf{CECTitle} \ \mathsf{24} \ \mathsf{compliant}$
- Universal driver (120V-220V-277V)







WS-26737



		Watt	Delivered Lumens	Finish
WS-26714	14"	7.5W	355	
WS-26724	24"	15W	775	AL Brushed Aluminum
WS-26737	37"	21.5W	1120	

Example: WS-26714-AL

Line





18 inch, 24 inch & 36 inch LED Bath



The magic of edge-lit technology.

Color Temp: *2700K, 3000K*

CRI: 90

Dimming: 100% - 10% ELV

Rated Life: 80,000 hours

Input: 120V (277V special order)

• Edge-lit magic

 \bullet Super thin $1\!\!/_{\!2}"$ edge-lit LED panel


• An original WAC Lighting engineered design

• Rotatable panel can create indirect, up light, task light and down light

• Mount vertically or horizontally with 330° adjustment

WACLIGHTING.COM


• Transformer located in standard 4" junction box







			Color	LED	Delivered		
		Watt	Temp	Lumens	Lumens	Fini	sh
WS-6718-27	18"	11.8W	2700K	609	425		
WS-6718-30	10	11.8W	3000K	667	464		
WS-6724-27	24"	16W	2700K	827	626	١	0 / / / /
WS-6724-30	24	15.8W	3000K	912	675	AL	Brushed Aluminum
WS-6736-27	36"	22.1W	2700K	1217	903		
WS-6736-30		22.3W	3000K	1333	987		

Example: **WS-6724-30-AL**For 277V, add an "F" before the color temperature: **WS-6724F-30-AL**





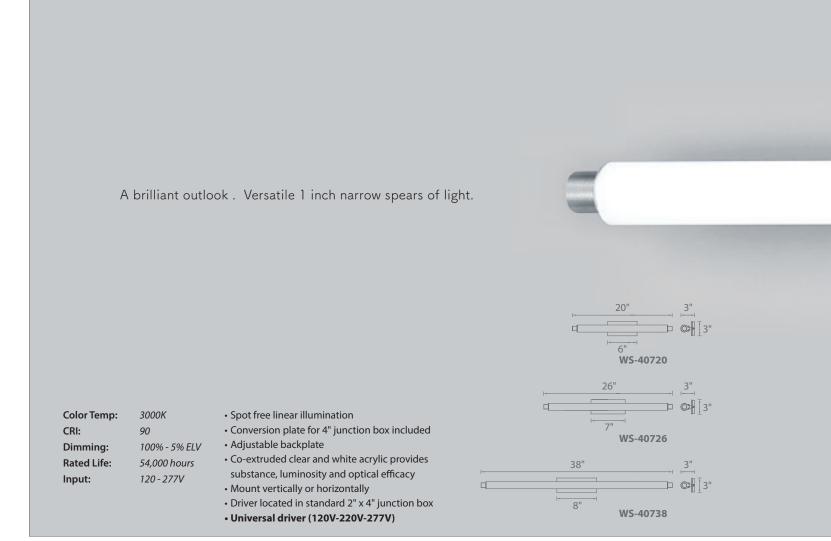

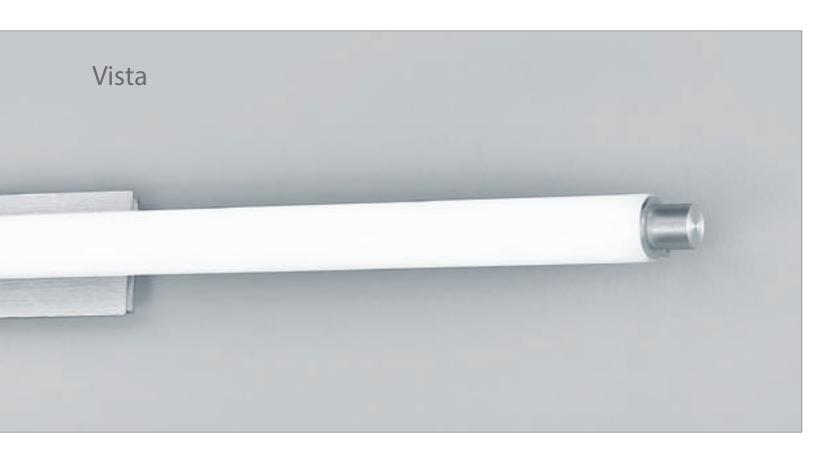



Meridien

9 inch & 20 inch LED Bath















Color Temp: 3000K CRI: 90


Dimming: 100% - 0% ELV


Rated Life: 50,000 hours
Input: 120V

• Silk-screened glass with a white ceramic glazed center and water clear edge

• Mount vertically only

• No transformer or driver required





Length	Watt	LED Lumens	Delivered Lumens	Finish


WS-57609	9"	9.5W	665	540	BN	Brushed Nickel	
WS-57620	20"	22W	1595	1220	DIN	Drustied Nickei	

Example: WS-57609-BN








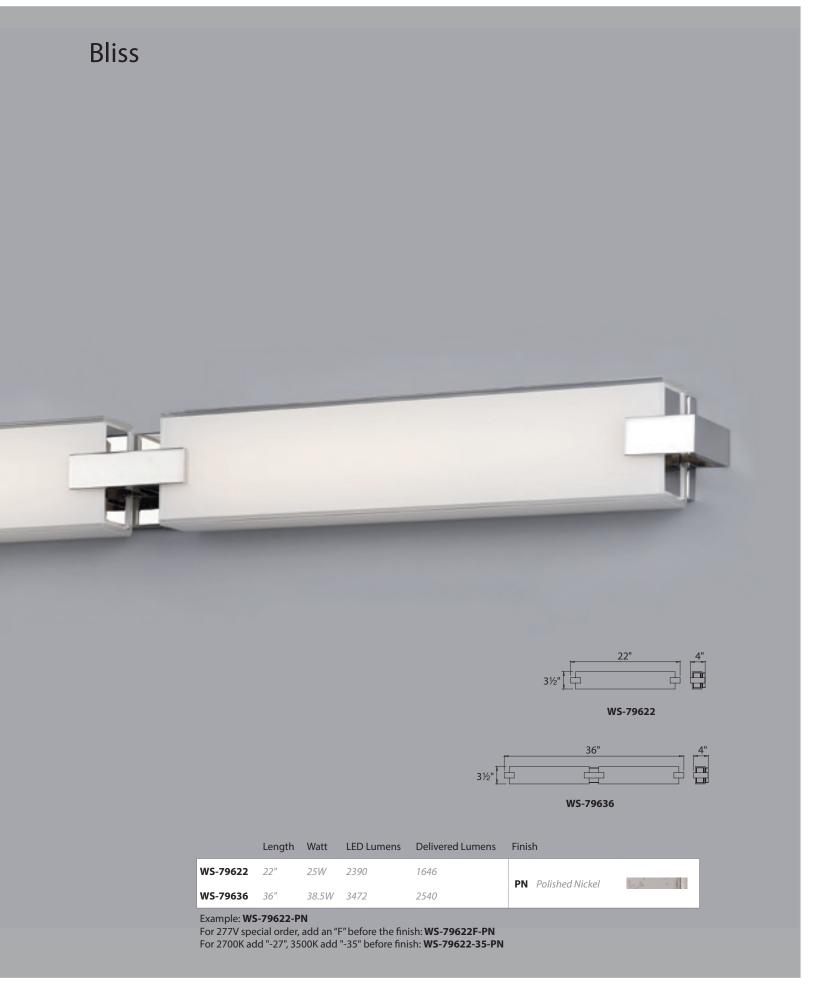

Compass













p. 42 Pendant



p. 63 Ceiling







A great compass always leads you home.

Color Temp: 3000K

CRI: 90

100% - 10% ELV Dimming: Rated Life: 45,000 hours Input: 120V

• Solid aluminum construction

• Etched triplex opal glass diffuser provides even illumination

• Mounts to standard 4" junction box

• No transformer or driver required

L		WS-21	1622 1622
I	33"		31/2"
			5"
		WS-21	633

			Watt	LED Lumens	Delivered Lumens	Finish
WS	-21611	1 Light	12W	900	495	
WS	-21622	2 Lights	24W	1840	1055	AL Brushed Aluminum
WS	-21633	3 Lights	35.5W	2665	1675	

Example: WS-21622-AL



Dice







24 inch, 35 inch & 46 inch LED Bath









Color Temp: 3000K

CRI: 90
Dimming: 100% - 10% ELV

Rated Life: 45,000 hours Input: 120V


 \bullet Clean look, simple and timeless

• Mouth blown etched triplex opal glass diffuser provides even illumination

• Mount vertically or horizontally over standard 2" x 4" junction box

• Conversion plate for 4" junction box included

 $\bullet \ \ No \ transformer \ or \ driver \ required$



	Watt	LED Lumens	Delivered Lumens	Finish
WS-20624 2 Lights	24W	1972	1247	
WS-20635 3 Lights	36W	2898	1672	BN Brushed Nickel
WS-20646 4 Lights	48W	3850	2507	

Example: WS-20624-BN



Pillar







5 inch Sconce, 12 inch & 22 inch LED Bath



Modern design with cylinders and hidden functional downlights for bath

Color Temp: *3000K* **CRI:** *90*

92

• Slim cylinders create an elegant clean addition to any space

CRI: 90

• Mouth blown etched triplex opal glass diffuser provides even illumination

Dimming: 100% - 10% ELV


Luminaire may be rotated 180° when mounting
Up & down light


 Rated Life:
 70,000 hours


 Input:
 120-277V

Driver located in standard 4" junction box
Universal driver (120V-220V-277V)

Pillar









Watt	LED Lumens	Delivered Lumens	Finish
 			1

WS-76608	1 Light	8W	468	422			
WS-76612	2 Lights	15W	949	804	SN	Satin Nickel	: -
WS-76622	3 Lights	22W	1335	1110			

Example: WS-76622-SN



Horizon

18 inch & 26 inch LED Bath









Color Temp: 3000K

CRI:

Dimming: 100% - 10% ELV

Rated Life: 44,000 hours Input: 120V

• Curved silk-screened glass with a white ceramic glazed center and water clear edge


• No transformer or driver required

	Length	Watt	LED Lumens	Delivered Lumens	Finish	
WS-58618 WS-58626		19.5W 30.5W	1805 2920	590 900	CH Chrome	


WS-58618 WS-58626

Example: WS-58618-CH

Horizon

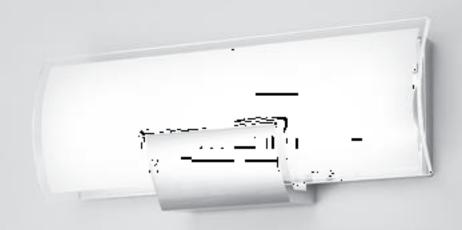

Captivating beauty just beyond reach

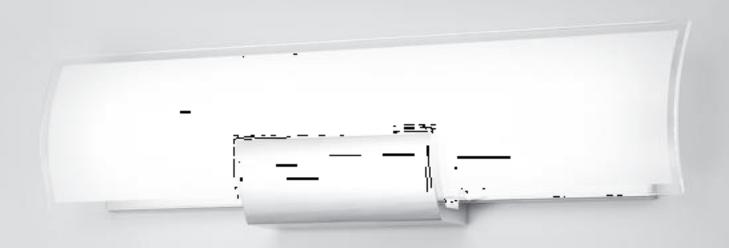

Rondelle





5 inch Sconce, 14 inch & 24 inch LED Bath



Color Temp: 3000K

CRI:

Dimming: 100% - 10% ELV

Rated Life: 60,000 hours

Input: 120V (277V special order)

	So	lid	a	lass	sha	ade
-	20	IIU	9	uss	2110	auc


• Driver located in standard 4" junction box

• WS-42505 is CEC Title 24 Compliant

		Watt	LED Lumens	Delivered Lumens	Finis	sh
WS-42505	1 Light	8.5W	230	220		
WS-42514	2 Lights	16W	518	490	PN	Polished Nickel
WS-42524	3 Lights	24.5W	865	805		

Example: WS-42505-PN

For 277V special order, add an "F" before the finish: **WS-42524F-PN**



Rondelle



Inspired by collectible antique pole-top glass insulators, now illuminated as nostalgic lighting fixtures.

Bristol

15 inch Sconce, 20 inch & 28 inch LED Bath or Sconce











Illuminating Conventional Wisdom.

Handsome traditional styling upgraded with modern LED technology.



Color Temp: 2700K

CRI: 90

 Dimming:
 100% – 10%

 Rated Life:
 80,000 hours

Input:

120V

• Modern technology, traditional design


• Mouth blown etched triplex glass with soft square edges

• Cast metal end caps and matching rectangular back plate

• Mount vertically or horizontally to standard 4" junction box

• No transformer or driver required

Bristol





	Length	Watt	LED Lumens	Delivered Lumens	Finish
WS-7115	15"	19W	1462	990	
WS-7120	20"	25.5W	1845	1345	AN Antique Nickel
WS-7128	28"	37.5W	2925	1935	

Example: WS-7120-AN






Ashton















Example: WS-39513-PN

For 277V special order, add an "F" before the finish: **WS-39513F-PN** For 3000K add "-30", 3500K add "-35" before finish: **WS-39513-35-PN**

WACLIGHTING.COM

Dunhill 20 inch & 26 inch LED Bath or Sconce









Classic design never goes out of style.

CRI:

Dimming: 100% - 10% ELV Rated Life: 50,000 hours

Input: 120V (277V special order)

- **Color Temp:** 2700K (3000K/3500K special order) Clean line of light with an energized personality
 - Etched triplex opal glass diffuser provides even illumination
 - Mount vertically or horizontally
 - Conversion plate for 4" junction box included
 - Transformer located in standard 2" x 4" junction box



Elementum

13 inch, 22 inch & 30 inch LED Bath or Sconce



True chemistry between light and style.

Color Temp: 2700K (3000K / 3500K special order)

CRI: 90

Dimming: 100% - 10% ELV **Rated Life:** 80,000 hours

Input: 120V (277V special order)

- IP65 wet location rated
- A streamlined luminaire sealed to meet healthcare facility requirements
- Etched triplex opal glass provides even illumination
- Mount vertically or horizontally on a standard 4" junction box
- No transformer or driver required














Elementum





		Watt	LED Lumens	Delivered Lumens	Finis	h	
WS-7213	13"	15.5W	1118	730			
WS-7222	22"	30.5W	2236	1505	BN CH	Brushed Nickel Chrome	
WS-7230	30"	39.5W	2925	1955			

Example: WS-7222-CH

For 277V, add an "F" before the finish: **WS-7222F-CH**For 3000K add "-30"; 3500K add "-35" before the finish: **WS-7222-30-CH**

Soho







11 inch, 17 inch & 23 inch LED Bath or Sconce



Color Temp: 2700K (3000K/3500K special order) • Rounded glass to give a unique appeal to a

CRI: 90

Dimming: 100% - 10% ELV

Rated Life: 50,000 hours

Input: 120V (277V special order)


 Rounded glass to give a unique appeal to a tried and true look

• Etched triplex opal glass provides even illumination

• Mount vertically or horizontally

• Conversion plate for 4" junction box included

 \bullet Transformer located in standard 2" x 4" junction box



		Watt	LED Lumens	Delivered Lumens	Finish		
WS-6111	11"	16W	700	520			
WS-6117	17"	25W	1170	860	BN Brusi CH Chro	hed Nickel ome	
WS-6123	23"	33.5W	1597	1245			

Example: WS-6117-BN

For 277V special order, add an "F" before the finish: **WS-6117F-BN** For 3000K add "-30", 3500K add "-35" before finish: **WS-6117-35-PN**

Soho



Urban chic for luxury baths.

Svelte









16 inch, 22 inch & 34 inch LED Bath or Sconce





Color Temp: 2700K (3000K / 3500K special order)


CRI: 90

Dimming: 100% - 10% ELV **Rated Life:** 80,000 hours

Input: 120V (277V special order)

- Gracefully slender at 3 inches in width
- 5mm thick mitered glass with ceramic glaze
- Mount vertically or horizontally to standard 2" x 4" junction box
- $\bullet \ No \ transformer \ or \ driver \ required$
- Conversion plate for 4" junction box included

WACLIGHTING.COM





Kube

C (STEP) US



5 inch Sconce, 12 inch & 22 inch LED Bath





Color Temp: *2700K* **CRI:** *90*

Dimming: 100% - 10% ELV Rated Life: 60,000 hours

Input: 120V

Acid etched solid blocks of water clear glass

 $\bullet \ \mathsf{Each} \ \mathsf{light} \ \mathsf{also} \ \mathsf{contains} \ \mathsf{a} \ \mathsf{powerful} \ \mathsf{task} \ \mathsf{downlight} \\$

 Driver located in standard 4" junction box with minimum inside dimensions of 3½" x 3½" x 1½"


• ADA compliant for WS-44505


• 277V option available for WS-44505 & WS-44512 (special order)

• WS-44522 has Universal Driver (120V-220V-277V)

		Watt	LED Lumens	Delivered Lumens	Finish
WS-44505*	1 Light	18W	675	605	
WS-44512*	2 Lights	32W	1554	1355	CH Chrome
WS-44522	3 Lights	47.5W	2346	2210	

Example: WS-44505-CH





WS-44522



Frosty solid etched glass cubes illuminate enchantingly.

Vie









18 inch, 24 inch & 36 inch LED Bath or Sconce









Color Temp: 2700K (3000K / 3500K special order) • Sleek elegance for narrow applications


CRI:

Dimming: 100% - 10% ELV Rated Life: 80,000 hours

Input: 120V (277V special order) A complete collection of contemporary sconces and bath.

- 3 inch wide format
- Silk-screened glass with a white ceramic glazed interior
- Mount vertically or horizontally to a standard 2" x 4" junction box
- Conversion plate for 4 inch junction box included
- No transformer or driver required



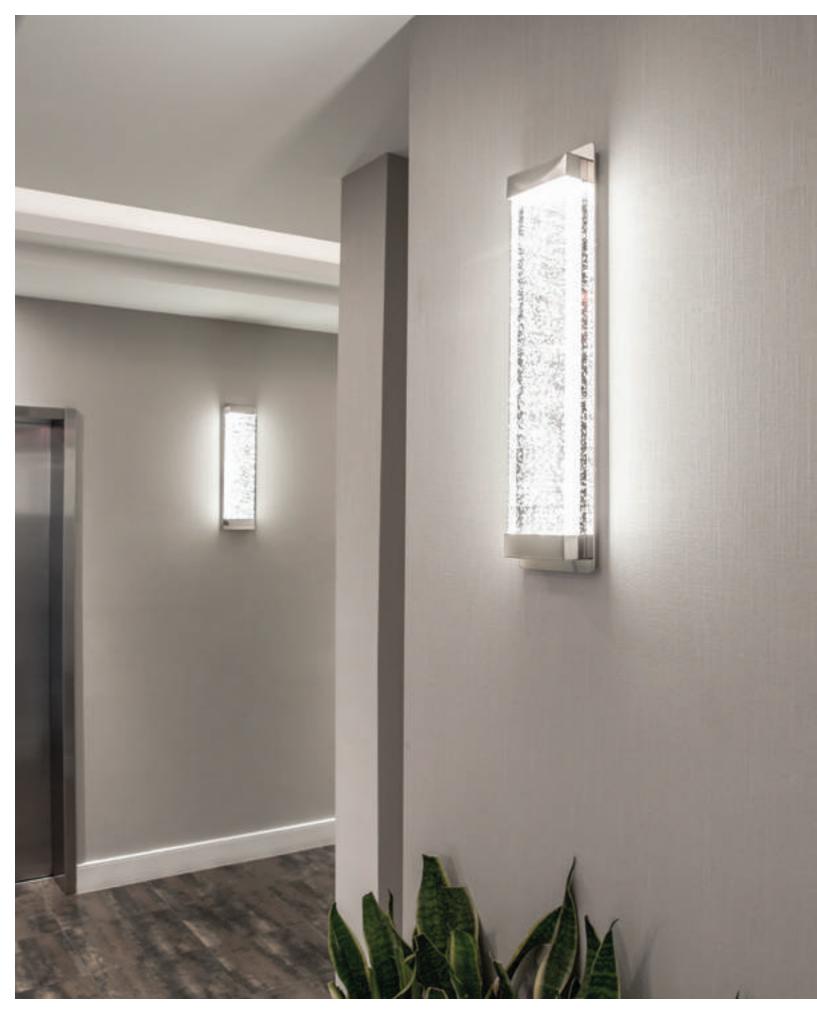



LED Sconces + Swing arms

dweLED sconces are available in a variety of styles and sizes to complement current architectural interiors, from hospitality to upscale residential.

Beautiful ambient illumination from sconces can help define the perimeters of a space while also adding a flattering layer of light at the face level to occupants in the room that is unachievable from overhead lighting. The soft glow of dweLED sconces will create an ambience while the clean designs add visual interest to any room or hallway. Within this section, you will find a timeless variety of generously proportioned wall sconces that also meet ADA requirements. Certain designs also offer universal voltage input or 277V and emergency battery-backup special order options. This opens opportunities for dweLED sconces to add refinement to public spaces while providing important functional service.



		Watt	LED Lumens	Delivered Lumens	Finis	h	
WS-12713	13"	5.5W	415	70			
WS-12718	18"	10.5W	830	140	PN	Polished Nickel	LA THE
WS-12724	24"	10.5W	830	160			

WACLIGHTING.COM

Example: WS-12718-PN

For 277V, add an "F" before the finish: WS-12718F-PN



	Watt	LED Lumens	Delivered Lumens	Finish
WS-12712	16W	772	559	PN Polished Nickel

Example: WS-12712-PN

Bric7 inch LED Sconce









Luminary building block.



Color Temp: 3000K (2700K / 3500K special order)

CRI: 90

Dimming: 100% - 10% ELV **Rated Life:** 80,000 hours

Input: 120V (277V special order)

• Concealed hardware for a finished look at any viewing angle

 \bullet Sconce may be rotated 180° when mounting

 Mounts on a 2" x 4" horizontal junction box or approved wiring compartment within fixture

• Conversion plate for 4" junction box included

• Replaceable LED module


• No transformer or driver required

3"	7"	
		3'

	Watt	LED Lumens	Delivered Lumens	Finish
WS-11807	9W	800	660	BN Brushed Nickel WT White BO Brushed Bronze

Example: WS-11807-BN

For 277V special order, add an "F" before the finish: **WS-11807F-BN** For 2700K add "-27"; 3500K add "-35" before the finish: **WS-11807-27-BN**

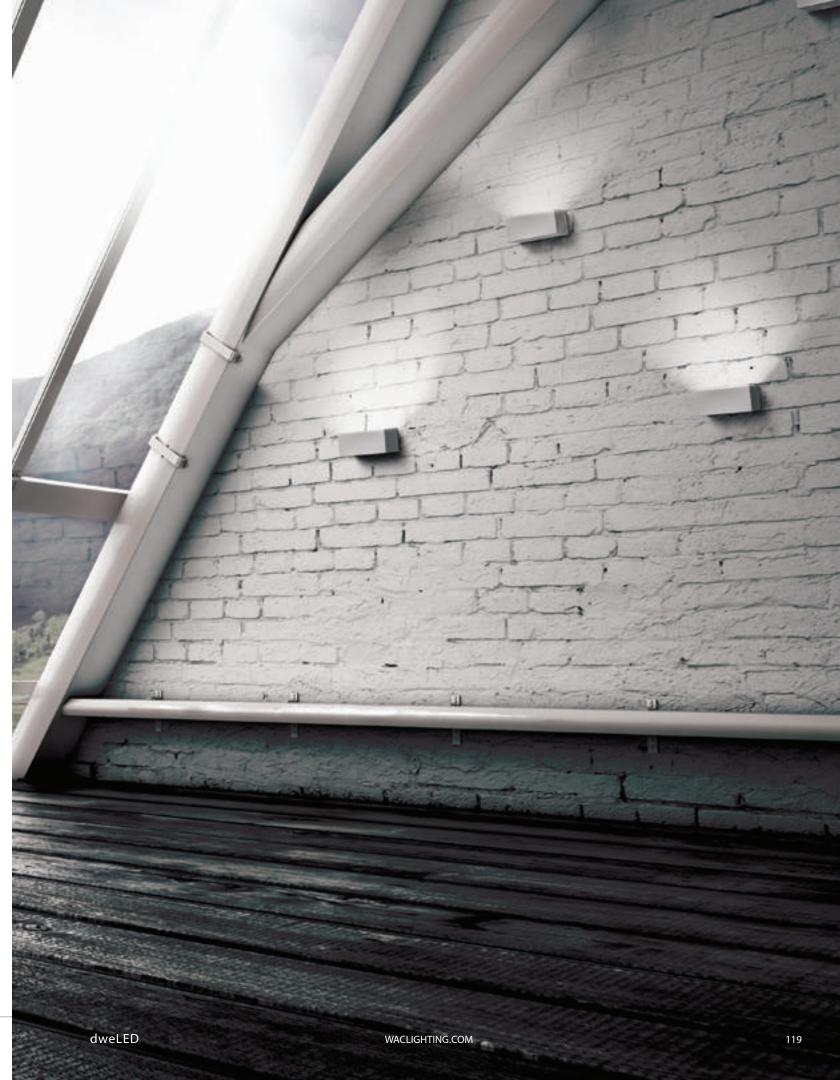





WACLIGHTING.COM

Example: WS-25612-WT

For emergency battery, add -EM after the finish: WS-25612-WT-EM For 2700K add "-27"; 3500K add "-35" before the finish: WS-25612-27-WT



		Watt	LED Lumens	Delivered Lumens	Finish
WS-7312	12"	15W	1125	615	BN Brushed Nickel
WS-7318	18"	20.5W	1555	890	CH Chrome

Example: WS-7318-BN

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-7312-27-BN**



	Watt	LED Lumens	Delivered Lumens	Finish
WS-14610	17.5W	775	555	BN Brushed Nickel

WACLIGHTING.COM

Example: WS-14610-BN

Link 14 inch LED Sconce









Lovely as a single sconce or installed in multiples as an interconnected display.

Color Temp: 3000K

CRI: 90

Dimming: 100% - 10% ELV

Rated Life: 38,000 hours **Input:** 120 - 277V

• Silk-screened glass diffuser with a white ceramic glaze

• Mount vertically or horizontally

 \bullet Conversion plate for 4" junction box included

• Driver located in a standard 2" x 4" junction box

• Universal driver (120V-220V-277V)


14" 2½"


	Watt	LED Lumens	Delivered Lumens	Finish
WS-10614	20.5W	985	380	BN Brushed Nickel

WACLIGHTING.COM

Example: WS-10614-BN



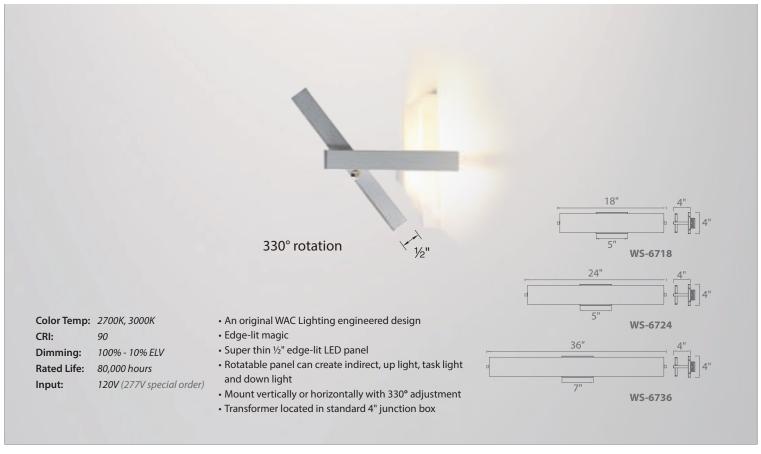

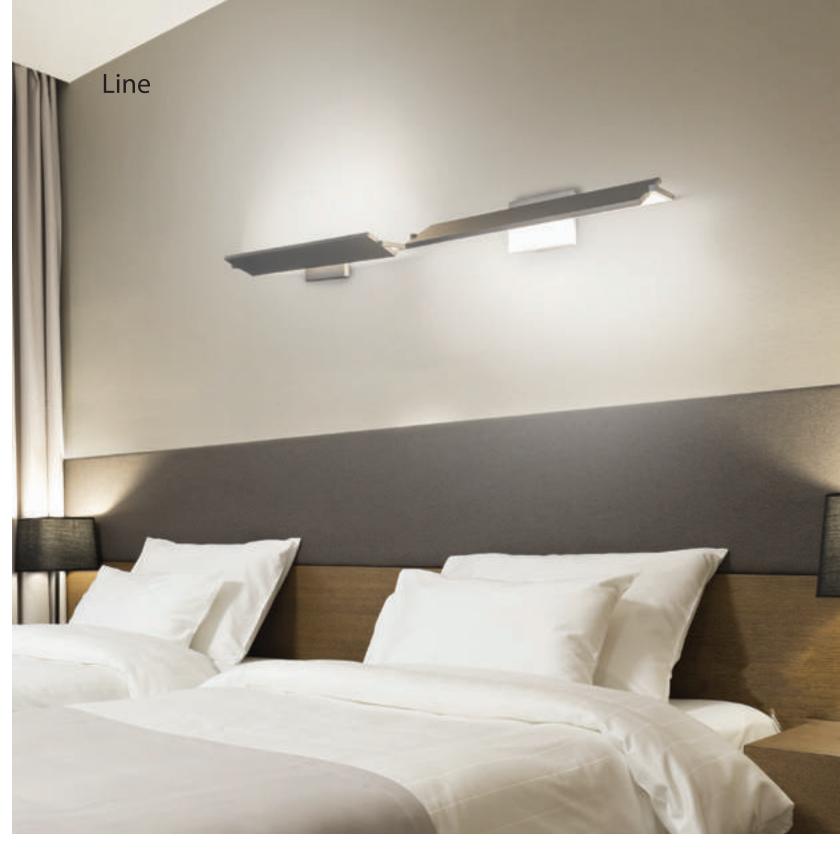

		Watt	Color Temp	LED Lumens	Delivered Lumens	Finish
WS-6718-27 WS-6718-30	18"	11.8W 11.8W	2700K 3000K	609 667	425 464	
WS-6724-27 WS-6724-30	24"	16W 15.8W	2700K 3000K	827 912	626 675	AL Brushed Aluminum
WS-6736-27 WS-6736-30	36"	22.1W 22.3W	2700K 3000K	1217 1333	903 987	

Example: **WS-6724-30-AL**For 277V, add an "F" before the color temperature: **WS-6724F-30-AL**

Elementum















		Watt	LED Lumens	Delivered Lumens	Finis	h	
WS-7213	13"	15.5W	1118	730			
WS-7222	22"	30.5W	2236	1505	BN CH	Brushed Nickel Chrome	
WS-7230	30"	39.5W	2925	1955			

Example: WS-7222-CH

CRI:

Input:

Dimming: Rated Life:

• IP 65 wet location listed

For 277V, add an "F" before the finish: **WS-7222F-CH**

Color Temp: 2700K (3000K / 3500K special order)

120V (277V special order)

• Mount vertically or horizontally on a standard 4" junction box

100% - 10% ELV

80,000 hours

• A streamlined luminaire sealed to meet healthcare facility requirements

• No transformer or driver required

For 3000K add "-30"; 3500K add "-35" before the finish: **WS-7222-30-CH**

WS-7230

WS-7222

WS-7213



True chemistry between light and style

Vie

14 inch & 20 inch LED Sconce















Color Temp: 2700K (3000K / 3500K special order)


CRI: 90

Dimming: 100% - 10% ELV **Rated Life:** 80,000 hours

Input: 120V (277V special order)

- Classic architectural look perfect for any space
- Water clear bent glass with a white ceramic glazed interior
- Mount vertically or horizontally on a standard 4" junction box
- Conversion plate for 4 inch junction box included
- No transformer or driver required







		Watt	LED Lumens	Delivered Lumens	Finis	h	
WS-6614	14"	18.5W	1462	755	BN	Brushed Nickel	
WS-6620	20"	24.5W	1845	1040	СН	Chrome	

Example: WS-6614-BN

For 277V, add an "F" before the finish: **WS-6614F-BN**For 3000K add "-30"; 3500K add "-35" before the finish: **WS-6614-30-BN**



	Watt	LED Lumens	Delivered Lumens	Finish	
WS-49618	11W	708	424	SN Satin Nickel	:

Example: WS-49618-SN

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-49618-35-SN**


Havana









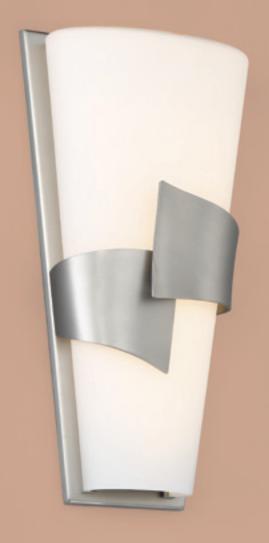



Wrapped in a warm embrace and reminiscent of yesteryear.

CRI:

Dimming: 100% - 10% ELV Rated Life: 85,000 hours Input: 120-277V

- **Color Temp:** 3000K (2700K / 3500K special order) Heavy gauge hand-formed nickel-plated metal work
 - Mouth blown etched triplex opal glass diffuser provides even illumination
 - Driver located in standard 4" junction box
 - Universal driver (120V-220V-277V)





	Watt	LED Lumens	Delivered Lumens	Finish	
WS-47617	16W	967	522	SN Satin Nickel	:

Example: WS-47617-SN

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-47617-27-SN**



	Watt	LED Lumens	Delivered Lumens	Finish
WS-40615	20W	1482	887	SN Satin Nickel : -

Example: WS-40615-SN


For 2700K add "-27"; 3500K add "-35" before the finish: **WS-40615-27-SN**



	Watt	LED Lumens	Delivered Lumens	Finish	
WS-43613	16W	1134	761	SN Satin Nickel	:

Example: WS-43613-SN

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-43613-27-SN**











Modern for today while nostalgic of a different time

Color Temp: *3000K* (2700K / 3500K special order)

CRI: 90

 Dimming:
 100% - 10% ELV

 Rated Life:
 55,000 hours

 Input:
 120-277V

- Art deco inspired contemporary design updated with LED technology
- Mouth blown etched triplex opal glass diffuser provides even illumination
- Heavy gauge nickel plated hardware
- Driver located in standard 4" junction box
- Universal driver (120V-220V-277V)

	Watt	LED Lumens	Delivered Lumens	Finish
WS-45620	18W	1377	817	SN Satin Nickel : -

Example: WS-45620-SN

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-45620-27-SN**



	vvatt	LED Lumens	Delivered Lumens	Finish
WS-41618	15.5W	1207	870	SN Satin Nickel : -

Example: WS-41618-SN

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-41618-27-SN**





WACLIGHTING.COM

Example: WS-87618-SN

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-87618-27-SN**

136

Coco











The Elegant Feminine.

Color Temp: 3000K (2700K / 3500K special order)


CRI: 90

 Dimming:
 100% - 10% ELV

 Rated Life:
 80,000 hours

 Input:
 120-277V

- Art deco inspired contemporary design
- Mouth blown etched triplex opal glass diffuser provides even illumination
- Heavy gauge nickel plated hardware
- Driver located in standard 4" junction box
- Universal driver (120V-220V-277V)



	Watt	LED Lumens	Delivered Lumens	Finish
WS-46609	21W	1377	873	SN Satin Nickel : -

Example: WS-46609-SN

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-46609-27-SN**

Stella







CALLEGRAIA

8 inch, 12 inch & 17 inch LED Sconce



Classy and versatile pocket sconce





WS-13212

Color Temp: 3000K (2700K / 3500K special order)

CRI: 90

Dimming: 100% - 10% ELV Rated Life: 80,000 hours

Input: 120V (277V special order)

- Water clear bent glass with a silk-screened white ceramic glazed interior
- Heavy gauge nickel plated hardware
- Etched glass diffuser top and bottom
- No transformer or driver required

r -	6"	3"	17"
	WS-	13217	

		Watt	LED Lumens	Delivered Lumens	Finis	sh	
WS-13208	8"	9.5W	727	335			
WS-13212	12"	15.5W	1118	495	BN	Brushed Nickel	
WS-13217	17"	25.5W	1845	895			
W3-13217	17	23.377	1043	073			

Example: WS-13217-BN

For 277V, add an "F" before the finish: **WS-13217F-BN**

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-13217-27-BN**



	Watt	LED Lumens	Delivered Lumens	Finish
WS-32621	15.5W	1030	557	BN Brushed Nickel

Example: WS-32621-BN

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-32621-27-BN**



	Watt	LED Lumens	Delivered Lumens	Finish	
WS-42618	20W	1476	827	SN Satin Nickel	: -

WACLIGHTING.COM

Example: WS-42618-SN

For 2700K add "-27"; 3500K add "-35" before the finish: **WS-42618-27-SN**



	Watt	LED Lumens	Delivered Lumens	Finish
WS-12517	20.5W	1132	515	BN Brushed Nickel

Example: WS-12517-BN

For 277V, add an "F" before the finish: $\mathbf{WS-12517F-BN}$

Manhattan





14 inch, 20 inch & 26 inch LED Close to Ceiling Mount



Luminous fabric shade



FM-13114



Color Temp: 2700K

CRI:

90

Dimming: 100% - 10% ELV 50,000 hours

Rated Life: 120V Input:

• Trimless fabric shade illuminates evenly

• Etched acrylic diffuser below with no visible hardware

• Mounts to a standard 4" junction box

• No transformer or driver required



		Watt	LED	Lumens	Finish
FM-13114	14"	31W	2405	2205	
FM-13120	20"	36W	2405	2360	BN Brushed Nickel
FM-13126	26"	39W	3000	2825	

WACLIGHTING.COM


Example: WS-13114-BN



			Watt	LED Lumens	Delivered Lumens	Finish
U	7"	WS-13107	6W	284	110	
	15"	WS-13115	10.5W	566	250	BN Brushed Nickel BR Brushed Brass BO Brushed Bronze PN Polished Nickel
	22"	WS-13122	15.5W	851	365	

Example: WS-13107-PN


For 277V, add an "F" before the finish: WS-13107F-PN

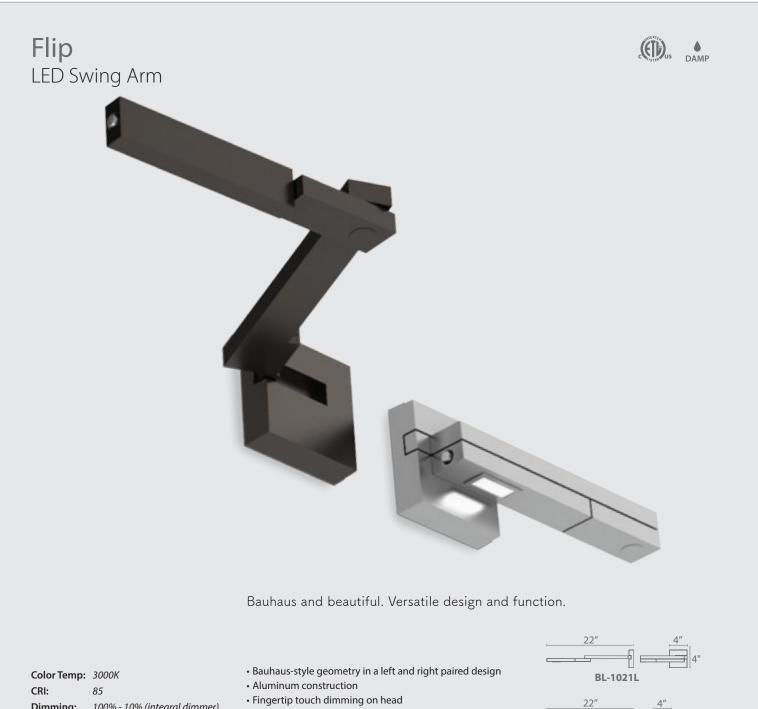

Dimming: 100% - 10% (integral dimmer)

Rated Life: 30,000 hours Input: 100-240V

- Two 12 inch cord covers included for portable installation
- Mounts to standard 4" junction box when hard-wired
- Driver located inside fixture



		Watt	LED Lumens	Delivered Lumens	Finish
Left	BL-1021L	8.5W	489	315	BZ Bronze
Right	BL-1021R	8.5W	489	315	TT Titanium

WACLIGHTING.COM

Example: BL-1021L-BZ

Stretch LED Swing Arm





Customizable, functional aesthetic for integration with all interior furnishing styles.



Color Temp: 3000K

CRI: 85

Dimming: 100% - 10% (integral dimmer)

Rated Life: 30,000 hours Input: 120V

• A contemporary utilitarian design

• Flexible, yet fixable rubber tube for directing light

 \bullet Two 12 inch cord covers included for portable installation when hard-wired

Mounts on standard 2" x 4" vertical junction box
Conversion plate for 4" junction box included

• Fingertip touch dimming on back plate


• Integral driver



	Watt	LED Lumens	Delivered Lumens	Finish				
BL-1630	7.5W	489	260	BK Black WT White				


Example: BL-1630-WT



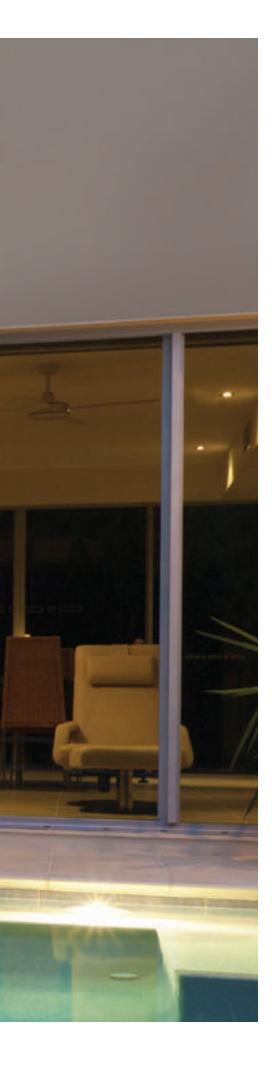


LED Outdoor

dweLED outdoor wall sconces add light and style to building exteriors, often serving more than one function. The right outdoor selection is both functional and decorative in providing comfortable nighttime illumination while also adding visual interest to the building envelope. Designed for ambient lighting and architectural complement, dweLED outdoor luminaires are equipped with specifically engineered, energy efficient LEDs to accent architectural surfaces for dramatic visual intrigue while delivering safety illumination of pathways and entrances. Clean designs maintain a timeless architectural aesthetic that reflects the dweLED brand while thoughtful engineering and quality construction delivers lasting robust performance.

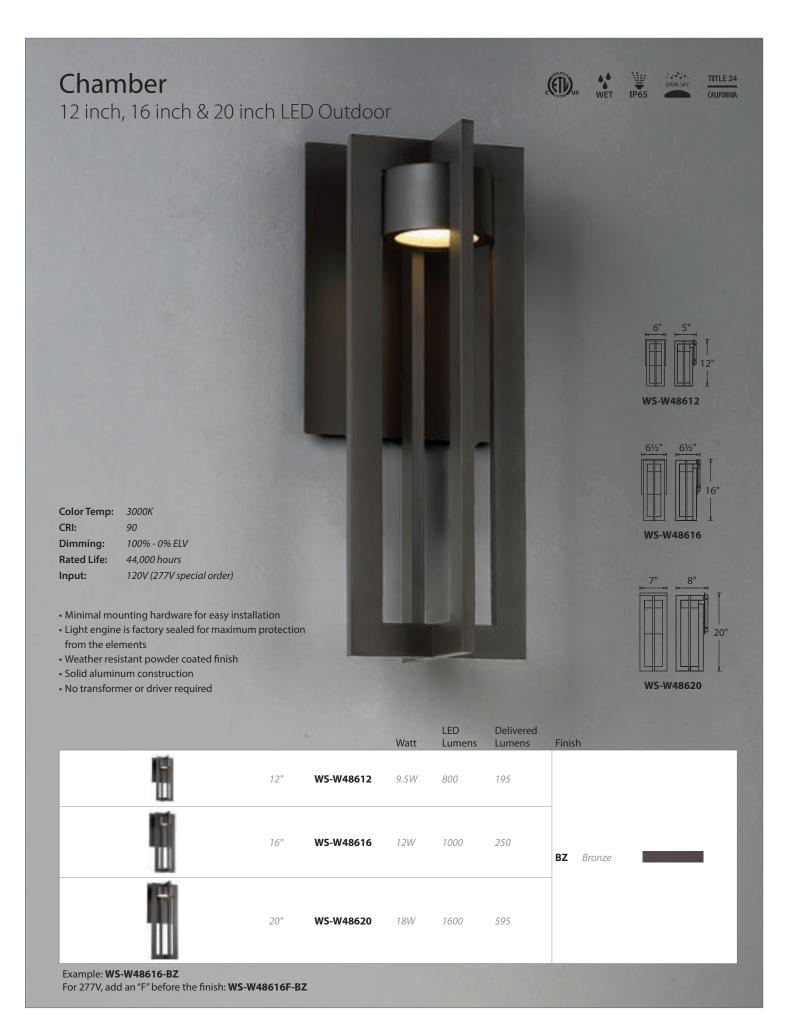

Chamber












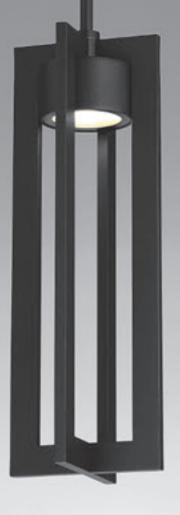

Shine a light on the soul within



Color Temp:

3000K

CRI:

90

Dimming:

100% - 10% ELV

Rated Life:

44,000 hours

Input:

120V (277V special order)

- Hang Straight Swivel
- Minimal mounting hardware for easy installation
- Light engine is factory sealed for maximum protection from the elements
- Weather resistant powder coated finish
- Solid aluminum construction
- 10' of wire included to extend pendant up to a total of 120", three 12" and one 6" downrods included (additional downrods available)
- No transformer or driver required


	Watt	LED Lumens	Delivered Lumens	Finish
PD-W48616	12W	1000	295	BZ Bronze

Example: PD-W48616-BZ

For 277V special order, add an "F" before the finish: **PD-W48616F-BZ**



Chamber 20 inch LED Outdoor Post Lantern Shine a light on the soul within p. 148 Outdoor Sconce p. 149 Outdoor Pendant Color Temp: 3000K CRI: Dimming: 100% - 10% ELV Rated Life: 44,000 hours 120V (277V special order) Input: • Mounts on a 3" maximum diameter post (not included) • Minimal mounting hardware for easy installation • Light engine is factory sealed for maximum protection from the elements 20" • Weather resistant powder coated finish • Solid aluminum construction • No transformer or driver required LED Delivered Lumens Lumens Finish



Example: **PM-W48620-BZ**For 277V special order, add an "F" before the finish: **PM-W48620F-BZ**

Oberon















A timeless contemporary guardian


Color Temp: *3500K* **CRI:** *90*

Dimming: 100% - 10% ELV **Rated Life:** 54,000 hours

Input: 120V (277V special order)


• Modern elegance brought to your backyard

- Bent opal glass provides even illumination
- Weather-resistant powder coated finish
- Light engine is factory sealed for maximum protection from the elements
- Mount horizontally or vertically
- Solid aluminum construction
- No transformer or driver required



WS-W45714

WS-W45720

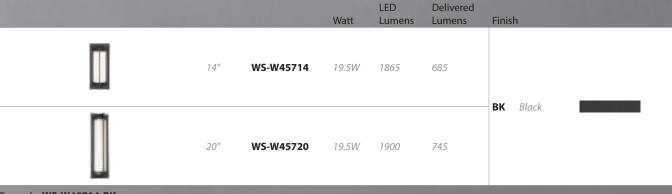

Example: WS-W45714-BK

For 277V, add an "F" before the finish: WS-W45720F-BK

Funnel











12 inch & 17 inch LED Outdoor




Virtuosic composition of light and form.


Color Temp: 3000K

Dimming: 100% - 10% ELV or 0-10V

Rated Life: 75,000 hours Input: 120 - 277V

- Up & down light
- Light engine is factory sealed for maximum protection from the elements
- Weather resistant powder coated finish
- Die-cast aluminum construction
- Mount vertically or horizontally (WS-W37617)
- Driver located inside the fixture
- Universal driver (120V-220V-277V)



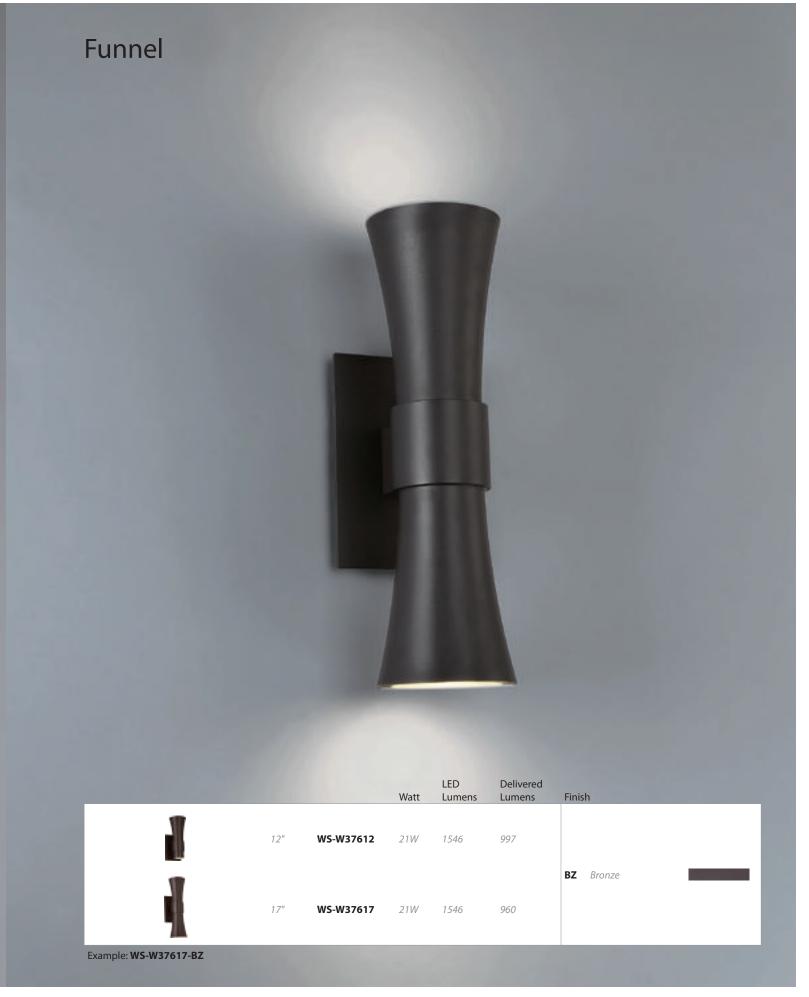

Mod

6 inch LED Outdoor















Modernistic and always in fashion. A clean asymmetrical downlight.

Color Temp: 3000K CRI:

Dimming: 100% - 10% ELV

Rated Life: 70,000 hours Input: 120-277V

- Low profile with effective path illumination
- Weather-resistant powder coated finish
- Light engine is factory sealed for maximum protection from the elements
- Diecast aluminum construction
- Luminaire may be rotated 180° when mounting
- Driver located inside the fixture



	Watt	Lumens	Lumens	Finish
WS-W65607	15W	1165	850	BZ Bronze GH Graphite

Example: WS-W65607-BZ

Over-Under













Playful indirect sconce with nostalgic contemporary appeal.

Color Temp: 3000K

CRI: 90

Dimming: 100% - 5% ELV

Rated Life: Input:

46,000 hours 120V


• COB shooting from below upwards into the reflector


• Powerful LED light source providing soft indirect light

• High reflectance white reflector ensures effective delivery of lumens to a path or an area

• Die-cast aluminum

• No transformer or driver required





LED

Delivered

Example: WS-W20709-BZ

Vertigo









12 inch & 16 inch LED Outdoor



Spellbinding style with a mid-century modern touch.


Color Temp: *3000K* **CRI:** *90*

Dimming: 100% - 5% ELV
Rated Life: 54,000 hours


Input: 120V

• Weather-resistant powder coated finish

- Light engine is factory sealed for maximum protection from the elements
- Replacement glass available
- Solid aluminum construction
- Mouth blown etched triplex glass
- No transformer or driver required



Delivered



WS-W34712

WS-W34714

		Watt	Lumens	Lumens	Finish
12"	WS-W34712	12W	700	600	
16"	WS-W34714	12W	755	725	BK Black

Example: WS-W34712-BK

For 277V, add an "F" before the finish: WS-W34712F-BK


Gaia














Mid-century modern refined.

Color Temp: 3000K

100% - 0% ELV Dimming: Rated Life: 44,000 hours Input: 120V

- Black and white have never looked so good together
- Light engine is factory sealed for maximum protection from the elements
- Replacement glass available
- Weather-resistant powder coated finish
- Mouth blown etched triplex opal glass
- No transformer or driver required



VV 3-VV 3Z / 1Z

Delivered

WS-W32714

			Watt	Lumens	Lumens	Finish
5	12"	WS-W32712	9.5W	625	495	− BK Black
	14"	WS-W32714	12W	755	635	BR Black
Evample: WS-W32714-RK						

Hurricane









10 inch & 14 inch LED Outdoor



A modern interpretation of a familiar icon representing a refuge

Color Temp: 3000K


CRI: 90


Dimming: 100% - 5% ELV

Rated Life: 54,000 hours Input: 120V

• Light engine is factory sealed for maximum protection from the elements

- Sconce may be rotated 180° when mounting
- Solid aluminum construction
- Replacement glasses available
- Mouth blown etched triplex glass
- No transformer or driver required





WS-W38710

Delivered

WS-W38714

			Watt	Lumens	Lumens	Finish
	10"	WS-W38710	11.5W	700	500	DV. State
	14"	WS-W38714	12.5W	750	500	BK Black
Evample: WS-W38710-RK						

LED

Abode














A Humble Way of Light

Color Temp: *3000K* **CRI:** *90*

Dimming: 100% - 5% ELV **Rated Life:** 44,000 hours

Input: 120V (277V option available)

- Bright, but diffused illumination makes for a perfect porch light
- Spun aluminum shield
- Replacement glass available
- Light engine is factory sealed for maximum protection from elements
- Weather resistant powder coat finish
- Mouth blown etched triplex glass diffuser provides even illumination
- No transformer or driver required





WS-W48709

Delivered

		Watt	Lumens	Lumens	Finish	
9"	WS-W48709	9.5W	530	310	DV Plack	
11"	WS-W48711	12W	650	420	- BK Black	

Example: WS-W48709-BK

For 277V, add an "F" before the finish: WS-W48709F-BK

Zealous











10 inch & 14 inch LED Outdoor




Fervently passionate but with solemn restraint.

Color Temp: 3000K CRI: 90

100% - 5% ELV Dimming: Rated Life: 44,000 hours

120V (277V special order) Input:

- Front hood provides excellent cut off for a discrete but functional path light
- Weather-resistant powder coated finish
- Light engine is factory sealed for maximum protection from the elements
- Solid aluminum construction
- No transformer or driver required



			Watt	LED Lumens	Delivered Lumens	Finish
	10"	WS-W53610	9.5W	700	330	
	14"	WS-W53614	12W	840	365	BZ Bronze GH Graphite
Example: WS-W53610-BZ						

For 277V, add an "F" before the finish: **WS-W53614F-BZ**

Icon


14 inch LED Outdoor













Color Temp: 3000K CRI: Dimming:

100% - 5% ELV Rated Life: 54,000 hours


Input: 120 - 277V • Simple shape, simple idea, infinite applications

• Shielded light source for great low-glare illumination

• Driver located inside the fixture

• Up & down light

• Universal driver (120V-220V-277V)



		Watt	Lumens	Lumens	Finish
	WS-W54614	11W	845	455	AL Brushed Aluminum BZ Bronze
Example: WS-W54614-BZ					

LED

Delivered


Mesh













Mesmerizing movement when viewed in transition

Color Temp: 3000K

CRI: Dimming:

100% - 0% ELV

44,000 hours

Rated Life: Input: 120V (277V special order)

• Adds a dramatic and industrial flair to any space

- Solid heavy gauge aluminum mesh creates an optical illusion
- Weather resistant powder coated finish
- Light engine factory sealed for maximum protection from the elements

WS-W43709

WS-W43712



Delivered

Lumens



Finish



No transformer or driver required

4.5W	310	55		
7W	600	85	BZ	Bronze

LED

Lumens



15" WS-W43715 9.5W

800

Watt

125

Example: WS-W43709-BZ

162

For 277V, add an "F" before the finish: WS-W43709F-BZ

Nest
















A harmonious blend of Modern with Arts & Crafts

Color Temp: *3000K* **CRI:** *90*

 Dimming:
 100% - 5% ELV

 Rated Life:
 54,000 hours

 Input:
 120V

• Extruded aluminum louvers create a dramatic pattern of light to generate interest

• Solid aluminum construction


• Light engine is factory sealed for maximum protection from the elements

• Weather resistant powder coated finish

 \bullet No transformer or driver required



Delivered



...

WS-W26716

			vvatt	Lumens	Lumens	FINISH
	12"	WS-W26712	8.5W	180	145	
1	16"	WS-W26716	13W	280	210	- BZ Bronze

LED


Steampunk













Color Temp: *3000K* **CRI:** *90*

Dimming: 100% - 10% ELV **Rated Life:** 80,000 hours


Input: 120V (277V special order)

• Clear hammered seeded mouth blown glass creates dramatic pattern of light

Die-cast Aluminum Construction

• Weather resistant powder coated finishes

• No transformer or driver required



Delivered



9" WS-W24509 10W 624 365 BZ Bronze GH Graphite				Watt	Lumens	Lumens	Finish
GH Graphite	9	9"	WS-W24509	10W	624	365	BZ Bronze
	•	13"	WS-W24513	10W	657	440	

LED

Example: WS-W24513-BZ

For 277V special order, add an "F" before the finish: WS-W24513F-BZ



Spa 16 inch & 22 inch LED Outdoor













Dazzling. Shimmering. Sparkle of light.

Color Temp: 3000K CRI:

Dimming: 100% - 0% ELV Rated Life: 54,000 hours


Input: 120V

166


- Hand poured pane of art glass creates beautiful, dramatic patterns of light
- Weather resistant powder coated finish
- Light engine is factory sealed for maximum protection from the elements
- Solid aluminum construction

• No transformer or driver required





WS-W4172	
----------	--

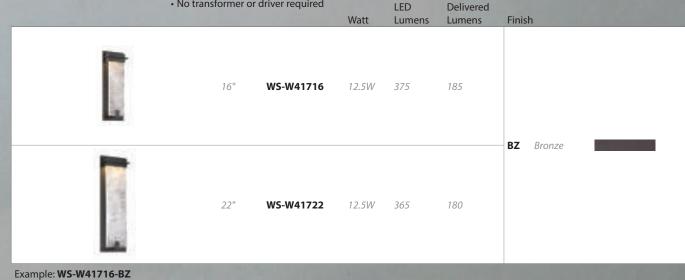

Tao

12 inch & 18 inch LED Outdoor














Architecturally harmonious form.

Color Temp: 3000K CRI: 90

Dimming: 100% - 10% ELV Rated Life: 80,000 hours Input: 120V (277V special order)

- Silver crystal glass window adds visual interest
- Gravity cast aluminum housing
- Minimal mounting hardware for easy installation
- Downlight adds functional path lighting
- Weather resistant powder coated finish
- No transformer or driver required



-W5312	WS-W5318

Length		Watt	LED Lumens	Delivered Lumens	Finish
12"	WS-W5312	11W	830	220	
18"	WS-W5318	15W	1218	250	BZ Bronze

Example: WS-W5318-BZ

For 277V, add an "F" before the finish: WS-W5318F-BZ

18"


Sodor













Color Temp: 3000K

CRI: 90


 Dimming:
 100% - 5% ELV

 Rated Life:
 54,000 hours

 Input:
 120V


• Weather resistant powder coated finishes

- · Heavy aluminum shade provides great glare cutoff
- Light engine is factory sealed for maximum protection from the elements
- Die-cast aluminum construction
- No transformer or driver required



WS-W15708

Steamworks inspired contemporary approach to a traditional lantern.



		Watt	LED Lumens	Delivered Lumens	Finish
8"	WS-W15708	9W	750	315	BZ Bronze
10"	WS-W15710	11.5W	1200	560	GH Graphite

Example: WS-W15708-GH

Folsom











10 inch & 14 inch LED Outdoor Sconce



Breakout structural design with clean modern elegance.

Color Temp: *3000K* **CRI:** *90*


Dimming: 100% - 10% ELV


Rated Life: 50,000 hours

Input: 120V (277V special order)

• UV rated acrylic

- Weather-resistant powder coated finish
- Light engine is factory sealed for maximum protection from the elements
- Solid aluminum construction
- Mount vertically or horizontally
- No transformer or driver required







Example: WS-W23610-GH

For 277V special order, add an "F" before the finish: $\mathbf{WS\text{-}W23610F\text{-}GH}$

Axis












7 inch & 11 inch LED Outdoor








Color Temp: *3000K* **CRI:** *90*

Dimming: 100% - 10% ELV Rated Life: 54,000 hours

Input: 120V (277V special order)

- Mouth blown etched triplex opal glass diffuser provides even illumination
- Mount as wall mount or ceiling mount
- Weather-resistant powder coated finish
- Light engine is factory sealed for maximum protection from the elements
- Solid aluminum construction
- No transformer or driver required



WS-W50607

Delivered





WS-W50611

Watt	Lumens	Lumens	Finish

LED

0	7"	WS-W50607	9.5W	820	605	
	11"	WS-W50611	18W	1640	1155	TT Titanium

Example: WS-W50607-TT

For 277V, add an "F" before the finish: WS-W50607F-TT

Latitude

10 inch, 14 inch & 20 inch LED Outdoor













Classic architectural lighting forms offered in complementary sizes

Color Temp: 3000K CRI: 90

Dimming: 100% - 0% ELV Rated Life: 44,000 hours


Input:


120V (277V special order)

- Classic architectural look that pairs well with a multitude of commercial applications
- Weather resistant powder coated finishes • Light engine factory sealed for maximum
- protection from the elements • Solid aluminum construction
- Etched triplex opal glass diffuser provides even illumination
- No transformer or driver required



WS-W52610





WS-W52620

			Watt	LED Lumens	Delivered Lumens	Finish
	10"	WS-W52610	12W	765	415	
	14"	WS-W52614	17.5W	1255	735	BZ Bronze TT Titanium
	20"	WS-W52620	19W	1220	790	

Example: WS-W52610-TT

For 277V, add an "F" before the finish: WS-W52620F-TT

Uno 15 inch LED Outdoor















This is The One.

Color Temp: 3000K CRI: 90

100% - 10% ELV Dimming: Rated Life: 80,000 hours

Input: 120V (277V special order)

- In a class of its own
- The unique illuminating element on the face indirectly reflects light back towards the viewer in an intriguing dimensional character

Delivered

- May be rotated 180° during mounting
- Solid aluminum construction
- Weather resistant powder coated finishes

LED


• No transformer or driver required


5"	+ + 4"	
	l n h	Ť
		15"

	Watt	Lumens	Lumens	Finish
WS-W5915	15W	1234	875	BZ Bronze GH Graphite WT White
- 1 110 111-04-111				

Example: WS-W5915-WT

For 277V, add an "F" before the finish: **WS-W5915F-WT**

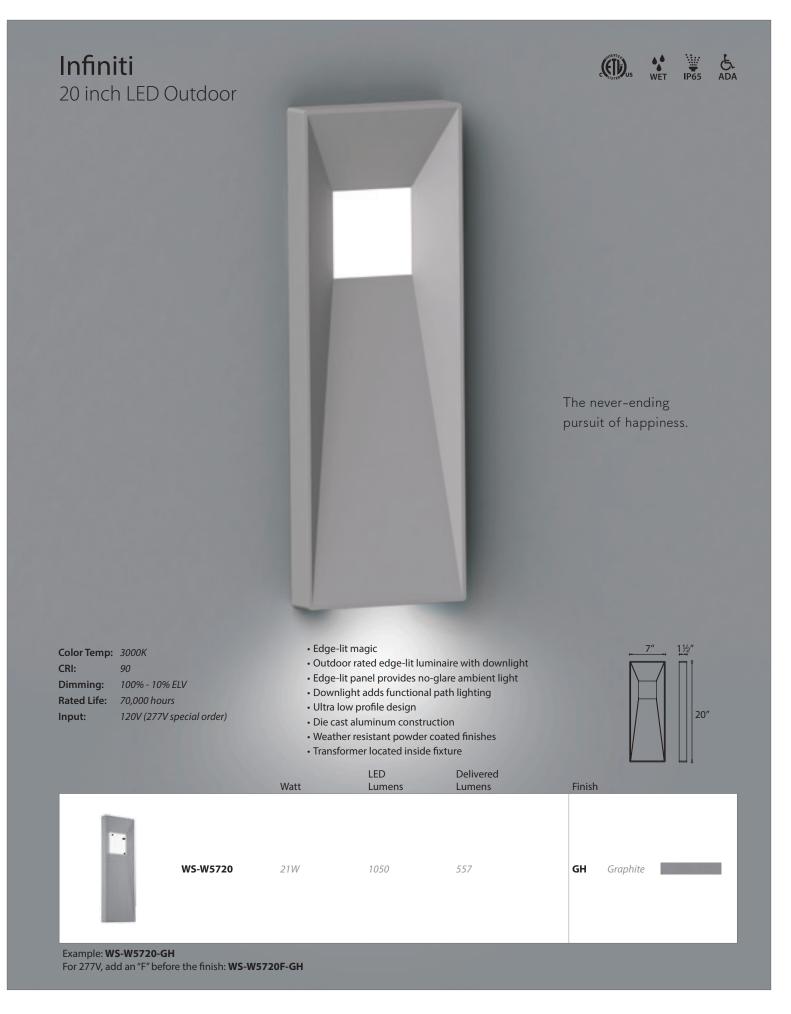

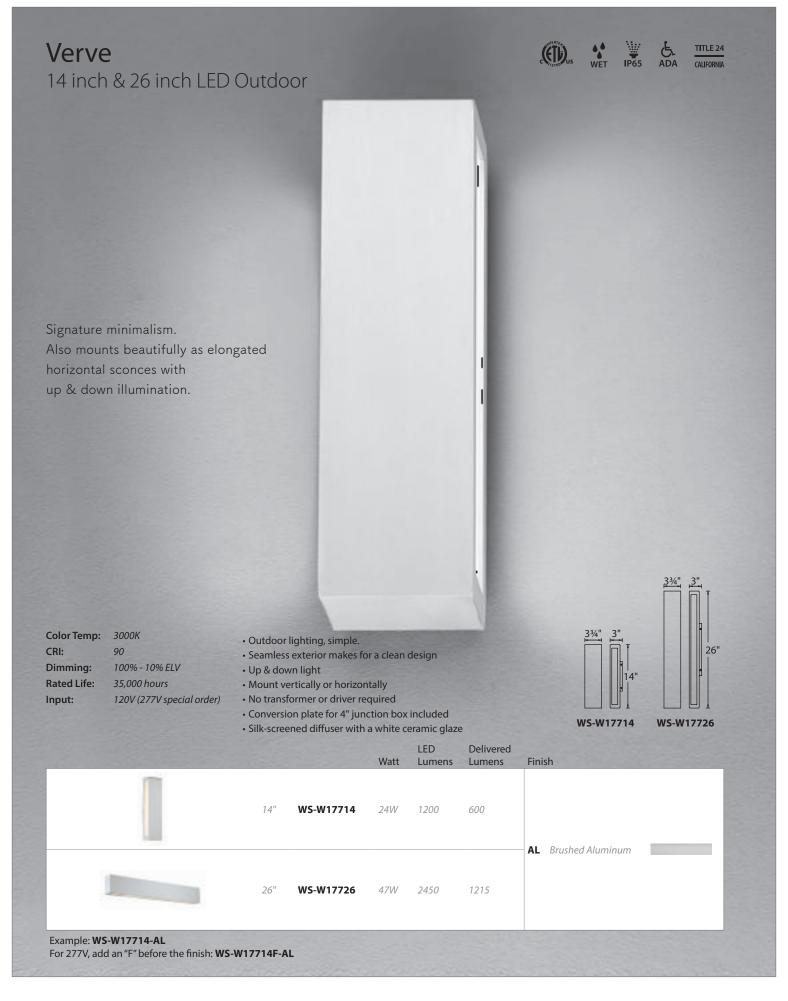




Janus 13 in the 17 in the 8 22 in the LED Outed












Color Temp: *3000K*


Dimming: 100% - 10% ELV **Rated Life:** 80,000 hours

Input: 120V (277V special order)

- Open frame silhouetted indirect LED sconce
- Indirect light for comfortable illumination
- Backlit design for less glare
- Mounted vertically or horizontally
- Solid aluminum construction
- Weather resistant powder coat finishes
- No transformer or driver required







VS-W5812	WS-W5817	WS

			Watt	Lumens	Lumens	Finish
	12"	WS-W5812	15W	1234	340	
	17"	WS-W5817	19W	1615	605	BZ Bronze GH Graphite
-	22"	WS-W5822	30W	2468	960	

Example: WS-W5812-GH

For 277V, add an "F" before the finish: WS-W5812F-GH

Caliber











10 inch & 14 inch LED Outdoor



Light Projection Tuned with Precision

 Color Temp:
 3000K

 CRI:
 90

 Dimming:
 100% - 10% ELV

72,000 hours


120 - 277V


Rated Life

Input:

• Discrete cylinder with minimal mounting hardware

- Up & down light
- Light engine is factory sealed for maximum protection from the elements
- Can be mounted vertically or horizontally
- Solid aluminum construction
- Driver located in standard 4" junction box
- Universal driver (120V-220V-277V)





WS-W36610

WS-W36614

			Watt	LED Lumens	Delivered Lumens	Finish
	10"	WS-W36610	11W	735	485	AL Brushed Aluminum
4	14"	WS-W36614	21W	1500	1080	BZ Bronze BK Black

Numerical Index

BL-1021L144	PD-W24513	165
BL-1021R144	PD-W33620	43
BL-1630145	PD-W48616	149
	PM-W48620	
F		
	W	
FM-400655		
FM-400955	WS-6111	106
FM-401255	WS-6117	
FM-401455	WS-6123	
FM-410953	WS-6614	
FM-411153	WS-6618	
FM-411553		
FM-431357	WS-6620	
	WS-6624	
FM-460650	WS-6636	113
FM-461050	WS-6718	8
FM-461551	WS-6724	8
FM-462251	WS-6736	8
FM-701360	WS-7115	99
FM-711362	WS-7120	90
FM-1311441, 61, 142	WS-7128	
FM-1312041, 61, 142	WS-7213	
FM-1312641, 61, 142	WS-7222	
FM-1661747	WS-7222 WS-7230	
FM-1662247		,
FM-2172019, 49	WS-7312	
FM-21728	WS-7316	
•	WS-7318	
FM-5761456	WS-7322	109
FM-W33612	WS-7334	
FM-W33616	WS-10614	123
FM-W5230658	WS-11807	118
FM-W5230958	WS-12517	14
	WS-12712	117
	WS-12713	
	WS-12718	
P	WS-12724	
	WS-13107	
PD-1371440		
PD-1372040	WS-13115	
PD-1372640	WS-13122	
PD-2275415	WS-13208	
PD-2661126	WS-13212	
PD-2661626	WS-13217	
PD-3172722	WS-14610	122
PD-3173522	WS-20624	
PD-3371812	WS-20635	90
PD-3373212	WS-20646	90
PD-3374312	WS-21611	88
PD-3671036	WS-21622	
PD-3671436	WS-21633	
	WS-25612	
PD-45747	WS-26714	
PD-5114821	WS-26724	
PD-5171232		
PD-5181435	WS-26737	
PD-5191534	WS-32621	
PD-5200833	WS-39513	
PD-5221430	WS-39522	
PD-5231039	WS-40520	103
PD-52313	WS-40526	103
PD-6072325	WS-40615	132
PD-64713	WS-40720	83
	WS-40726	
PD-72718	WS-40738	
PD-72724	WS-41618	
PD-8372027	WS-42505	
PD-8564820		
PD-8566520	WS-42514	
PD-8772011	WS-42524	
PD-8772311	WS-42618	
PD-877358	WS-42725	7

WS-42732 .	71
WS-43613 .	133
	110
WS-44512 .	110
WS-44522 .	110
WS-45620 .	134
	137
	131
	130
	84
	84
	85
	85
	94
	94 69
	69
	69
	77
	75
WS-77624 .	75
WS-77636 .	75
WS-79622 .	87
WS-79636 .	87
WS-87618 .	136
	73
	73
WS-W5312	167
	167
WS-W5720	173
WS-W5812	176
WS-W5817 WS-W5822	176
WS-W3913	
WS-W15700	
WS-W13714	
WS-W17726	
WS-W20709	
WS-W23610)169
WS-W23614	ł169
WS-W24509	9164
WS-W24513	
WS-W26712	2163
WS-W26716	
WS-W29718	
WS-W29724	
WS-W32712	
WS-W32714 WS-W34712	
WS-W34714 WS-W36610	
WS-W36614	
WS-W37612	
WS-W37617	
WS-W38710)158
WS-W38714	ł158
WS-W41716	5166
WS-W41722	2166
WS-W43709	
WS-W43712	
WS-W43715	
WS-W45714	
WS-W45720	
WS-W48612	
WS-W48616	
WS-W48620 WS-W48709	
WS-W48709	
WS-W50607	

WS-W50611	 59, 170
WS-W52610	 171
WS-W52614	 171
WS-W52620	 171
WS-W53610	 160
WS-W53614	 160
WS-W54614	 161
WS-W65607	154

Alphabetical Index

Α		ı	S	
ABODE	150	ICON161	SLICE	52
			SODOR	
ASHTON		ILLUSION22		
ASTORIA		INFINITI173	SOHO	
AVIATOR			SPA	
AXIS	59, 170		STEAMPUNK	
		J	STELLA	138
			STRETCH	145
В		JANUS176	STRIP	76
			SVELTE	108
BLISS	86			
BLOK	120	K		
BRIC	118		Т	
BRINK	74	KISS35		
BRISTOL	62, 98	KUBE110	TAO	167
			THEORY	70
			TURBO	122
С		L		
CALIBER	177	LACED139	U	
CHAMBER		LATITUDE171	•	
CHICAGO		LEVEL20, 66	UNO	172
CLIFFHANGER		LINE21, 80, 124	0110	
COCO		LINK		
COMPASS		LOLLI33		
CORBUSIER		LOLLI33	V	
			V	
CORSO	12		\/ANHT\/	2.4
		М	VANITY	
_			VERTIGO	
D		MALLOW36	VERVE	
		MANHATTAN 40, 61,142	VIDA	
	27	MERIDIEN56, 84	VIE	
DELANO		MESH162	VISTA	
DICE	54, 90	MOD154	VOLO	15
DUNHILL	102	MODERNE 132	VORNADO	8 , 11
DYNAMO	28	MYTHICAL116, 117		
-		N	Z	
E		N	7F A L OLLIC	160
F MC2		NECT 162	ZEALOUS	160
E=MC2		NEST163		
ELEKTRON		NIVEOUS39, 58		
ELEMENTUM				
ELLIPTIC				
EMPIRE	135	0		
		OBERON151		
F		OVER-UNDER155		
FLAIR	30			
FLIP	144	P		
FLOAT	121			
FOLSOM	169	PALAIS130		
FUNNEL	152	PANORAMA175		
FUSE	72	PILLAR92		
		PLANETS46		
		PROHIBITION134		
G				
GAIA	157	R		
	50			
		REFLECTION68		
		RONDELLE96		
н		ROCKET32		
		NOCKET32		
HAVANA	121			
HORIZON	94 158			
DURKIL AINE	158			

Headquarters

Tel: 800.526.2588 Fax: 800.526.2585

East Coast Factory

44 Harbor Park Dr Port Washington, NY 11050

Central Factory

1600 Distribution Ct, Lithia Springs, GA 30122

West Coast Factory

1750 Archibald Ave Ontario, CA 91761

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program.

Copyright 2017

