INSTALLATION INSTRUCTION

Tube Architectural Color Tunable - Wall Mount

DS-WS05-CC, DS-WD05-CC



REFLECTOR REPLACEMENT

- 1. Remove panel assembly by loosening the fixture screw and gasket, remove three clips to change reflector. (FIG.12)
- 2. Replace your reflector on panel and fix the clips. (FIG.13)

FIG.12





FIG.13



Put on reflector and fix clips

INSTALLATION INSTRUCTION

Tube Architectural Color Tunable - Wall Mount


DS-WS05-CC, DS-WD05-CC




Responsible Lighting®

WIRING DIAGRAMS

SINGLE FIXTURE WIRING



MULTIPLE FIXTURE WIRING

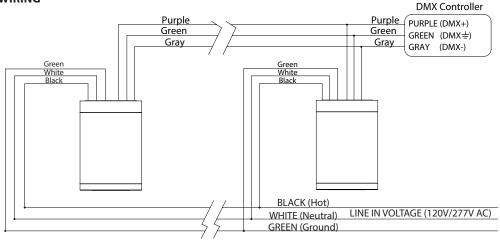

SINGLE FIXTURE (INTERNAL WIRING) - FOR LED MODULE REPLACEMENT

Fixture Wall Cover **DMX Controller Purple** Green PURPLE (DMX+) Brown Green GREEN (DMX±) Orange Gray GRAY (DMX-) Black Hot LINE IN VOLTAGE DC POWER SUPPLY (120V/277V AC) CTM One Neutral White INSIDE FIXTURE Red Black

CTM MODULE WIRING CHART

LEAD COLOR	INPUT	
Red	24V Positive	
Black	24V Negative	
Green	DMX+	
Orange	DMX-	
Brown	DMX±	

waclighting.com Phone (800) 526.2588 Fax (800) 526.2585 Headquarters/Eastern Distribution Center 44 Harbor Park Drive Port Washington, NY 11050 Central Distribution Center 1600 Distribution Ct Lithia Springs, GA 30122 **Western Distribution Center** 1750 Archibald Avenue Ontario, CA 91760