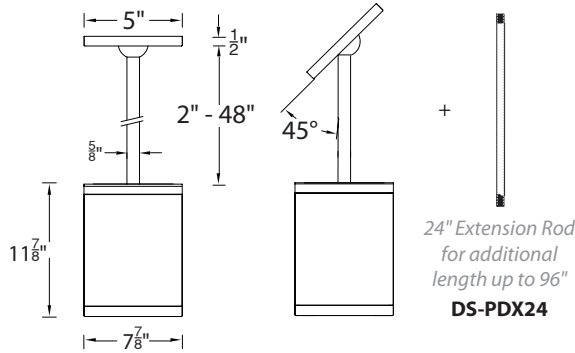


TUBE ARCHITECTURAL DS-PD08

WAC LIGHTING

LED Pendant Mounts



Seismic swivel tilts up to 45° to accommodate sloped ceiling

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cylindrical profile delivers accent and wall wash lighting. Comes in various light distribution and beam angle options.

FEATURES

- High performance exterior rated LED pendant
- Includes 45° swivel canopy and 2 field cuttable 24" rods
- Solid aluminum construction
- 5 year warranty

SPECIFICATIONS

- Input:** Universal voltage 120V - 277VAC, 50/60Hz
- Dimming:** Electronic low voltage (ELV) : 100% - 5%
0-10V: 100% - 1%
- Light Source:** High output 3 Step Mac Adam Ellipse COB
Rated life of 60,000 hours at L70
- Finish:** Electrostatically powder coated, white, black, bronze and graphite
- Standards:** IP65 rated, ETL & cETL wet location listed, Energy Star® 2.2 rated Title 24 JA8-2016 Compliant
- Operating Temp:** -13°F to 122°F (-25°C to 50°C)

ORDERING NUMBER

Diameter	Watt	Beam	Beam Angle	Color Temp	CRI	Reference Output ¹ Lumen	CBCP	Efficacy (Lm/W)	Light Distribution	Finish			
DS-PD08	8" 46W	S Spot	18°	927	2700K	90	3080	15187	67		BK Black WT White BZ Bronze GH Graphite		
				27	2700K	85	3865	19064	84				
				930	3000K	90	3275	16156	71				
				30	3000K	85	3935	19387	86				
				35	3500K	85	4030	19872	88				
				40	4000K	85	4095	20195	89				
		DS-PD0834	8" 34W	N Narrow	25°	927	2700K	90	3185	10536		68	
						27	2700K	85	4000	13226		87	
						930	3000K	90	3390	11208		74	
						30	3000K	85	4070	13450		88	
						35	3500K	85	4170	13786		91	
						40	4000K	85	4240	14010		92	
		DS-PD0834	8" 34W	F Flood	35°	927	2700K	90	3015	5475		66	
						27	2700K	85	3785	7211		82	
						930	3000K	90	3210	6111		70	
30	3000K					85	3850	7334	84				
35	3500K					85	3945	7517	86				
40	4000K					85	4010	7639	87				

DS-PD08-_____ - _____ ¹Reference output shows 46W output. Multiply by 0.8 to determine output for 34W combinations.

Example: DS-PD08-S930-WT

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760



TUBE ARCHITECTURAL DS-PD08

LED Pendant Mounts

WAC LIGHTING

Responsible Lighting®

MOUNTING ACCESSORIES

	<i>Extension Rod</i>	DS-PDX24	<i>One 24" extension rod for DS-PDSK Can be field cut</i>	Finish	
				BK <i>Black</i>	
				WT <i>White</i>	
				BZ <i>Bronze</i>	
				GH <i>Graphite</i>	

Example: **DS-PDX24-WT**

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760