dweLED

Fixture Type:

Catalog Number:

Project:

Location:

Niveous

Ceiling And Wall Mount 3000K

Model & Size	*Color Temp & CRI*	*Watt*	*LED Lumens*	*Delivered Lumens*	*Finish*
❍ FM-W52306 6"	3000K 90	9.5W	800	680	❍ WT White

Example: **FM-W52306-WT**

- For 277V special order, add an "F" before the finish: FM-W52309F-WT
- For alternate color temperature, special order adding -27 or -35: FM-W52309F-35-WT

DESCRIPTION

Like the perfect snowball, unique yet wholly recognizable.

FEATURES

- Spheres of pure light
- Mouth blown etched opal glass diffuser provides even illumination
- No transformer or driver required except 277V option (special order).
- 2700K /3500K for 6” and 9” options only (special order)
- ACLED driverless technology
- 5 Year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10%
Rated Life:	45000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL, IP65, Title 24: 2019
	Wet Location Listed
Construction:	Aluminum hardware with opal glass diffuser

REPLACEMENT PARTS

RPL-GLA-52306 - Glass for FM-W52306

FINISHES

White

LINE DRAWING



WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. May 2020

dweLED

Fixture Type:

Catalog Number:

Project:

Location:

Niveous

Ceiling And Wall Mount 3000K

Model & Size	*Color Temp & CRI*	*Watt*	*LED Lumens*	*Delivered Lumens*	*Finish*
❍ FM-W52309 9"	3000K 90	18W	1600	1428	❍ WT White

Example: **FM-W52309-WT**

- For 277V special order, add an "F" before the finish: FM-W52309F-WT
- For alternate color temperature, special order adding -27 or -35: FM-W52309F-35-WT

DESCRIPTION

Like the perfect snowball, unique yet wholly recognizable.

FEATURES

- Spheres of pure light
- Mouth blown etched opal glass diffuser provides even illumination
- No transformer or driver required except 277V option (special order).
- 2700K /3500K for 6" and 9" options only (special order)
- ACLED driverless technology
- 5 Year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10%
Rated Life:	45000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL, IP65, Title 24: 2019
	Wet Location Listed
Construction:	Aluminum hardware with opal glass diffuser

REPLACEMENT PARTS

RPL-GLA-52309 - Glass for FM-W52309

FINISHES

White

LINE DRAWING



WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. May 2020

dweLED

Fixture Type:

Catalog Number:

Project:

Location:

Niveous

Ceiling And Wall Mount 3000K

Model & Size	*Color Temp & CRI*	*Watt*	*LED Lumens*	*Delivered Lumens*	*Finish*
❍ FM-W52312 12"	3000K 90	24W	2229	1900	❍ WT White

Example: **FM-W52312-WT**

- For 277V special order, add an "F" before the finish: FM-W52309F-WT
- For alternate color temperature, special order adding -27 or -35: FM-W52309F-35-WT

DESCRIPTION

Like the perfect snowball, unique yet wholly recognizable.

FEATURES

- Spheres of pure light
- Mouth blown etched opal glass diffuser provides even illumination
- No transformer or driver required except 277V option (special order).
- 2700K /3500K for 6" and 9" options only (special order)
- ACLED driverless technology
- 5 Year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10%
Rated Life:	45000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL, IP65, Title 24: 2019
	Wet Location Listed
Construction:	Aluminum hardware with opal glass diffuser

REPLACEMENT PARTS

RPL-GLA-52312 - Glass for FM-W52312

FINISHES

White

LINE DRAWING

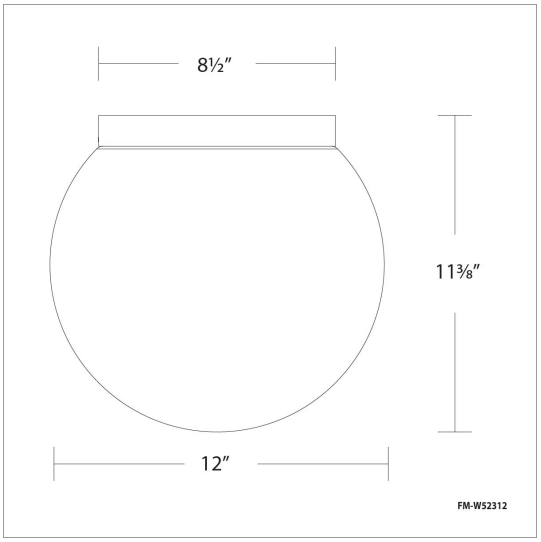

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. May 2020