

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Reed Swing Arm 3000K

Model & Size	Color Temp & CRI	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
PL-11017 17"	3000K 90	14W	120-277 VAC	569	380	BK Black BN Brushed Nickel

Example: **PL-11017-BK**

DESCRIPTION

The perfect complement to any display piece. Conserves fine art while providing superior color rendering.

FEATURES


- Light source can be articulated
- Simple, elegant slim profile design
- Driver conceals within the canopy
- Conversion plate for 4" J box included.
- 5 Year warranty

SPECIFICATIONS


Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10%, 0-10V: 100-5%, TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum hardware with acrylic diffuser



FINISHES



LINE DRAWING

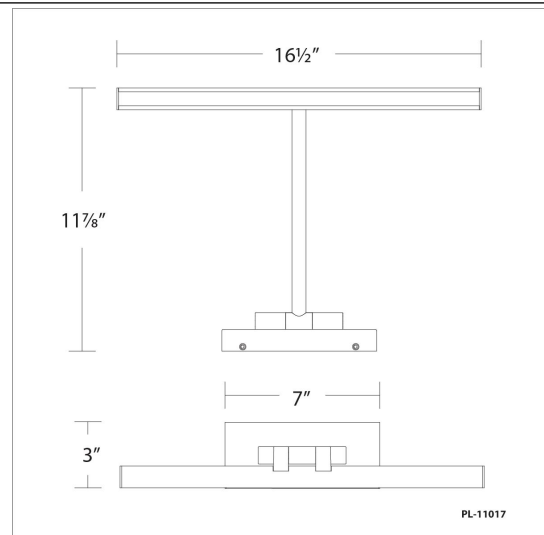

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Reed Swing Arm 3000K

Model & Size	Color Temp & CRI	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
PL-11025 25"	3000K 90	17W	120-277 VAC	825	544	BK Black BN Brushed Nickel

Example: **PL-11025-BK**

DESCRIPTION

The perfect complement to any display piece. Conserves fine art while providing superior color rendering.

FEATURES


- Light source can be articulated
- Simple, elegant slim profile design
- Driver conceals within the canopy
- Conversion plate for 4" J box included.
- 5 Year warranty

SPECIFICATIONS


Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10%, 0-10V: 100-5%, TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum hardware with acrylic diffuser



FINISHES



LINE DRAWING

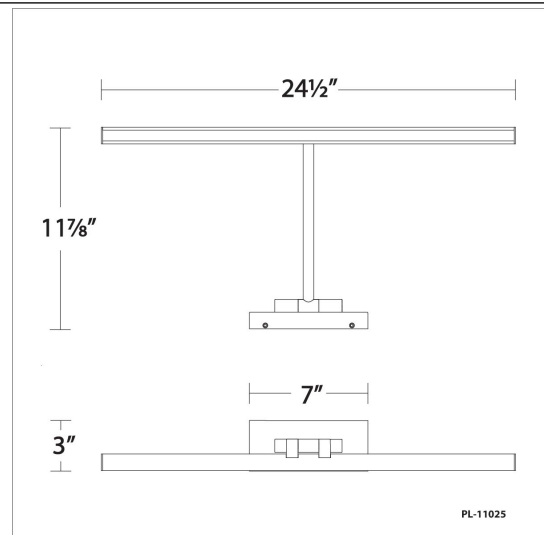

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Reed Swing Arm 3000K

Model & Size	Color Temp & CRI	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
PL-11033 33"	3000K 90	25W	120-277 VAC	1072	747	BK Black BN Brushed Nickel

Example: **PL-11033-BK**

DESCRIPTION

The perfect complement to any display piece. Conserves fine art while providing superior color rendering.

FEATURES


- Light source can be articulated
- Simple, elegant slim profile design
- Driver conceals within the canopy
- Conversion plate for 4" J box included.
- 5 Year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100-10%, 0-10V: 100-5%, TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum hardware with acrylic diffuser



FINISHES



Black Brushed Nickel

LINE DRAWING

