

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Oculux 3.5" Downlight Square

| Model | Beam  | Color Temp & CRI | Lumens | CBCP | Finish   |
|-------|-------|------------------|--------|------|--|
| R3BSD | F 50° | 927 2700K - 90   | 850    | 1240 | BN Brushed Nickel<br>HZWT Haze/White<br>WT White |
|       |       | 930 3000K - 90   | 915    | 1333 |  |
|       | N 25° | 927 2700K - 90   | 860    | 2485 |  |
|       |       | 930 3000K - 90   | 925    | 2671 |  |
|       | S 15° | 927 2700K - 90   | 865    | 4382 |  |
|       |       | 930 3000K - 90   | 930    | 4710 |  |

Example: **R3BSD-F927-BN**

### DESCRIPTION

Oculux 3.5" is an architectural grade recessed downlight available in an IC-Rated Airtight new construction or IC-Rated remodel housing sold separately. Oculux is Energy Star Rated and CEC Title 24 Compliant with Wet Location listing which means it can be installed in a broad range of applications. 35° visual cutoff provides superb glare reduction. Available in round or square open reflector and adjustable trim options.

### FEATURES

- Shallow housing under 4in depth
- Single spot light source
- 5 year warranty

### SPECIFICATIONS


|                        |  |
|------------------------|--|
| <b>Construction:</b>   | Die-cast aluminum trim and heat sink   |
| <b>Power:</b>          | 11W  |
| <b>Light Source:</b>   | Integrated LED<br>3 Step Mac Adam Ellipse                                    |
| <b>Rated Life:</b>     | 50000 Hours  |
| <b>Mounting:</b>       | Heavy gauge retention clips support trim firmly                              |
| <b>Finish:</b>         | Enamel Coated Brushed Nickel, Enamel Coated Haze/White, Electroplated White  |
| <b>Operating Temp:</b> | -4°F to 104°F (-20°C to 40°C)  |
| <b>Standards:</b>      | ETL, cETL, Wet Location Listed, Energy Star 2.0, Title 24 JA8-2016 Compliant |



### FINISHES



### LINE DRAWING

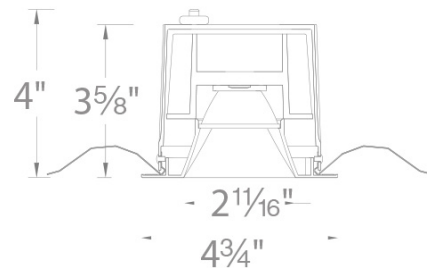

## Oculux 3.5" Remodel Housing

### Model & Product

R3BBRT-10 Oculux 3.5" LED Remodel IC-Rated Housing

Example: **R3BBRT-10**

### DESCRIPTION

Oculux 3.5" is an architectural grade recessed downlight available in an IC-Rated Airtight new construction or IC-Rated remodel housing sold separately. Oculux is Energy Star Rated and CEC Title 24 Compliant with Wet Location listing which means it can be installed in a broad range of applications. 35° visual cutoff provides superb glare reduction. Available in round or square open reflector and adjustable trim options.

### FEATURES


- Shallow housing under 4in depth
- Driver concealed within the fixture
- 5 year warranty

### SPECIFICATIONS

|                           |   |
|---------------------------|---|
| <b>Construction:</b>      | 20 gauge cold rolled steel wiring box                         |
| <b>Power:</b>             | 11W   |
| <b>Input:</b>             | 120 VAC, 50/60Hz  |
| <b>Dimming:</b>           | TRIAC: 100-5%, ELV: 100-5%, 0-10V: 100-5%                     |
| <b>Rated Life:</b>        | 50000 Hours   |
| <b>Mounting:</b>          | Heavy gauge retention clips secures housing firmly to ceiling |
| <b>Cut Out:</b>           | 4 1/4"  |
| <b>Finish:</b>            |   |
| <b>Ceiling Thickness:</b> | 1/2" - 1"   |
| <b>Operating Temp:</b>    | -4°F to 104°F (-20°C to 40°C)                                 |
| <b>Standards:</b>         | ETL, cETL, IC, Airtight                                       |



### LINE DRAWING

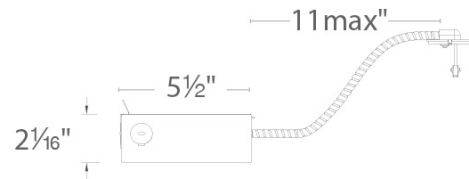

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Oculux 3.5" New Construction Housing

### Model

R3BNICA-10 Oculux 3.5" LED  
New Construction IC-Rated Airtight  
Housing (120V)  
R3BNICA-10U-EM Oculux 3.5"  
LED New Construction IC-Rated  
Airtight Housing (120-277V)  
R3BNICA-10U Oculux 3.5" LED  
New Construction IC-Rated Airtight  
Housing (120-277V)

### DESCRIPTION


Oculux 3.5" is a structural grade recessed downlight available in an IC-Rated Airtight new construction or IC-Rated remodel housing sold separately. Oculux is Energy Star Rated and CEC Title 24 Compliant with Wet Location listing which means it can be installed in a broad range of applications. 35° visual cutoff provides superb glare reduction. Available in round or square open reflector and adjustable trim options.

### FEATURES

- Shallow housing under 4in depth
- Driver concealed within the fixture
- 5 year warranty

### SPECIFICATIONS

|                    |   |
|--------------------|---|
| Construction:      | 20 gauge cold rolled steel wiring box                         |
| Power:             | 11W   |
| Input:             | 120 VAC, 120-277 VAC, 50/60Hz                                 |
| Dimming:           | TRIAC: 100-5%, ELV: 100-5%, 0-10V: 100-5%                     |
| Rated Life:        | 50000 Hours   |
| Mounting:          | Heavy gauge retention clips secures housing firmly to ceiling |
| Cut Out:           | 4 1/4"  |
| Finish:            |   |
| Ceiling Thickness: | 1/2" - 1"   |
| Operating Temp:    | -4°F to 104°F (-20°C to 40°C)                                 |
| Standards:         | ETL, cETL, IC, Airtight                                       |

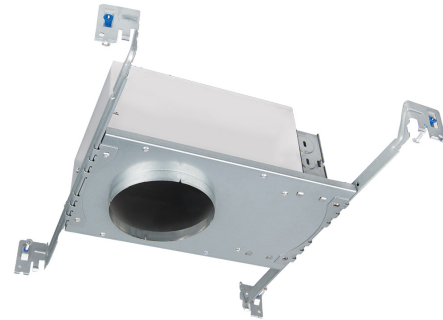

### LINE DRAWING

