

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Line Bathroom Sconce

Model & Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
WS-6718 18"	2700K 90	16.5W	1004	770	AL Brushed Aluminum
	3000K 90	16.5W	1109	850	BK Black

Example: **WS-6718-27-AL**

- For 277V special order, add an "F" before the finish: WS-6718F-27-AL

### DESCRIPTION


Uber-thin edge-lit LED panels provide a downward task light free of any hot spots as well as an upward ambient illumination. Even better, the design can be rotated around to provide direct or indirect illumination as the needs arise when installed in a bath.

### FEATURES


- Vertical or horizontal mount with 330° adjustment
- Super thin, 5/8" edge-lit LED panel
- Transformer installed within the Junction Box, transformer dimension: 2.00" x 1.38" x 1.02"
- 5 year warranty

### SPECIFICATIONS

<b>Color Temp:</b>	2700K, 3000K
<b>Input:</b>	120 VAC, 50/60Hz
<b>CRI:</b>	90
<b>Dimming:</b>	ELV: 100 - 10%
<b>Rated Life:</b>	80000 Hours
<b>Mounting:</b>	Can be mounted on ceiling or wall in all orientations
<b>Standards:</b>	ETL, cETL Damp Location Listed
<b>Construction:</b>	Aluminum hardware with ultra-thin light-guide acrylic diffuser

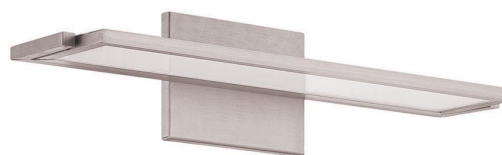


### FINISHES



Black      Brushed Aluminum

**LINE DRAWING**



**WS-6718**

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Line Bathroom Sconce

Model & Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
WS-6724 24"	2700K 90	22W	1339	1035	AL Brushed Aluminum
	3000K 90	22W	1478	1140	BK Black

Example: **WS-6724-27-AL**

- For 277V special order, add an "F" before the finish: WS-6718F-27-AL

### DESCRIPTION

Uber-thin edge-lit LED panels provide a downward task light free of any hot spots as well as an upward ambient illumination. Even better, the design can be rotated around to provide direct or indirect illumination as the needs arise when installed in a bath.

### FEATURES


- Vertical or horizontal mount with 330° adjustment
- Super thin, 5/8" edge-lit LED panel
- Transformer installed within the Junction Box, transformer dimension: 2.00" x 1.38" x 1.02"
- 5 year warranty

### SPECIFICATIONS

<b>Color Temp:</b>	2700K, 3000K
<b>Input:</b>	120 VAC, 50/60Hz
<b>CRI:</b>	90
<b>Dimming:</b>	ELV: 100 - 10%
<b>Rated Life:</b>	80000 Hours
<b>Mounting:</b>	Can be mounted on ceiling or wall in all orientations
<b>Standards:</b>	ETL, cETL Damp Location Listed
<b>Construction:</b>	Aluminum hardware with ultra-thin light-guide acrylic diffuser



### FINISHES



### LINE DRAWING



**WS-6724**

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

## Line Bathroom Sconce

Model & Size	Color Temp & CRI	Watt	LED Lumens	Delivered Lumens	Finish
WS-6736 36"	2700K 90	29W	2009	1380	AL Brushed Aluminum
	3000K 90	29W	2218	1520	BK Black

Example: **WS-6736-27-AL**

- For 277V special order, add an "F" before the finish: WS-6718F-27-AL

### DESCRIPTION

Uber-thin edge-lit LED panels provide a downward task light free of any hot spots as well as an upward ambient illumination. Even better, the design can be rotated around to provide direct or indirect illumination as the needs arise when installed in a bath.

### FEATURES


- Vertical or horizontal mount with 330° adjustment
- Super thin, 5/8" edge-lit LED panel
- Transformer installed within the Junction Box, transformer dimension: 2.00" x 1.38" x 1.02"
- 5 year warranty

### SPECIFICATIONS

<b>Color Temp:</b>	2700K, 3000K
<b>Input:</b>	120 VAC, 50/60Hz
<b>CRI:</b>	90
<b>Dimming:</b>	ELV: 100 - 10%
<b>Rated Life:</b>	80000 Hours
<b>Mounting:</b>	Can be mounted on ceiling or wall in all orientations
<b>Standards:</b>	ETL, cETL Damp Location Listed
<b>Construction:</b>	Aluminum hardware with ultra-thin light-guide acrylic diffuser



### FINISHES



### LINE DRAWING



**WS-6736**