


GALILEO – model: LED610

LEDme® Track Luminaire

WAC LIGHTING

Responsible Lighting®

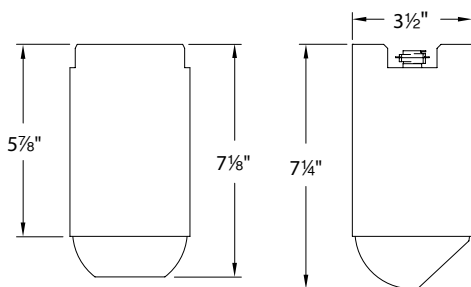

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Innovative engineering integrates form and function with state-of-the-art LED technology. Simplicity and attention to detail allow for a 360° aiming rotation without altering the profile, maintaining clean form without interruption to the visual line.

For use with WAC Lighting's 120V Track system and compatible with other manufacturer's track (consult factory for specific brands).

FEATURES

- Meets 2013 California Title 24 Efficiency
- Smooth and continuous ELV dimming
- ANSI Compliant Warm/Neutral LED Bins for a finer color consistency
- Replaceable LED module
- 60,000 hour rated life
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction: Extruded aluminum cover with die-cast aluminum head and clear lens.

Driver: Input voltage: 120VAC/60Hz; High power factor >0.9
Max Load: 10W

Light Source: 10W Cree Multi-chip LED.
Total power consumption of 14W with included driver.

Dimming: May be dimmed to 8% with electronic low voltage (ELV) dimmer.

Finish: Powder coat paint finish, electroplated.
Available in Black (BK), Brushed Nickel (BN), and White (WT).

Standards: UL & CUL Listed. Meets Energy Star Requirements.

FIXTURE PERFORMANCE

Model #	Beam	Color Temp	Watts	Lumens	Efficacy	CBCP	CRI
LED610S-927	20°	2700K	14.5W	675	47 Lm/W	3422	90
LED610F-927	32°	2700K	14.5W	660	46 Lm/W	1596	90
LED610S-27	20°	2700K	14.5W	845	58 Lm/W	4206	80
LED610F-27	32°	2700K	14.5W	775	53 Lm/W	1800	80
LED610S-9W	20°	3000K	14.5W	700	48 Lm/W	3426	90
LED610F-9W	32°	3000K	14.5W	680	47 Lm/W	1649	90
LED610S-WW	20°	3000K	14.5W	915	63 Lm/W	4532	80
LED610F-WW	32°	3000K	14.5W	865	60 Lm/W	1964	80
LED610S-35	20°	3500K	14.5W	930	64 Lm/W	4679	80
LED610F-35	32°	3500K	14.5W	920	63 Lm/W	2158	80
LED610S-CW	20°	4000K	14.5W	910	63 Lm/W	4577	80
LED610F-CW	32°	4000K	14.5W	845	58 Lm/W	1929	80

ORDER NUMBER

System	Model #	Beam Spread	Color Temp	Finish
L L Track H H Track J J Track	LED610	S 20° F 32°	927 2700K (90 CRI) 27 2700K 9W 3000K (90 CRI) WW 3000K 35 3500K CW 4000K	BK Black BN Brushed Nickel WT White

REPLACEMENT MODULE

BXRC-27G1000	2700K (90 CRI)
BXRC-27E1000	2700K
BXRC-30G1000	3000K (90 CRI)
BXRC-30E1000	3000K
BXRC-35E1000	3500K
BXRC-40E1000	4000K

- **LED610** - -

Example: L-LED610S-WW-BK

INTERCHANGEABLE BEAM REFLECTORS

RF-S	20°
RF-F	40°

WAC Lighting

www.waclighting.com

Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050

Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760

Phone (800) 526.2588 • Fax (800) 526.2585


GALILEO – model: LED610S

Photometrics


WAC LIGHTING

Responsible Lighting®


20° Beam Angle - 2700K (85 CRI)

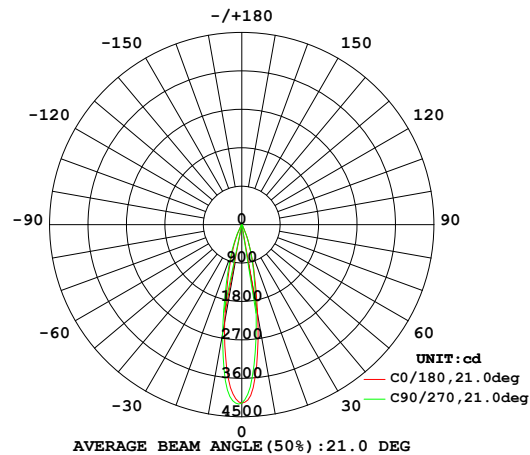


20° Beam Angle - 3000K (85 CRI)

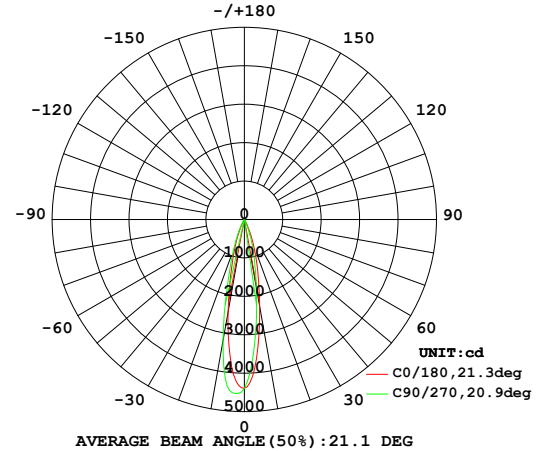


20° Beam Angle - 2700K (90 CRI)

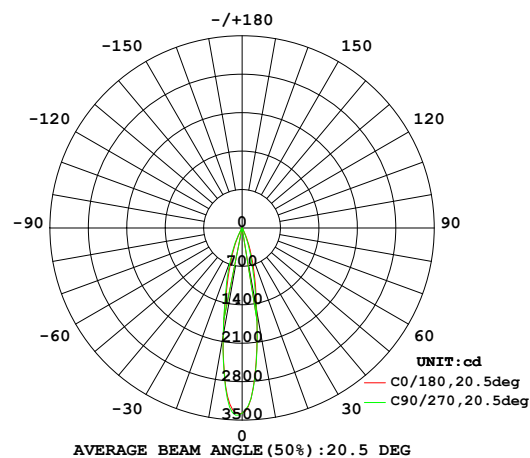


20° Beam Angle - 3000K (90 CRI)

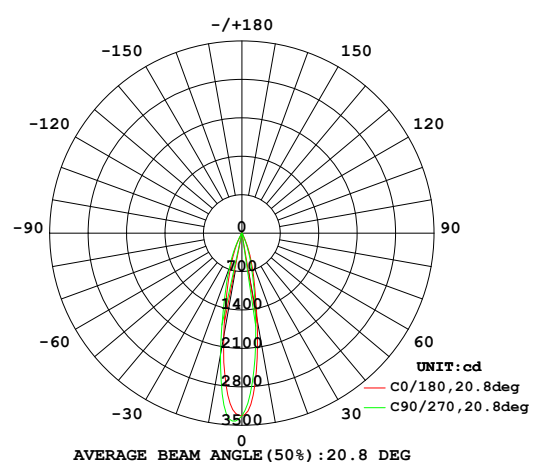

20° Beam Angle - 3500K

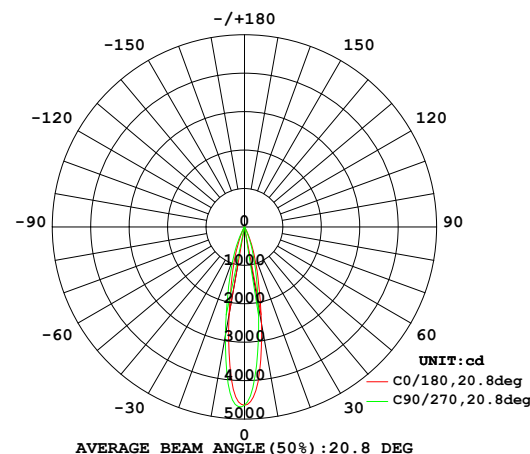

20° Beam Angle - 4500K

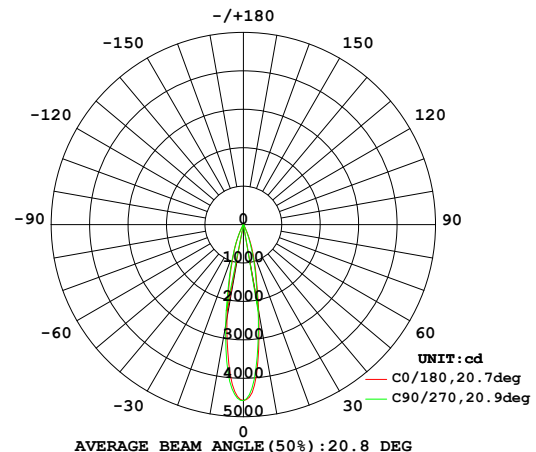

WAC Lighting

www.waclighting.com

Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050

Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760

Phone (800) 526.2588 • Fax (800) 526.2585


GALILEO – model: LED610F

Photometrics


WAC LIGHTING

Responsible Lighting®


32° Beam Angle - 2700K (85 CRI)

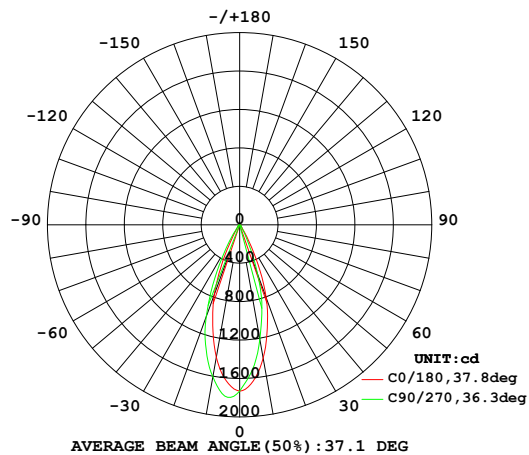


32° Beam Angle - 3000K (85 CRI)

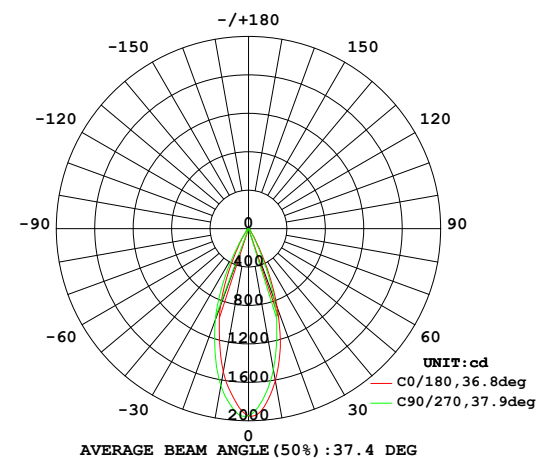


32° Beam Angle - 2700K (90 CRI)

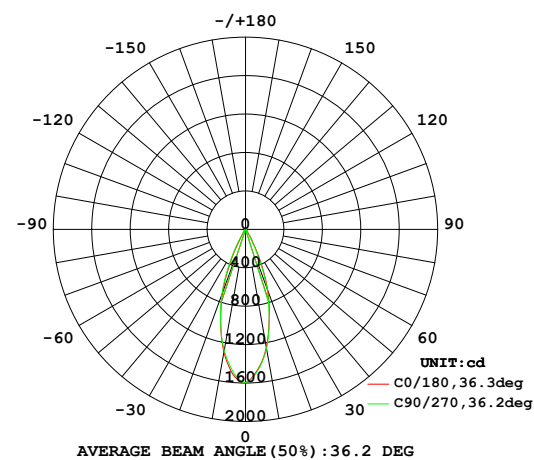


32° Beam Angle - 3000K (90 CRI)

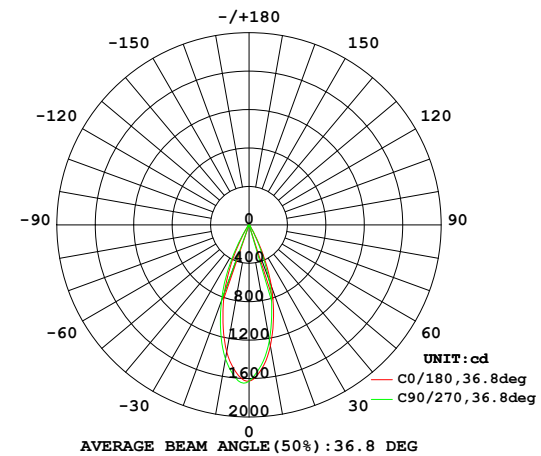

32° Beam Angle - 3500K

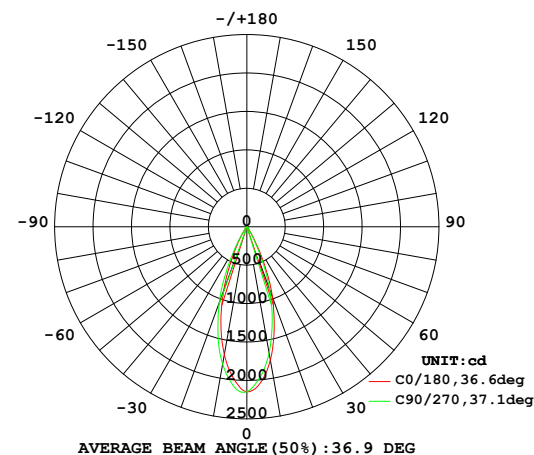

32° Beam Angle - 4500K

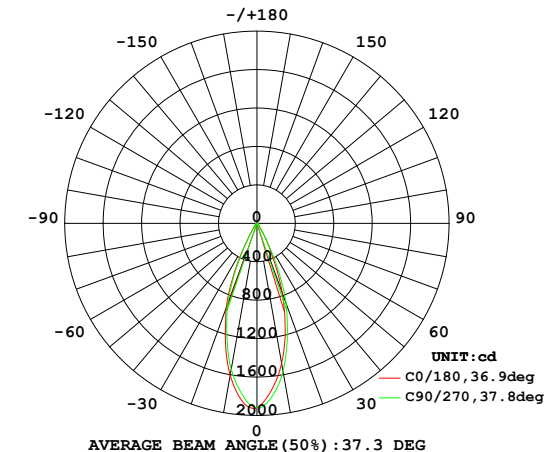

WAC Lighting

www.waclighting.com

Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050

Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760

Phone (800) 526.2588 • Fax (800) 526.2585