

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Radius

56" Pendant 3000K

Model & Size	Color Temp & CRI	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
PD-27802 2 Light	3000K 90	58W	120-277 VAC	6444	5220	AL Brushed Aluminum BK Black

Example: **PD-27802-AL**

DESCRIPTION

Long graceful stems of aluminum and light create a beautiful display that is both functional and modern art. With versatile hanging options, Radius lets you put a personal touch on any room. Choose two or three stems in brushed aluminum or brushed black.

FEATURES


- Thin color matched powered aircraft cables and hardware
- Multiple hanging options for personalized creative display
- Can be mounted on a sloped ceiling
- Driver concealed within the canopy
- 5 year warranty

SPECIFICATIONS


Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%, 0-10V: 100 - 5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips support trim firmly. Safety cabling standard.
Standards:	ETL, cETL, Title 24 JA8-2016 Compliant Damp Location Listed
Construction:	Aluminum body; acrylic diffuser is extruded and curved



FINISHES



LINE DRAWING



Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Radius

56" Pendant 3000K

Model & Size	Color Temp & CRI	Watt	Voltage	LED Lumens	Delivered Lumens	Finish
PD-27803 3 Light	3000K 90	86W	120-277 VAC	9767	7912	AL Brushed Aluminum BK Black

Example: **PD-27803-AL**

DESCRIPTION


Long graceful stems of aluminum and light create a beautiful display that is both functional and modern art. With versatile hanging options, Radius lets you put a personal touch on any room. Choose two or three stems in brushed aluminum or brushed black.

FEATURES

- Thin color matched powered aircraft cables and hardware
- Multiple hanging options for personalized creative display
- Can be mounted on a sloped ceiling
- Driver concealed within the canopy
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120-277 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 10%, 0-10V: 100 - 5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips support trim firmly. Safety cabling standard.
Standards:	ETL, cETL, Title 24 JA8-2016 Compliant Damp Location Listed
Construction:	Aluminum body; acrylic diffuser is extruded and curved

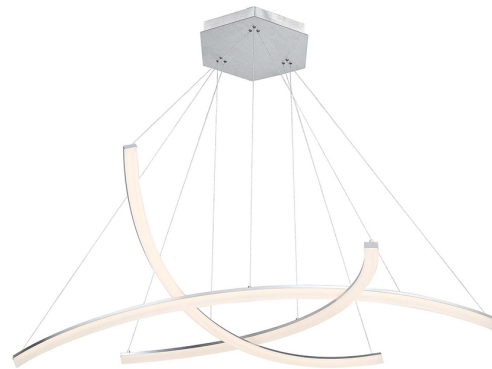

FINISHES



LINE DRAWING

