

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Lotos Adjustable Downlight 5CCT

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R4ERAR	W 45°	9CS 2700K/3000K/3500K /4000K/5000K - 90	800	1020	WT White
R6ERAR		9CS 2700K/3000K/3500K /4000K/5000K - 90	1340	1896	

FEATURES

- 5-CCT Switchable, adjustable 2700K and 5000K Example: R4ERAR-9CS-W
- Multiple LED array for uniform illumination
- Rotatable multi-axis gimbal ring
- Driver included
- 5 year warranty

SPECIFICATIONS

Construction:	Steel with frosted TIR lens
Power:	9W, 15W
Input:	120 -277 VAC, 50/60Hz
Dimming:	TRIAC: 100-5%, ELV: 100-5%
Light Source:	Integrated LED
Lens:	Translucent acrylic diffuser
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips secures fixture to ceiling
Cut Out:	4 1/4", 5"
Finish:	Electrostatically powder coated White
Ceiling Thickness:	1/2" - 1"
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, Wet Location Listed, Energy Star 2.0, Title 24 JA8-2016 Compliant, IC, Airtight




FINISHES



White

LINE DRAWING

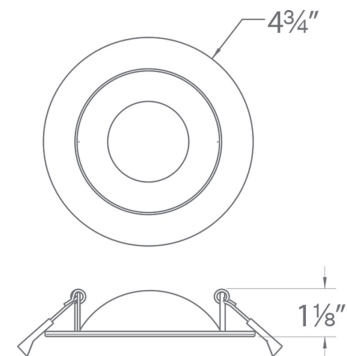

R4ERAR