

INSTALLATION INSTRUCTIONS FOR FIXTURE #3002MP-BN.#3002-VBRS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (FIG. 1)

Warning:

Read instructions carefully. If you are unclear as to how to proceed, consult a qualified electrician. NOTE: Proper wiring is essential for the safe operation of this fixture.

1. Shut off the power supply at the fuse box or circuit breaker. If necessary, remove the old fixture from ceiling including the mounting hardware.
2. Carefully remove the new fixture from the packaging and check that all parts are included as shown in the installation.
3. Carefully unpack fixture and all components.
4. Determine the desired hanging height and fasten the tubes (H) for each other by the nipple (I) onto the fixture body. Pass the wires carefully through inside of each stem as you assemble.
5. Carefully pull wires through the stems into canopy (D) as shown in Figure 1.
6. Note: There are generally 3 pcs 12" stems (H) and 1 pc 6" stem (H) and 1 pc 3" stem (H) included..
7. Place the glass plate(F) between the steel plates (K) and fasten it with lock ball (M) tightly. Repeat this process to install the other 3 sides of glass plates.
8. Install the bulbs in accordance with the fixture's specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**

MOUNTING THE FIXTURE (Fig. 1)

9. Attach the mounting bar (A) to the outlet box and fastened by 2 outlet box screws (C). The side of the cross bar marked "GND" must face out.
10. Attach the fixture body with canopy (D) onto the mounting bar (A) by protruding 2 mounting screws (B) through the mounting holes of the canopy (D) and secure for each other by 2 ball nuts (E).

CONNECTING THE WIRES (Fig. 2)

1. At this point, connect the electrical wires as shown in figure 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the ground wire from the fixture to it. Otherwise, connect the fixture's ground wire directly to the cross bar using the green screw provided.
2. After wires are connected, tuck them carefully into the ceiling junction box.

Your installation is now complete. Return power to the outlet box and test the fixture.

Fig.1

Mounting plate

Ground Screw

Mounting Screw(2)

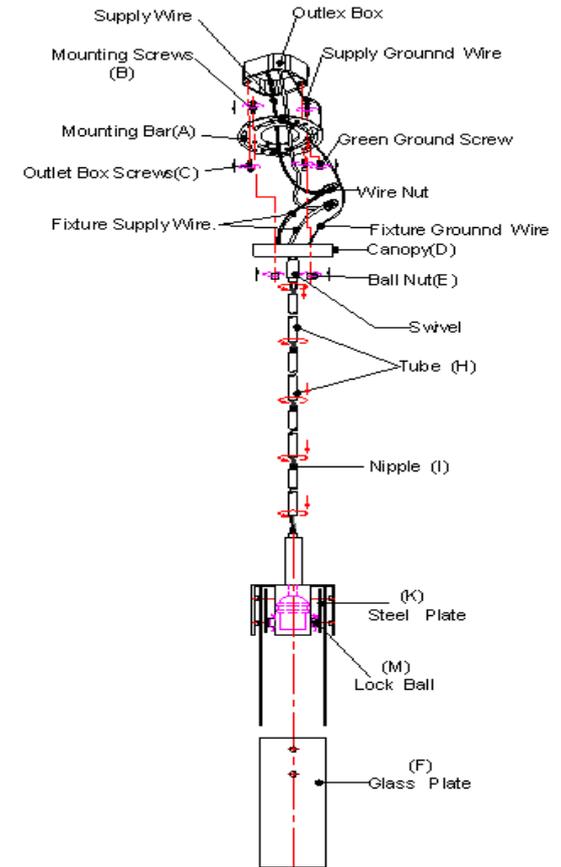


Fig .2

<p>FIXTURE WIRES Black or Smooth</p> 	<p>FIXTURE WIRES White or Ribbed</p> 	<p>FIXTURE WIRES Bare Copper (Ground)</p> 
<p>HOUSE WIRES Black (Hot)</p>	<p>HOUSE WIRES White (Neutral)</p>	<p>HOUSE WIRES Green (Ground)</p>

