



Family: Carlyle | Item No. 1131 MB



Drawing 1 - Fixture Assembly

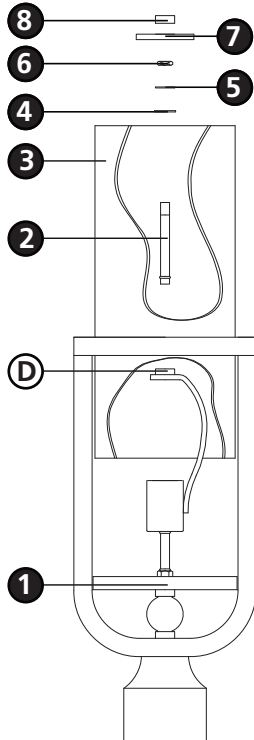

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first installing the fixture glass, making all necessary electrical connections, and then mounting fixture to pre-installed post.**

2

1. Prior to installing glass, fixture can now be lamped accordingly.
2. To install glass, thread stem (2) into the top of harp (D), located in the center of the main body assembly (1).
3. Slip glass (3) into main body assembly (1), making sure center stem (2) slips through center hole on top of glass (3).
4. Slip rubber washer (4) followed by metal washer (5) onto center stem (2).
5. Thread knurled nut (6) onto center stem (2) to secure glass.
6. Slip cap (7) onto center stem (2).
7. Thread knob (8) onto end of center stem (2) and hand-tighten.

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.


3

Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet (I.S. 18) and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to complete installation of this fixture.

4

1. After wiring connections are complete, slip post fitter (A) over top of pre-installed post (B) making sure all wire connections are tucked inside the pole - see **Drawing 2**.
2. When fixture is slipped over pole make sure no wires are being pinched between the top edge of the pole and the inside of the post fitter.
3. Thread the 3 set screws (C) into pre-tapped holes in post fitter.
4. Tighten screws (C) to secure fixture to post.

Drawing 2 - Fixture Mounting

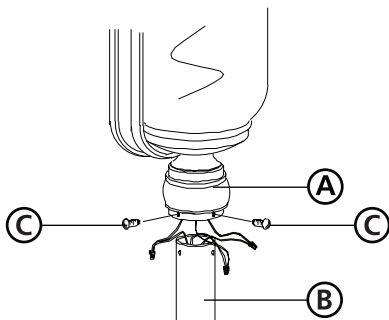

Note: Maximum wattage for 1131 fixture is 100 watts per bulb.

2.7.08