


# INSTALLATION INSTRUCTIONS

ITEM REFERENCE NUMBER: CHC 1443

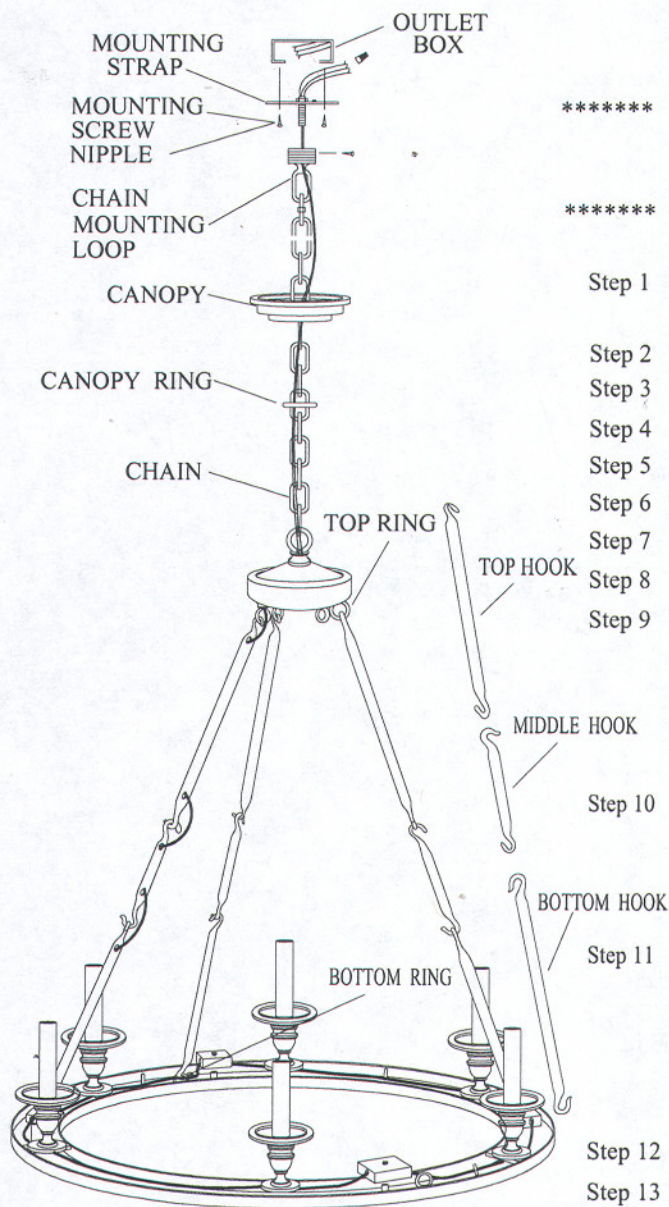

\*\*\*\*\* WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN

\*\*\*\*\* Tools required: chain pliers

- Step 1 Join top, middle and bottom hook together, attach top hook to top ring, bottom hook to bottom ring.
- Step 2 Attach chain to chain mounting loop.
- Step 3 Feed wire through chain and mounting loop.
- Step 4 Slide canopy on chain.
- Step 5 Attach mounting strap to mounting outlet box.
- Step 6 Insert thread nipple in mounting strap.
- Step 7 Attach chain mounting loop to thread nipple.
- Step 8 Attach chain with fixture to chain mounting loop at desired height
- Step 9 Attach the ground wire (silver or brass in color) from the fixture to the ground junction box wire (usually green or copper wire). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed. It is imperative that the outlet box in your home be properly grounded.
- Step 10 Connect the neutral wire from the fixture (ridges molded wire) to the neutral wire from the junction box (usually white). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Be sure no wire strands are exposed.
- Step 11 Connect the hot wire from the fixture (smooth wire) to the hot wire (usually black) from the junction box. Fasten each together with a plastic wire connector and wrap the connection with electrical tape. Be sure that no wire strands are exposed. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
- Step 12 Slip canopy to ceiling and secure with threaded canopy ring.
- Step 13 Place candle sleeve over socket.
- Step 14 Insert light bulbs Type CA, maximum 60 Watt into the sockets.