

# ASSEMBLING & INSTALLATION INSTRUCTIONS PRODUCT# 6161

## For Wall Mount Fixture

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .**

### MOUNTING THE FIXTURE

#### Installation (see fig.1)

1. Shut off the power at the circuit breaker and remove old fixture, including the single bar.
2. Thread the nipple part way into the center hole of the single bar and secure with hex nut.
3. Attach the single bar to the junction box using two junction box screws. The side of the single bar marked "GND" must face out.
4. Follow wiring instructions carefully (see fig.2).
5. Raise the pipe nipple with hex nut(C) to the bottom hole of the frame(A) and securely tighten, attach the glass(D) to end of the pipe nipple, screw it with plastic shim (F) and hex nut(G). Raise the cover(H) to end of the pipe nipple and lock it with ball nut(L). Attach the knob screw(E) to the frame(A), through the hole in the glass of side, then lock it with the knob screw.
6. Place the frame(A) over the pipe screw, then tighten it with the ball nut (B).
7. Install the light bulbs in accordance with the fixture's specifications. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**

#### Wiring (see fig.2)

1. Connect the electrical wires as follows. Connect the black wire from the fixture to the black house (hot) Wire. Connect the white wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet box has a ground wire (green or bare copper) connect fixture's ground wire to it. Otherwise attach the bare copper fixture wire to the green ground screw on the single bar.
2. Tuck the wire connections neatly into the wall junction Box

Fig.1


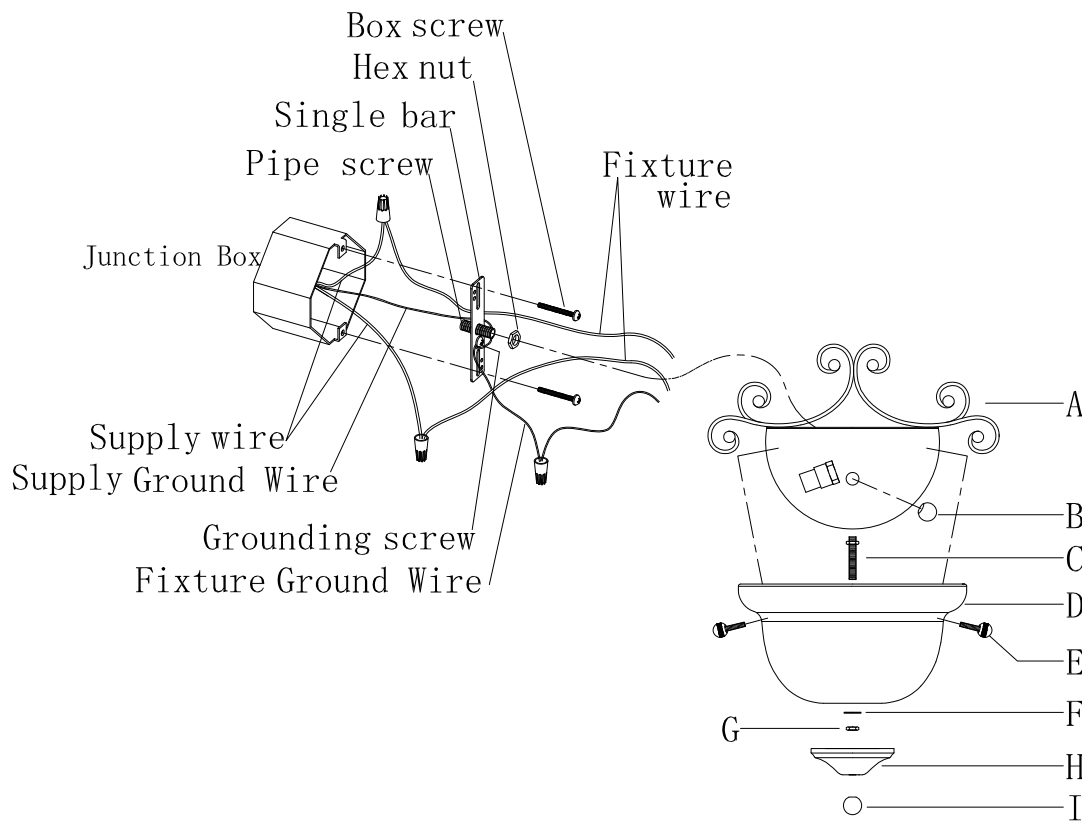


Fig.2

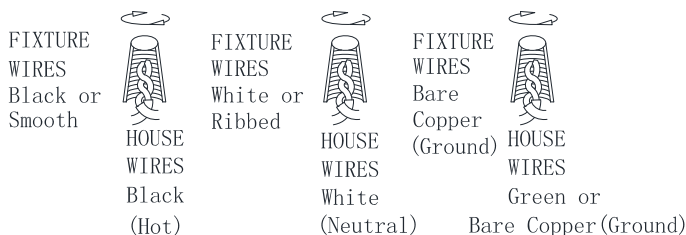

**LIVEX<sup>®</sup>**  
**LIGHTING**