


Type _____
-09 -10

P3575 ☐ ☐

Catalog No.	Finish		Lamping	Dimensions (Inches)		
	Brushed Nickel	Polished Brass		A	B	C
P3575	-09	-10	4 (m) 100w	27-3/8	24	60

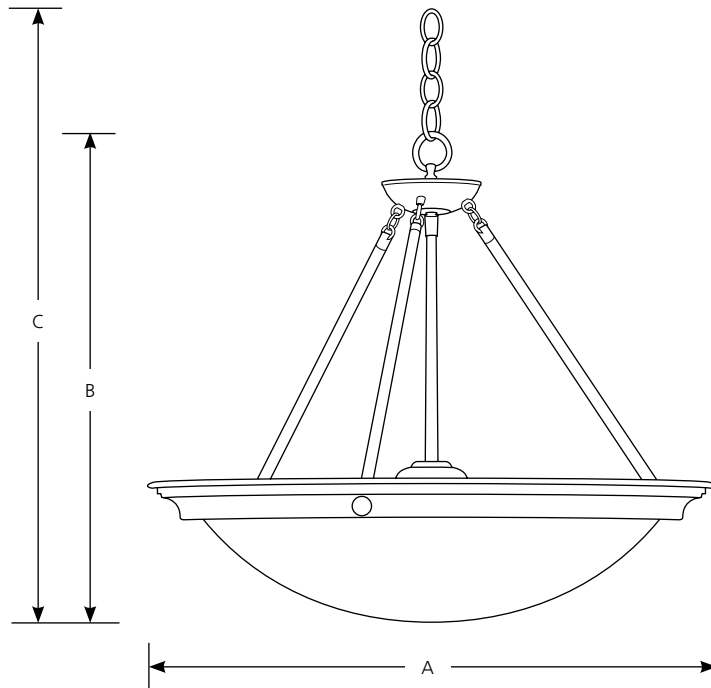

Specifications:

General

- Satin white glass bowl
- Plated Brushed Nickel (-09), Polished Brass (-10) finishes
- Steel construction
- Companion Close-to-ceiling, Hall and Foyer, Sconce, fixtures are available

Electrical

- 15 feet of wire supplied
- Medium base ceramic sockets
- Pre-wired

Labeling

- UL-CUL listed

Mounting

- Ceiling chain mount
- Canopy covers a standard 4" hexagonal recessed outlet box: 5-1/2" dia.
- Mounting strap for outlet box included

P3571 AND P3575

ECLIPSE - SEMI-FLUSH AND CHAIN HUNG



Report No. 97504

No. Lamps: 4 Type Lamp: 100A19-GE Total Lumens: 6840

Fixture Efficiency: 79.8%


S/MH Ratio: 1.3

Quick Calculator Charts

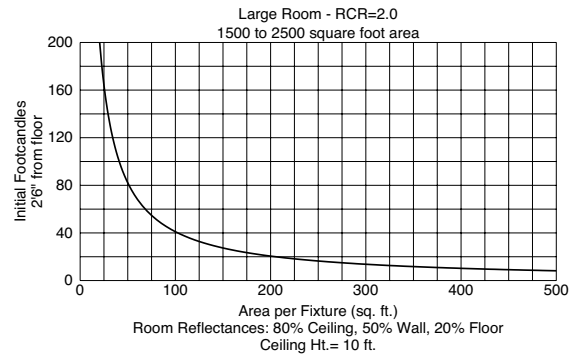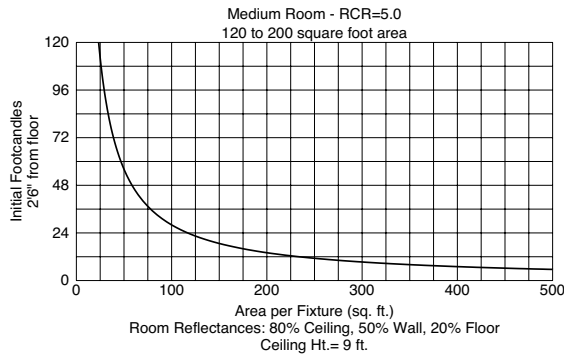

DISTRIBUTION CURVE

INTENSITY DATA

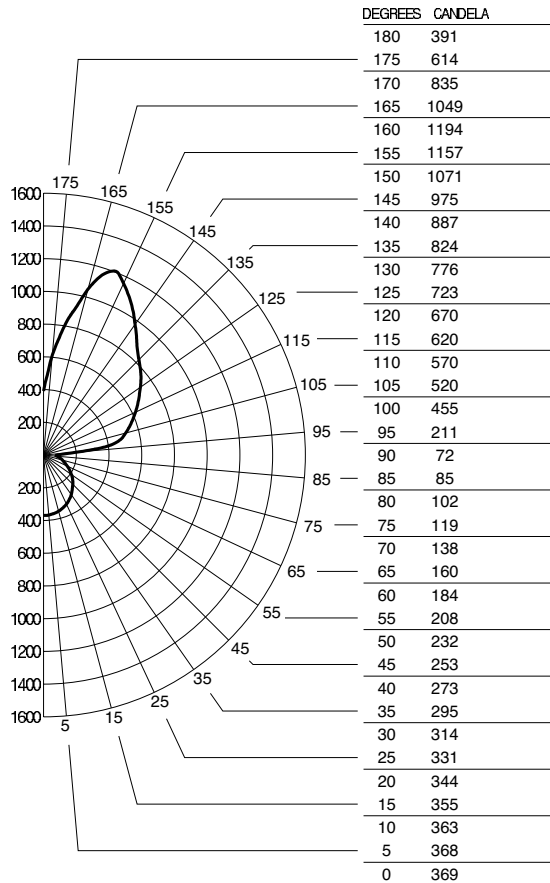

Single Fixture Data

Ceiling Ht.(Ft.)	10% Values Beam Angle - 111		Zero Degrees Ft.-C	50% Values Beam Angle - 65	
	Ft.-C	Beam Dia.		Ft.-C	Beam Dia.
8	1.2	16	12.2	6.1	7
10	0.7	22	6.6	3.3	9
12	0.4	28	4.1	2.0	12
14	0.3	34	2.8	1.4	15
16	0.2	40	2.0	1.0	17

Ft.-C (Footcandles) are initial and measured 2'-6" from floor

ZONAL CAVITY COEFFICIENTS OF UTILIZATION

		Effective Floor Cavity Reflectance 0.20																			
		80				70				50				30				10			
RC	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
0	80	80	80	80	80	71	71	71	71	54	54	54	39	39	39	25	25	25	18		
1	73	69	66	63	63	64	61	59	56	47	45	43	33	32	31	21	20	20	14		
2	66	60	55	51	51	58	53	49	46	41	38	35	29	27	26	18	17	16	11		
3	60	52	47	42	42	53	47	42	38	36	32	29	25	23	21	16	15	14	9		
4	55	46	40	35	35	48	41	36	32	31	28	25	22	20	18	14	13	12	8		
5	50	41	35	30	30	44	36	31	27	28	24	21	20	17	15	13	11	10	7		
6	46	37	30	26	26	40	33	27	23	25	21	18	18	15	13	11	10	9	6		
7	42	33	27	22	22	37	29	24	20	23	19	16	16	14	12	10	9	8	5		
8	39	30	24	20	20	35	26	21	18	20	17	14	15	12	10	9	8	7	5		
9	36	27	21	17	17	32	24	19	16	19	15	12	13	11	9	9	7	6	4		
10	34	24	19	15	15	30	22	17	14	17	13	11	12	10	8	8	7	5	4		