

Quoizel, Inc.
6 Corporate Parkway
Goose Creek, SC
29445

Customer Service
Phone 631.273.2700
Fax 631.231.7102
www. quoizel. com

Assembly Instruction Sheet #IS-FE5004WT For Style FE5004WT

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

Bulb Recommended: (4) Frosted G9 Halogen Bulbs 100W Maximum (Supplied)

Estimated Assembly Time: 20-30 minutes

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.



Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal. Do not subject glass parts to any shock while in operation or shattering may result.






Do not touch the bulb with bare hands use a cloth or glove.

Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700
or visit us on-line at www. quoizel. com

FE5004WT

FINISH: WESTERN BRONZE

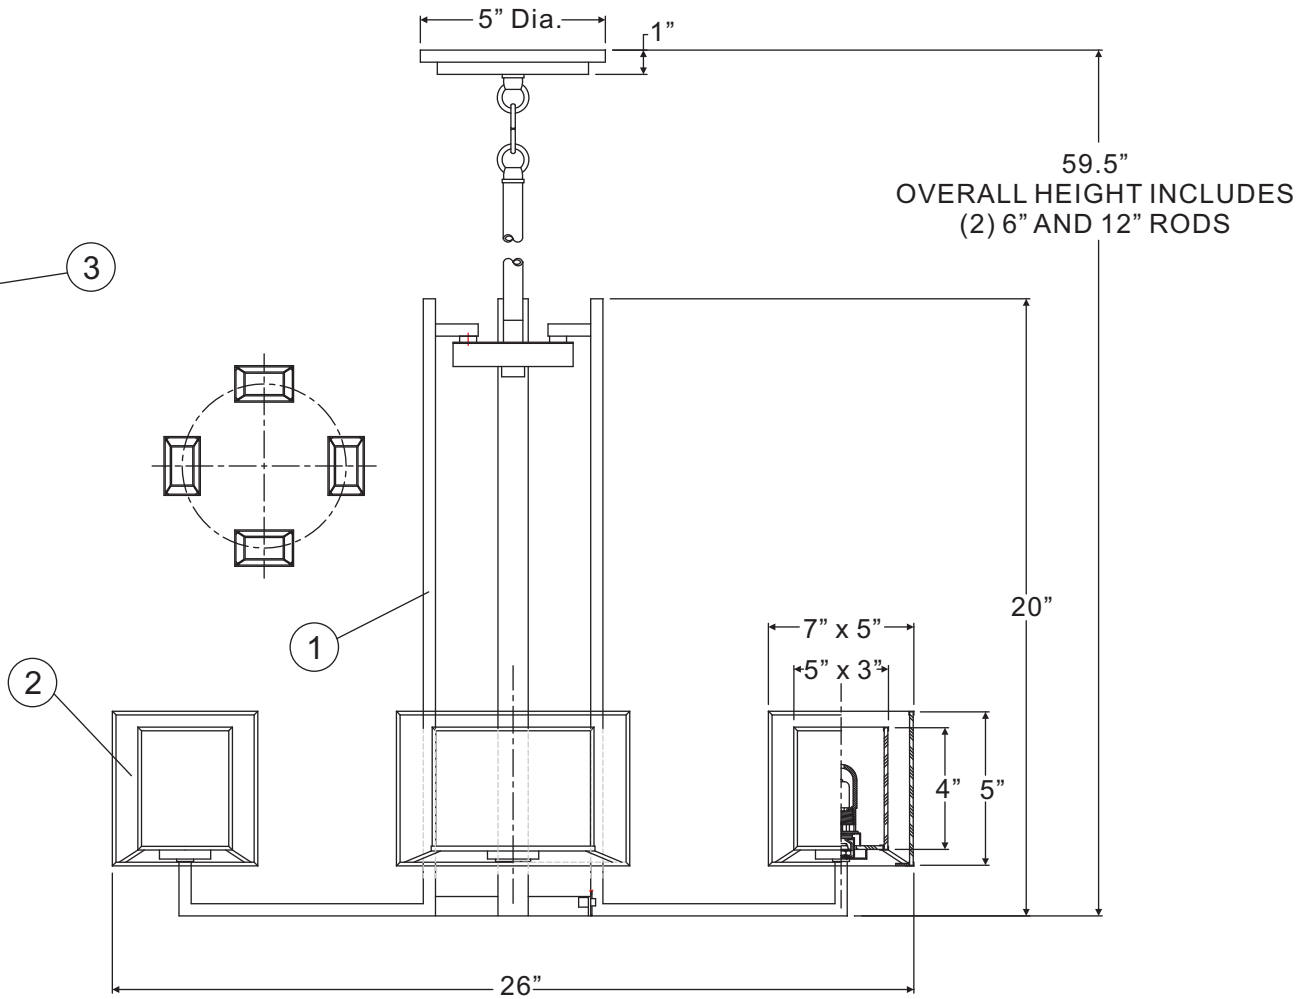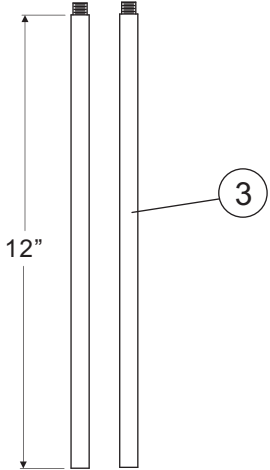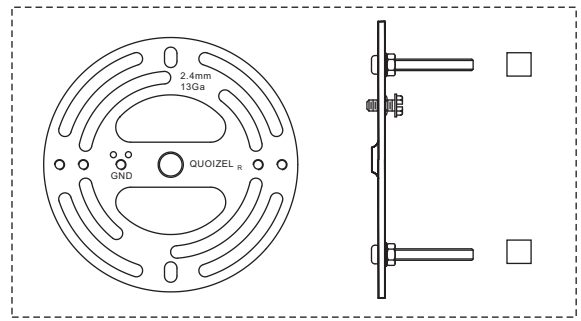

(4) 100W Frosted
G9 Halogen Bulbs
(Supplied)


NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/2"

NO.	PART NUMBER	REPLACEMENT PART DESCRIPTION	REQ.
1	15004WTFE	BASE WESTERN BRONZE FE5004WT	1
2	G3464SH	CLEAR SEEDY GLASS AND INNER GLASS	4
3	9008EXWT	ROD 0.63D 12" WESTERN BRONZE	2
4	9007EXWT	ROD 0.63D 6" WESTERN BRONZE	2

Assembly Instruction Sheet #IS-FE5004WT For Style FE5004WT

Package Contents

Part	Description	Quantity
A	Crossbar	1 pc.
B	Mounting Screw	2 pcs.
C	Lock Washer	2 pcs.
D	Hex Nut	2 pcs.
E	Mounting Ball	2 pcs.
F	Ceiling Canopy with Loop	1 pc.
G	6" Rod	2 pcs.
H	12" Rod	2 pcs.
I	Socket Collar	4 pcs.
J	Steel Collar	4 pcs.
K	Fixture Assembly	1 pc.
L	Lock Screw	4 pcs.
M	Ring	1 pc.
N	Shade	4 pcs.
O	Bulb	4 pcs.
P	Bulb Shield	4 pcs.

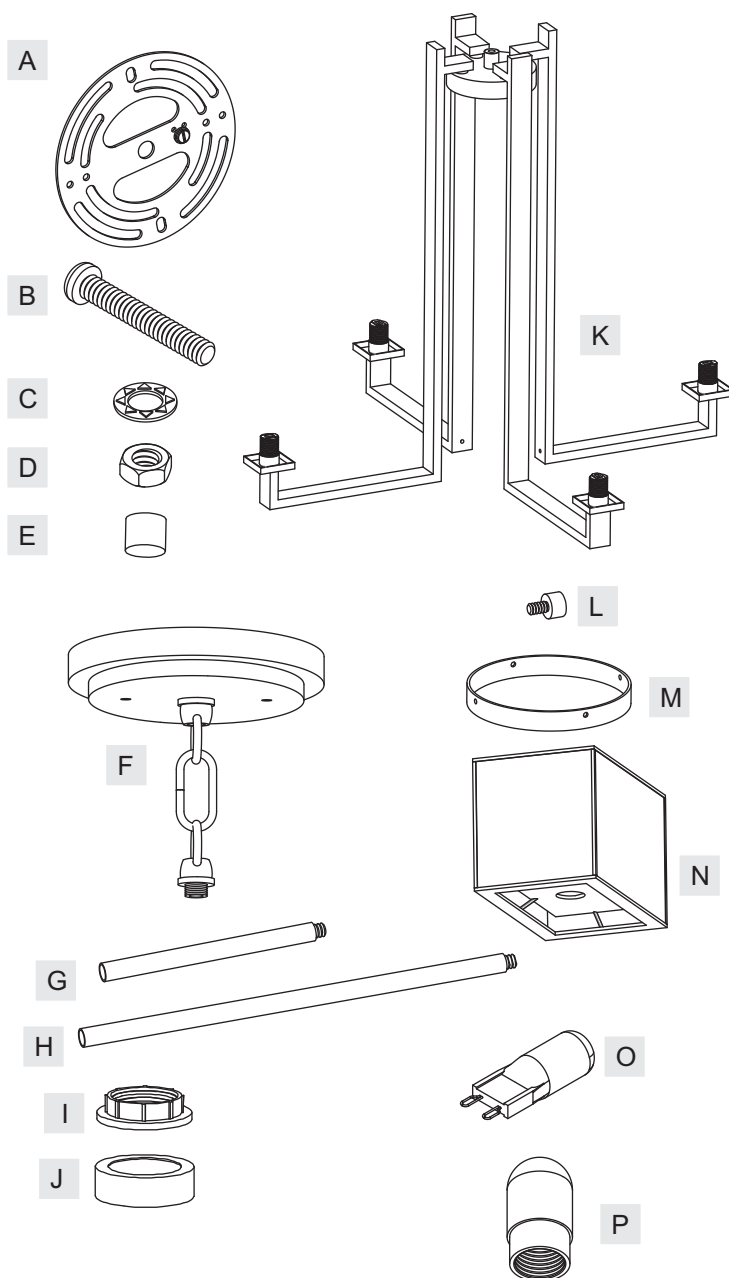

Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700
or visit us on-line at www. quozel. com

Assembly Instruction Sheet #IS-FE5004WT

For Style FE5004WT

STEP 1 – Adjust Fixture Assembly

- A. Unfold support arms on fixture assembly to proper locations.






Figure 1

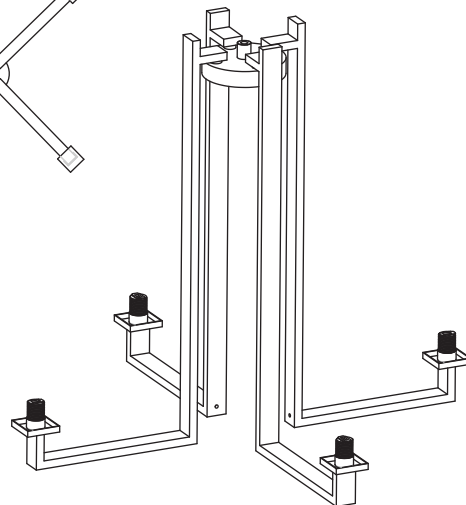

STEP 2 – Assemble Panel

- A. Line up the Holes on the Ring (M) with the Lock Holes on the Side Arms, thread the Lock Screws (L) into the Lock Holes on the Side Arms. Hand tighten until snug.

Figure 2

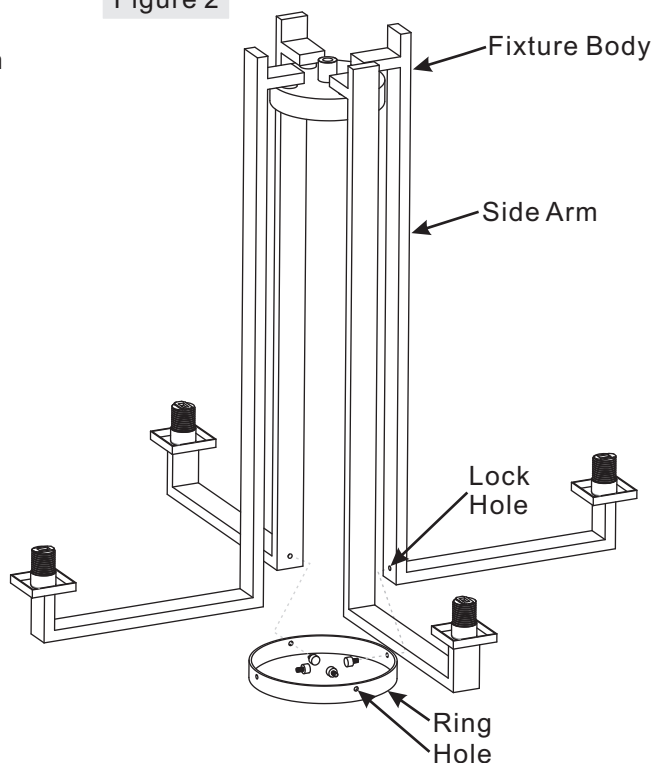

Thank you for purchasing a Quoizel product.


Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700
or visit us on-line at www.quoizel.com

Assembly Instruction Sheet #IS-FE5004WT For Style FE5004WT

STEP 3 – Assemble Rods

- Determine the Rods (G/H) to be assembled to the Fixture Assembly (K) according to your hanging height.
- Pass Supply Wires and Ground Wire through the chosen Rods (G/H) and then thread the chosen Rods (G/H) and the Fixture Assembly (K) together. Hand tighten until snug.


Figure 3

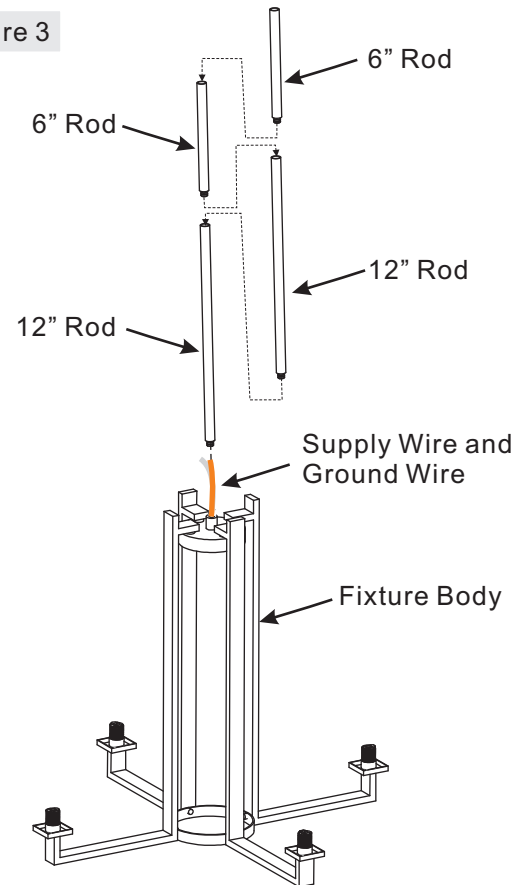

STEP 4 – Attach Ceiling Canopy with Loop to Rod

- Pass Supply Wire and Ground Wire through the Loop and the Ceiling Canopy. Thread the Loop underside of the Ceiling Canopy onto the Upper Rod and hand tighten until snug.

Figure 4

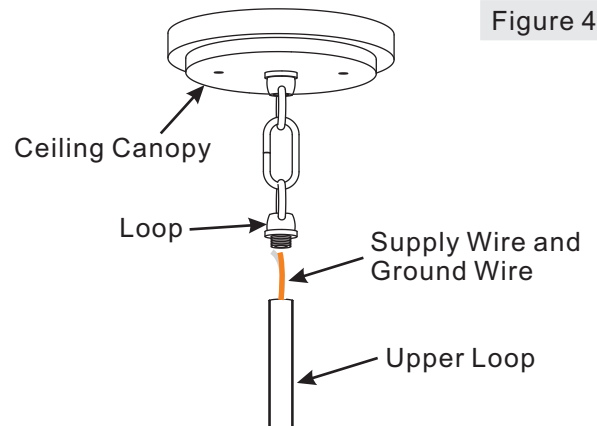

Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700
or visit us on-line at www.quoizel.com

Assembly Instruction Sheet #IS-FE5004WT For Style FE5004WT

STEP 5 – Attach Mounting Screws, Lock Washers and Hex Nuts to Crossbar

- Line up a set of holes on the Crossbar (A) and Holes on the Ceiling Canopy (F).
- Thread Mounting Screws (B) into the holes on the Crossbar (A), pass Lock Washers (C) and thread Hex Nut (D) onto the Mounting Screws (B). Hand tighten until snug.

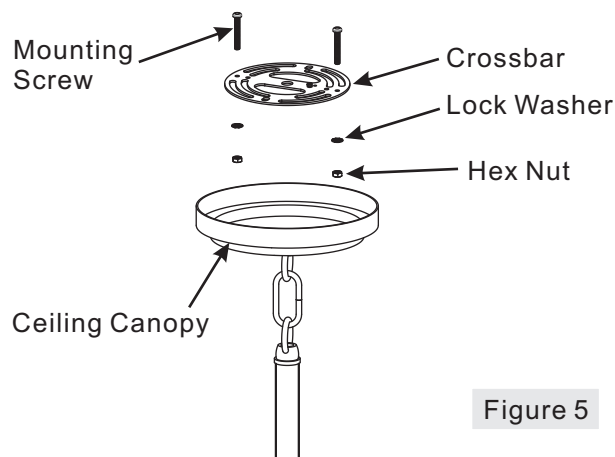


Figure 5

STEP 6 – Attach Crossbar to Outlet Box

- Attach the Crossbar (A) to Outlet Box and secure by threading Outlet Box Screws (not supplied) into the Mounting Holes on the Outlet Box. Tighten until snug.

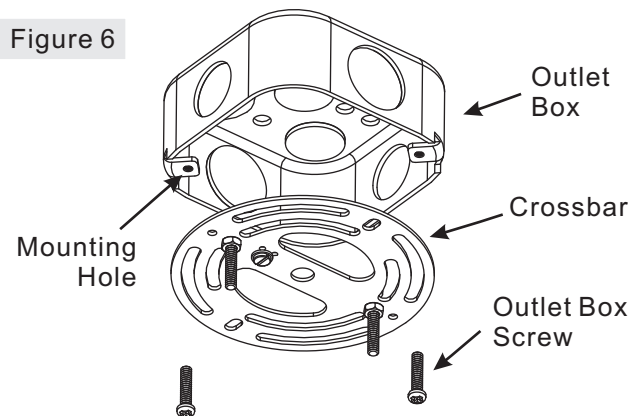


Figure 6

Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700
or visit us on-line at www.quoise.com

Assembly Instruction Sheet #IS-FE5004WT For Style FE5004WT

STEP 7 – Make Wire Connections

- Use standard wire connectors to make all wire connections. (Connectors are not included with fixture.) Strip and prepare wire ends according to instructions supplied with connectors.
- Connect White Supply Wire from the Outlet Box to White Wire from fixture.
- Connect Black (or Red) Supply Wire from the Outlet Box to Black Wire from fixture.
- Connect Ground Wire from the Outlet Box to Ground Wire from fixture.
- Twist connectors until wires are tightly joined together.
- Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

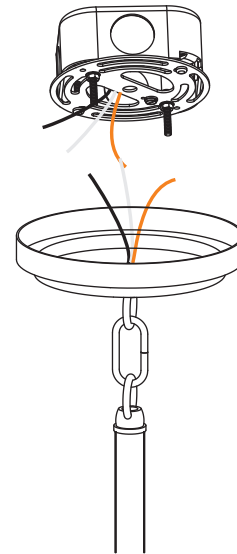


Figure 8

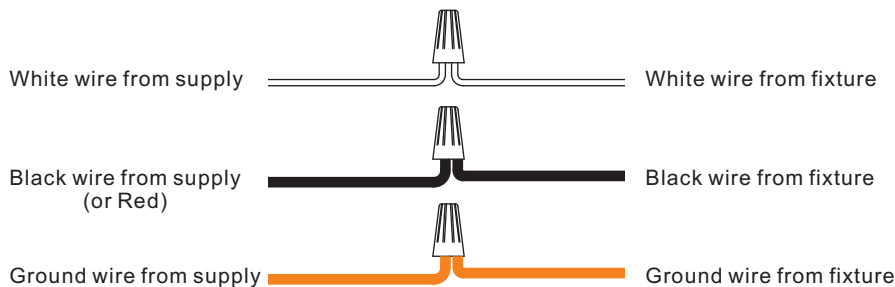


Figure 7

STEP 8 – Attach Ceiling Canopy to Mounting Screw

- Place the Ceiling Canopy (F) over the Mounting Screws (B) and secure with Mounting Balls (E). Hand tighten until snug.

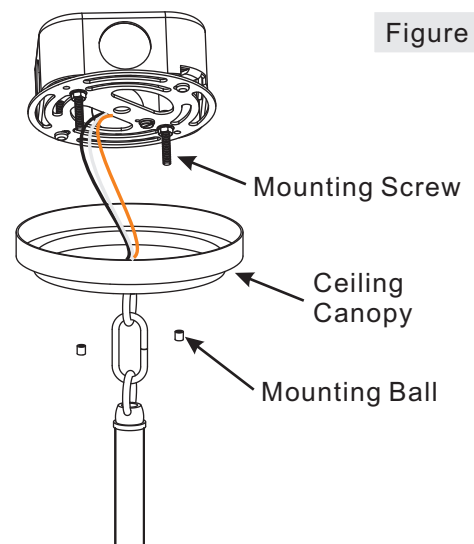


Figure 9

Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700
or visit us on-line at www.quoizel.com

Assembly Instruction Sheet #IS-FE5004WT For Style FE5004WT

STEP 9 – Attach Shade to Socket

- A. Place the Shade (N) and Steel Collar (J) over the Socket as shown. Thread the Socket Collar (I) onto the Socket to secure the Shade (N). Hand tighten until snug.

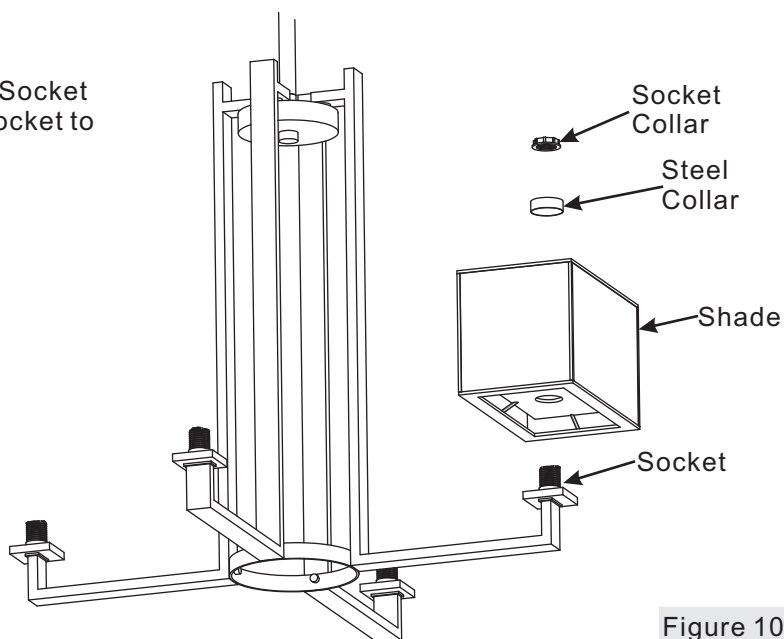


Figure 10

STEP 10 – Install Bulb and Bulb Shield

- A. This fixture uses Frosted G9 Halogen Bulbs. Maximum 100 watts (supplied).
B. Insert bulb and seat properly into place.
C. Screw Bulb Shield (P) onto the Socket and hand tighten until snug.

IMPORTANT: Do not touch the bulb with bare hands use a cloth or glove.

Your fixture is now assembled and ready to use.
Enjoy!

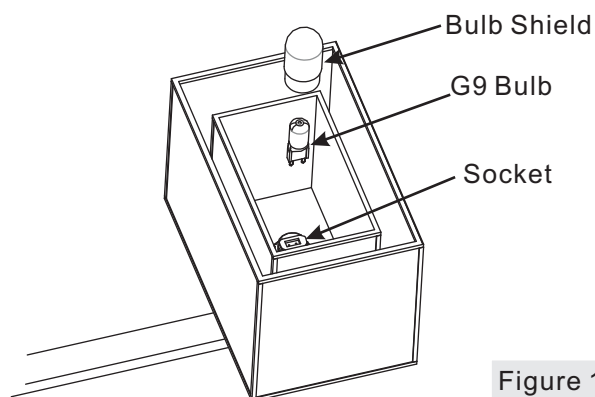


Figure 11

CAUTION FOR BULB REPLACING

- A. When replace bulb, turn off power and allow lamp to cool. For safety purpose, wear gloves and eye protection.
B. If bulb is scratched or cracked, DO NOT use the lamp to avoid breakage during use or installation.
C. Use only in fixtures rated for lamps wattage and voltage.
D. Lamp operate under high pressure generating intense heat. Prevent contact with liquid and combustible materials.

Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700
or visit us on-line at www.quoizel.com