

Quoizel, Inc. 6 Corporate Parkway Goose Creek, SC 29445

Customer Service Phone 631.273.2700 Fax 631.231.7102 www.quoizel.com

# Assembly Instruction Sheet #IS-MY2816 For Styles MY2816ML

**Tools Required:** Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses

Bulb Recommended: (3) Medium Base 100W Maximum

Estimated Assembly Time: 30-45 minutes

**Preparation:** Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.



## **Warnings and Cautions**

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal. Do not subject glass parts to any shock while in operation or shattering may result.


Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700

or visit us on-line at www.quoizel.com

December 2013

1of8

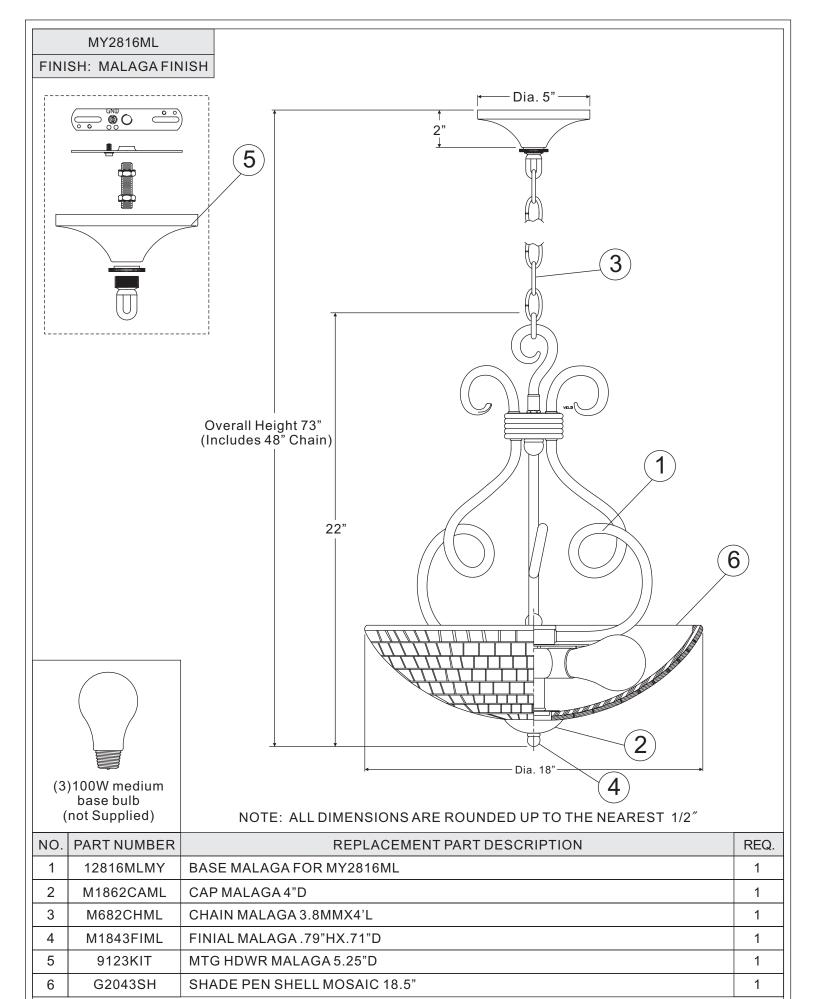


2of8



# Assembly Instruction Sheet #IS-MY2816 For Styles MY2816ML

## **Package Contents**

Part	Description	Quantity
Α	Crossbar	1 pc.
В	Nipple	1 pc.
С	Lock Washer	2 pcs.
D	Hex Nut	3 pcs.
Е	Canopy Chain Loop	1 pc.
F	Canopy Lock Ring	1 pc.
G	Fixture Chain	1 pc.
Н	Ceiling Canopy	1 pc.
1	Fixture Loop	1 pc.
J	Scroll Part	1 pc.
K	Shade Stop	1 pc.
L	Rubber Washer	1 pc.
М	Flat Washer	1 pc.
N	Сар	1 pc.
0	Socket Assembly	1 pc.
Р	Nipple with Hex Nuts	1 pc.
Q	Spacer Tube	1 pc.
R	Check Ring	1 pc.
S	Finial	1 pc.
Т	Shade	1 pc.

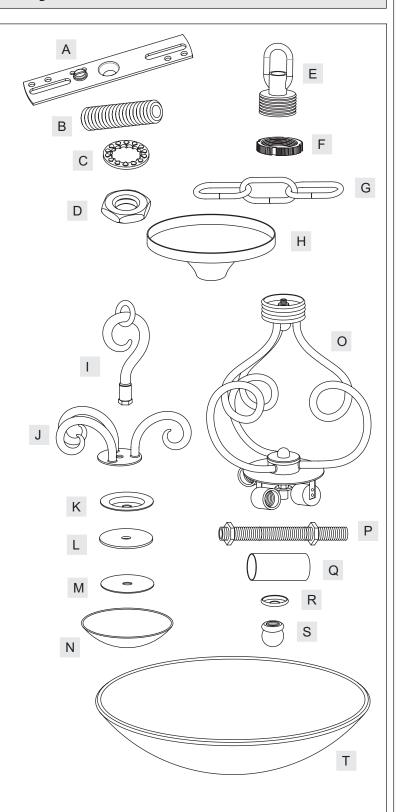

Thank you for purchasing a Quoizel product.
Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700
or visit us on-line at www.quoizel.com


December 2013

c 2013 Quoizel Inc.

# Assembly Instruction Sheet #IS-MY2816 For Styles MY2816ML

# STEP 1 - Assemble Socket Assembly, Scroll Part and Fixture Loop

A. Locate the center hole of the Scroll Part (J) over the nipple in the top center of the Socket Assembly (O). Secure by threading the Fixture Loop (I) onto the nipple. Hand tighten until snug.

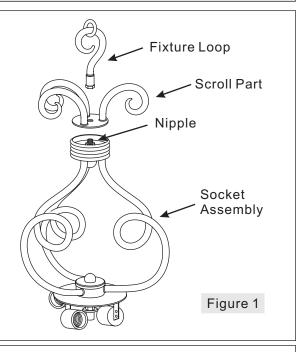

### STEP 2 - Attach Crossbar to Outlet Box

A. Secure the Corssbar (A) to the outlet box with outlet box screws (not supplied). Tighten until snug.





Figure 2

### **STEP 3** – Attach Nipple to Crossbar

- A. Thread one Hex Nut (D) onto the top end of the Nipple (B).
- B. Place one Lock Washer (C) over the top end of the Nipple (B) and then thread the Nipple (B) into the center lock hole of the Crossbar (A).
- C. Using pliers, thread the hex Nut (D) against the Crossbar (A) and hand tighten until snug.



Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700

or visit us on-line at www.quoizel.com


c 2013 Quoizel Inc.

December 2013

# Assembly Instruction Sheet #IS-MY2816 For Styles MY2816ML


### STEP 4 - Attach Canopy Chain Loop to Nipple

- A. Thread another Hex Nut (D) onto the end of the Nipple (B).
- B. Place the Lock Washer (C) over the end of the Nipple (B) and then thread the Canopy Chain Loop (E) onto the end of the Nipple (B).
- C. Using pliers, thread the Hex Nut (D) against the Canopy Chain Loop (E) and hand tighten until snug.

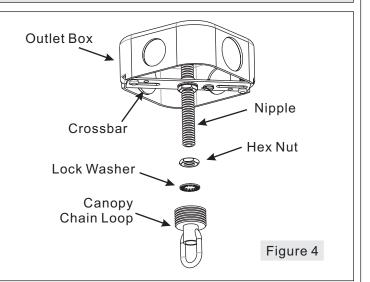


### STEP 5 - Assemble Ceiling Canopy

A. Push the Ceiling Canopy (H) upward over the Outlet Box. Thread the Canopy Lock Ring (F) onto the Canopy Chain Loop (E) and tighten until snug to secure the Ceiling Canopy (H).



### STEP 6 – Attach Fixture Chain to Canopy Chain Loop and Fixture Loop

- A. Adjust the Fixture Chain (G) to your desired length by removing the links if needed. You may need to use plier to open the chain links. If so, put a cloth over the chain to protect the finish from the pliers.
- B. Attach one end of the Fixture Chain (G) onto the Canopy Chain Loop (E) and then attach the other end of the Fixture Chain (G) onto the Fixture Loop (I) on the top of the fixture.



Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700

or visit us on-line at www.quoizel.com


c 2013 Quoizel Inc.

December 2013

# Assembly Instruction Sheet #IS-MY2816 For Styles MY2816ML


## STEP 7 - Pass Supply Wires through Fixture Chain


A. Pull the Supply Wires and Ground Wire up through the Fixture Chain (G) alternating links. Push the wires up through the Canopy Chain Loop (E) into the outlet box.



#### STEP 8 - Make Wire Connections

- A. Un-thread the Canopy Lock Ring (F) and slide Canopy Lock Ring (F) and Ceiling Canopy (H) down the Fixture Chain (G).
- B. Push all slack fixture wire through Canopy Chain Loop (E) into Outlet Box. Trim excess fixture wire leaving a minimum of 6 inch. Hanging out of the Outlet Box.
- C. Use standard wire connectors to make all wire connections. (Connectors are not included with fixture.) Strip and prepare wire ends according to instructions supplied with connectors.
- D. Connect White Supply Wire from the Outlet Box to White Wire from fixture.
- E. Connect Black (or Red) Supply Wire from the Outlet Box to Black Wire from fixture.
- F. Connect Ground Wire from the Outlet Box to Ground Wire from fixture.
- G. Twist connectors until wires are tightly joined together.
- H. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.
- G. Re-attach the Ceiling Canopy (H) as shown in Step 5.

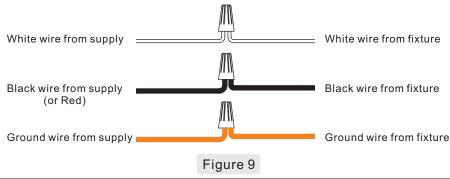

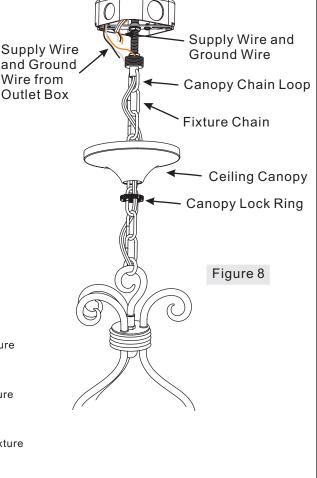

Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700


or visit us on-line at www.quoizel.com

December 2013

# Assembly Instruction Sheet #IS-MY2816 For Styles MY2816ML

# STEP 9 – Attach Nipple with Hex Nuts to Socket Assembly


A. Screw one end of the Nipple with Hex Nuts (P) into the coupling underside of the Socket Assembly (O). Using pliers, thread one hex nut against the coupling and hand tighten until snug.



#### STEP 10 - Attach Shade


- A. Adjust the another hex nut on the Nipple with Hex Nuts (P) to proper locations for rest components.
- B. Pass the following components over the end of the Nipple in turn:

Spacer Tube (Q), Check Ring (R), Shade Stop (K), Shade (T), Rubber Washer (L) and Flat Washer (M). Secure them by threading the Hex Nut (D) onto the Nipple (P). Tighten gently until snug.

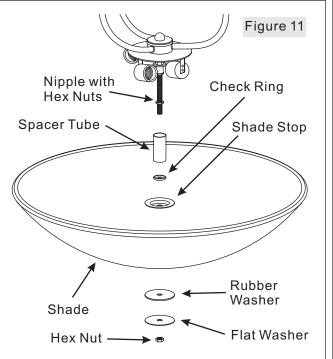

### STEP 11 - Attach Cap

A. Place the Cap (N) over the nipple extruding from the bottom of the Shade (T) and secure with the Finial (S). Hand tighten until snug.



Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700

or visit us on-line at www.quoizel.com

December 2013




# Assembly Instruction Sheet #IS-MY2816 For Styles MY2816ML

### STEP 12 - Install Bulb

- A. This fixture uses standard bulb with medium base . Maximum 100 watts.
- B. Insert bulb and screw snugly into place.

Your fixture pendant lamp is now assembled and ready to use. Enjoy!

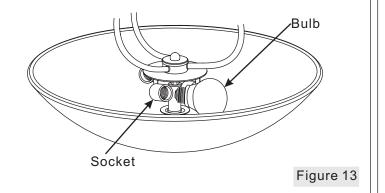

Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700

or visit us on-line at www.quoizel.com

December 2013