Q U O I Z E L 6 CORPORATE PARKWAY GOOSE CREEK, SC. 29445 www. quoizel. com

Quoizel, Inc. 6 Corporate Parkway Goose Creek, SC 29445

Customer Service Phone 631.273.2700 Fax 631.231.7102 www.quoizel.com

Assembly Instruction Sheet #IS-TF135FBC For Style TF135FBC

Tools Required: None

Bulb Recommended: (3) Medium Base 75W Maximum

Estimated Assembly Time: 15-20 minutes

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.



Warnings and Cautions


Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal. Do not subject glass parts to any shock while in operation or shattering may result.

Package Contents

Part	Description	Quantity
Α	Finial	1 pc.
В	Shade	1 pc.
С	Big Knurled Nut	1 pc.
D	Small Knurled Nut	1 pc.
E	Check Ring	1 pc.
F	Spacer 4 ½"L	1 pc.
G	Nipple 5"L	1 pc.
Н	Hex Nut	1 pc.
- 1	Socket Assembly	1 pc.
J	Rod	1 pc.
K	Rod with Nipple	1 pc.
L	Base	1 pc.

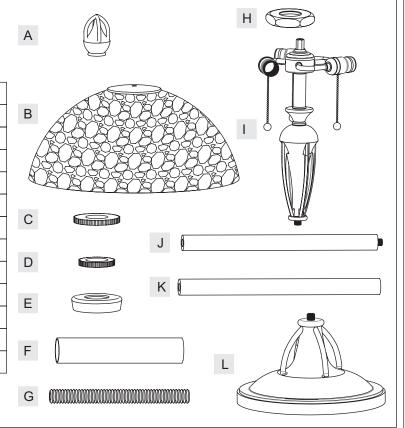


June 2013

Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700 or visit us on-line at www.quoizel.com

© 2013 Quoizelinc.

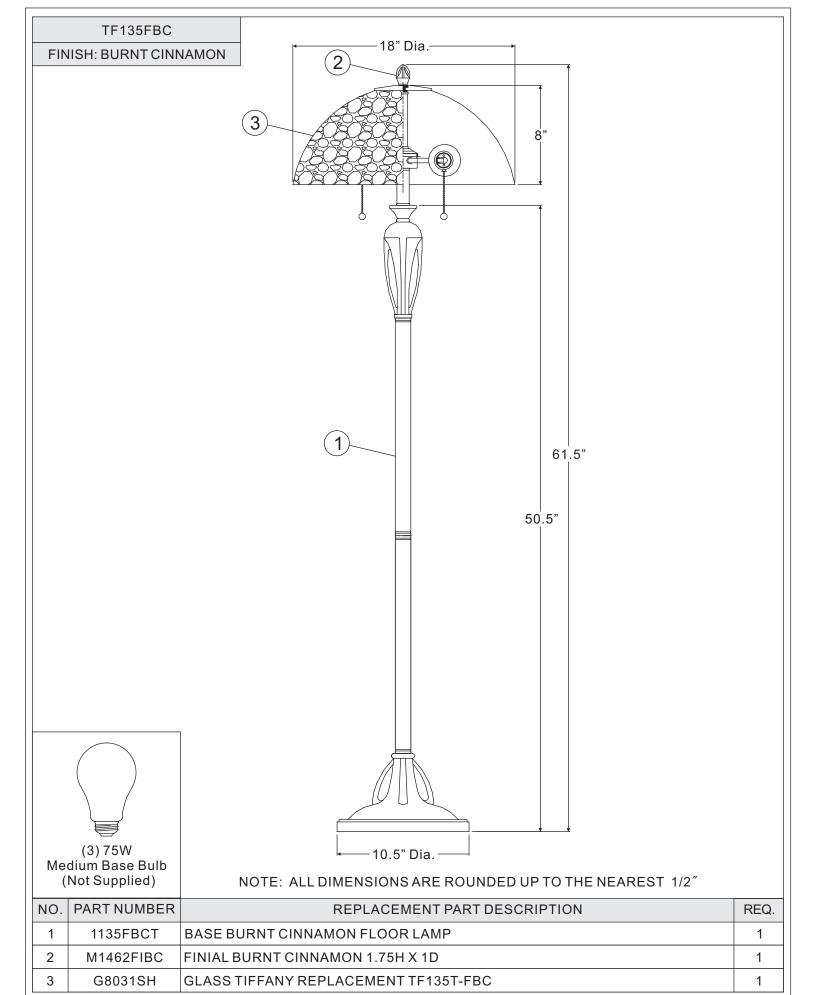


2of5



Assembly Instruction Sheet #IS-TF135FBC For Style TF135FBC


STEP 1 – Assemble Rod and Socket Assembly

- A. Thread the Rod (J) and Rod with Nipple(K) to the Base (L) as shown. Hand tighten until snug.
- B. Thread the Socket Assembly (I) into the top end of Rod with Nipple (K). Hand tighten until snug.

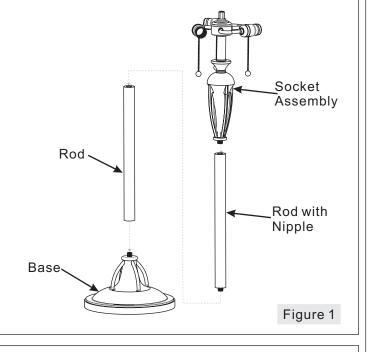

STEP 2 - Install Stem

A. Thread the Hex Nut (H) onto the short nipple end of Nipple (G) then thread have Hex Nut (H) end of Nipple (G) into the Hex Coupling on the top of Socket Assembly(I). Hand tighten until snug.

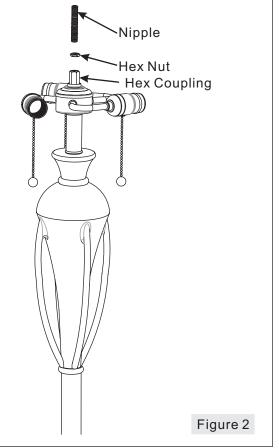

Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700

or visit us on-line at www.quoizel.com


© 2013 Quoizel Inc. June 2013

Q U O I Z E L 6 CORPORATE PARKWAY GOOSE CREEK, SC. 29445 www. quoizel. com

Assembly Instruction Sheet #IS-TF135FBC For Style TF135FBC


STEP 3 - Attach Spacer to Fixture

A. Place the Spacer (F) and Check Ring (E) over the Nipple (G). Secure by thread the Small Knurled Nut (D) onto the Nipple (G). Hand tighten until snug.



STEP 4 - Assemble Shade

- A. Thread the Big Knurled Nut (C) onto the Stem(G), hand tighten until snug.
- B. Place the Shade (B) over the Nipple (G). Secure by thread the Finial (A) onto the Nipple(G). Hand tighten until snug.

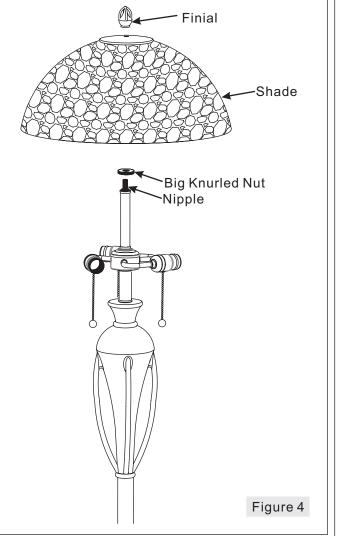

June 2013

Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700

or visit us on-line at www.quoizel.com

© 2013 Quoizel Inc.




Assembly Instruction Sheet #IS-TF135FBC For Style TF135FBC

STEP 5 - Install Bulb

- A. This fixture uses standard bulbs with medium screw bases. Maximum 75 watts.
- B. Insert bulb and screw snugly into place.

Your fixture is now assembled and ready to use. Enjoy!

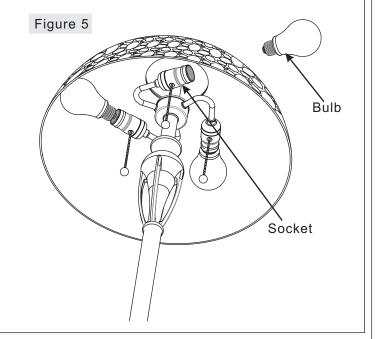

Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700 or visit us on-line at www.quoizel.com

June 2013