

Quoizel, Inc.  
6 Corporate Parkway  
Goose Creek, SC  
29445

Customer Service  
Phone 631.273.2700  
Fax 631.231.7102  
www.quoizel.com

## Assembly Instruction Sheet #IS-VTIN8602C For Style VTIN8602C

**Tools Required:** Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

**Bulb Recommended:** (2) G9 Base Frosted G9 Halogen 75W Maximum

**Estimated Assembly Time:** 20-30 minutes

**Preparation:** Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.



### Warnings and Cautions


Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal. Do not subject glass parts to any shock while in operation or shattering may result.

### Package Contents

| Part | Description        | Quantity |
|------|--------------------|----------|
| A    | Fixture Body       | 1 pc.    |
| B    | Front Panel        | 1 pc.    |
| C    | Self-tapping Screw | 2 pcs.   |
| D    | Lock Screw         | 4 pcs.   |
| E    | G9 Bulb            | 2 pcs.   |
| F    | Bulb Shield        | 2 pcs.   |
| G    | Socket Collar      | 2 pcs.   |
| H    | Steel Collar       | 2 pcs.   |
| I    | Shade              | 2 pcs.   |
| J    | Socket Collar Tool | 1 pc.    |




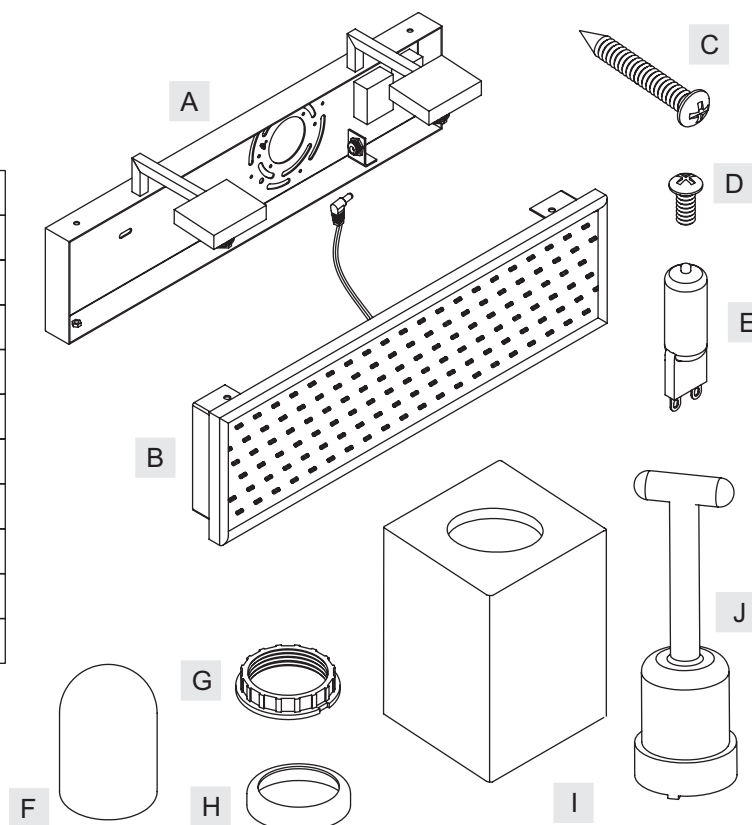


Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700  
or visit us on-line at [www.quoizel.com](http://www.quoizel.com)

VTIN8602C

FINISH: POLISHED CHROME

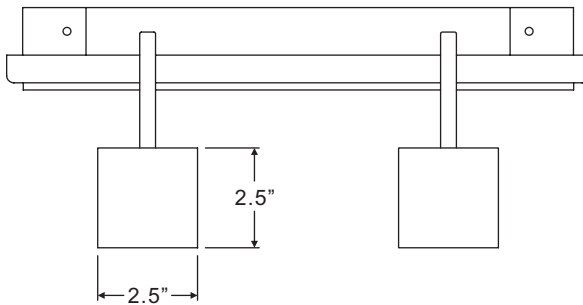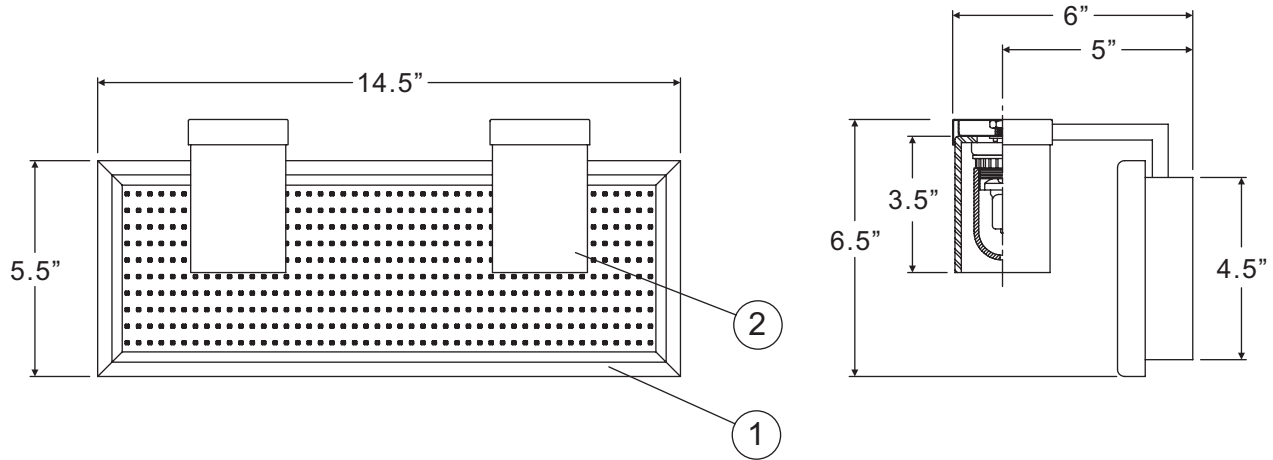

(2)75W Frosted  
G9 Halogen Bulbs  
(Supplied)

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/2"


| NO. | PART NUMBER | REPLACEMENT PART DESCRIPTION    | REQ. |
|-----|-------------|---------------------------------|------|
| 1   | 18602CVTIN  | BASE POLISHED CHROME VTIN8602C  | 1    |
| 2   | G2912SH     | SHADE OPAL GLASS 2.5"SQ X 3.5"H | 2    |

## Assembly Instruction Sheet #IS-VTIN8602C For Style VTIN8602C

### STEP 1 – Attach Fixture Body to Outlet Box

- Attach the Fixture Body (A) to Outlet Box and line up the mounting holes on the Outlet Box with a set of holes on the Fixture Body (A).
- Mark two points on the wall from the Slot Holes. Remove the Fixture Body (A) from the Outlet Box.
- Drill proper holes from the two marks on the Wall. Push the Wall Anchors inside of the drilled holes.
- Place the Fixture Body (A) onto the Outlet Box. Screw the Outlet Box Screws into the mounting holes on the Outlet Box and thread the Self-tapping Screws (C) into the Wall Anchors to secure the Fixture Body (A). Hand tighten until snug.

Figure 1

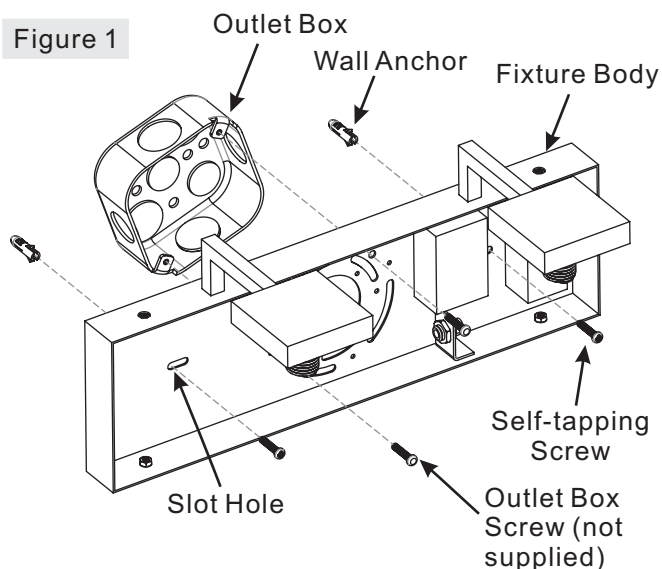

### STEP 2 – Make Wire Connections

- Use standard wire connectors to make all wire connections. (Connectors are not included with fixture.) Strip and prepare wire ends according to instructions supplied with connectors.
- Connect White Supply Wire from the Outlet Box to White Wire from Flip Switch Device.
- Connect Black (or Red) Supply Wire from the Outlet Box to Black Wire from Flip Switch Device.
- Connect Ground Wire from the Outlet Box to Green Ground Screw on Fixture Body (A).
- Twist connectors until wires are tightly joined together.
- Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

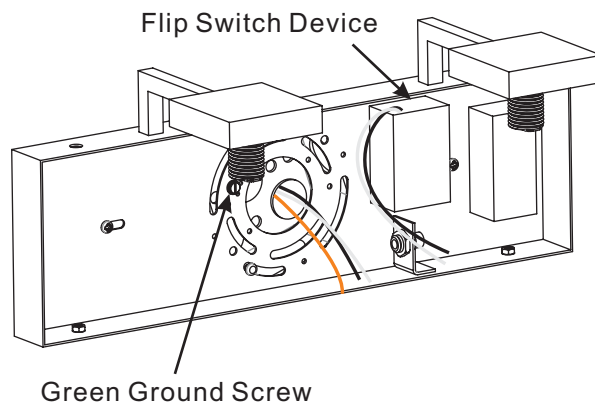


Figure 2

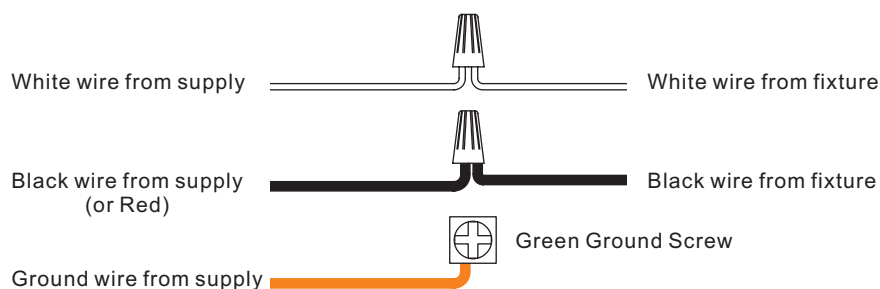


Figure 3

Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700  
or visit us on-line at [www. quozel. com](http://www. quozel. com)

# Assembly Instruction Sheet #IS-VTIN8602C For Style VTIN8602C

## STEP 3 – Attach Front Panel to Fixture Body

- A. Insert the Round Plug on the Front Panel (B) into the Plug Receptacle on the Fixture Body (A) as shown.
- B. Place the Front Panel (B) onto the Fixture Body (B). Line up holes on the top and bottom of the Front Panel (B) and Mounting Holes on the top and bottom of the Fixture Body (A). Secure by threading the Lock Screws (D) into the Mounting Holes on the Fixture Body (A). Hand tighten until snug.

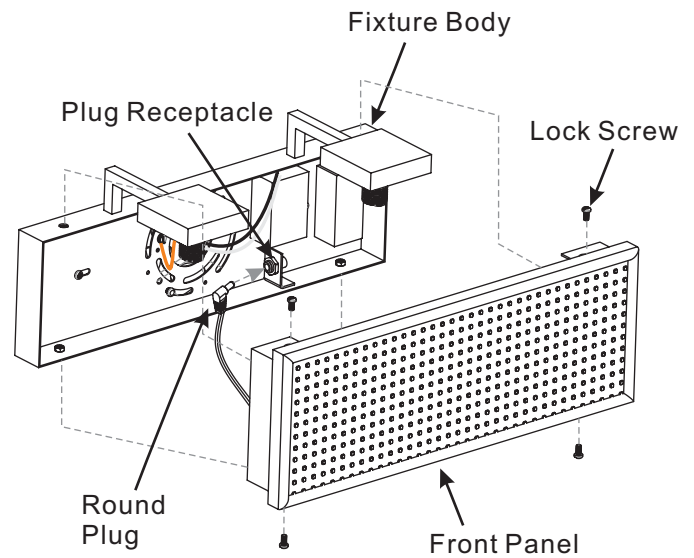


Figure 4

## STEP 4 – Attach Shade to Socket

- A. Place the Shade (I) and the Steel Collar (H) over the Socket. By using the Socket Collar Tool (J), thread the Socket Collar (G) onto the socket to secure the Shade (I). Hand tighten until snug.

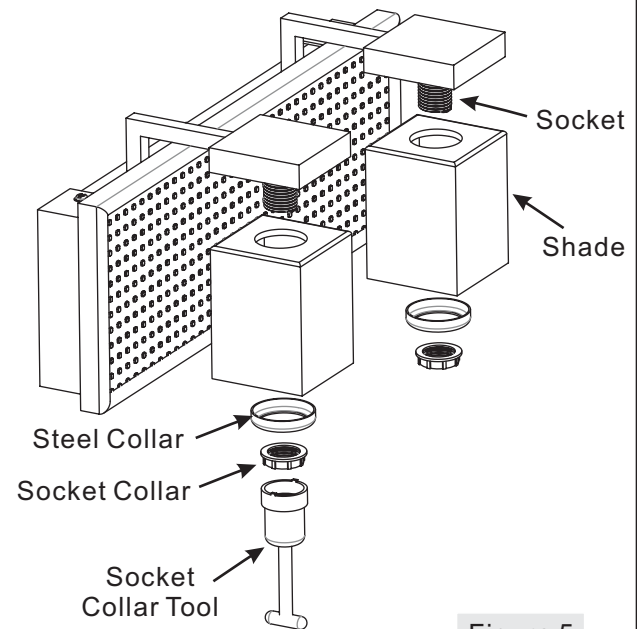


Figure 5

Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700  
or visit us on-line at [www.quoizel.com](http://www.quoizel.com)


# Assembly Instruction Sheet #IS-VTIN8602C For Style VTIN8602C

## STEP 5 – Install Bulb and Bulb Shield

- A. This fixture uses JCD G9 Frosted Bulbs with G9 Base.  
Maximum 75 watts.
- B. Insert bulb and seat properly into place.
- C. Screw Bulb Shield (F) onto the Socket and hand tighten until snug.

Your lamp wall fixture is now assembled and ready to use.  
Please note that the G9 Bulbs and the LED lights inside of the Front Panel can be turned on independently by the wall Switch (Please refer to the next Step).

Figure 6

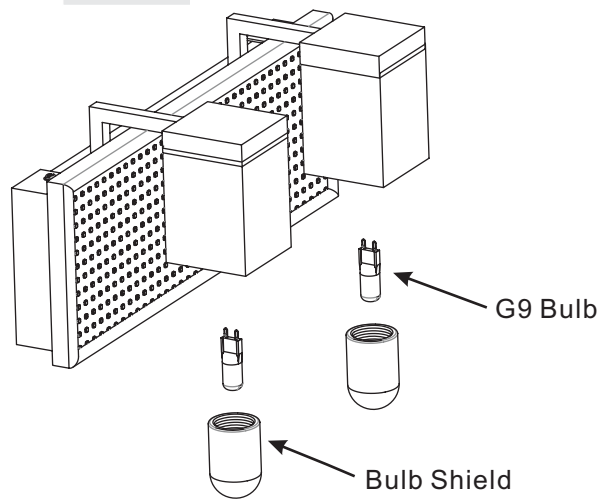


## SWITCHING MODE

The switching features of the product allows for you to change your lighting mode from halogen to LED.

### STEP 6:

- a. Flip the switch "ON" and the halogen lamps illuminates.




### STEP 7:

- a. Flip the switch "OFF" to turn off the halogen lamps for one second.




### STEP 8:

- a. Flip the switch "ON" to turn the LED lamps ON.



### STEP 9:

- a. Flip the switch "OFF" to turn off LED lamps.



### STEP 10:

- a. Sequence begins over.

**Note:** When no switch has occurred for 30 minutes, the halogen lights are programmed to come on first.

Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700  
or visit us on-line at [www.quoizel.com](http://www.quoizel.com)

## Assembly Instruction Sheet #IS-VTIN8602C For Style VTIN8602C

### CAUTION FOR BULB REPLACING

- A. When replace bulb, turn off power and allow lamp to cool. For safety purpose, wear gloves and eye protection.
- B. If bulb is scratched or cracked, DO NOT use the lamp to avoid breakage during use or installation.
- C. Use only in fixtures rated for lamps wattage and voltage.
- D. Lamp operate under high pressure generating intense heat. Prevent contact with liquid and combustible materials.

**Thank you for purchasing a Quoizel product.**

**Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700  
or visit us on-line at [www.quoizel.com](http://www.quoizel.com)**