

# FX-3562-8 INSTALLATION SHEET

## IMPORTANT SAFETY INSTRUCTIONS:

\* These instructions are provided for your safety. It is very important that they are read completely before beginning the installation of your fixture.


\* DIRECT WIRE FIXTURES: WE STRONGLY RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN.

## TO ASSEMBLE:

Shut off the main electrical supply at fuse box/circuit breaker.

Remove all parts from carton. Do not throw away any parts as shown.

1. Loosen the socket ring (2), install the shade (1) and tighten it by socket ring (2).
2. Install the bulb (3)
3. Tight the ring (4), install the chain and adjust to desired length.
4. Put the wires through the canopy and I-bar,
5. Connect the ground wire "⏏" to the supply wire, Cathode wire "N" in white to the supply wire, Anode wire "L" in black to the supply wire in the junction box as illustrated with wire nuts (5)
6. Affix the I bar (6) to the junction box by screws.
7. Affix the canopy to the I bar and tight it by ring (7,8).

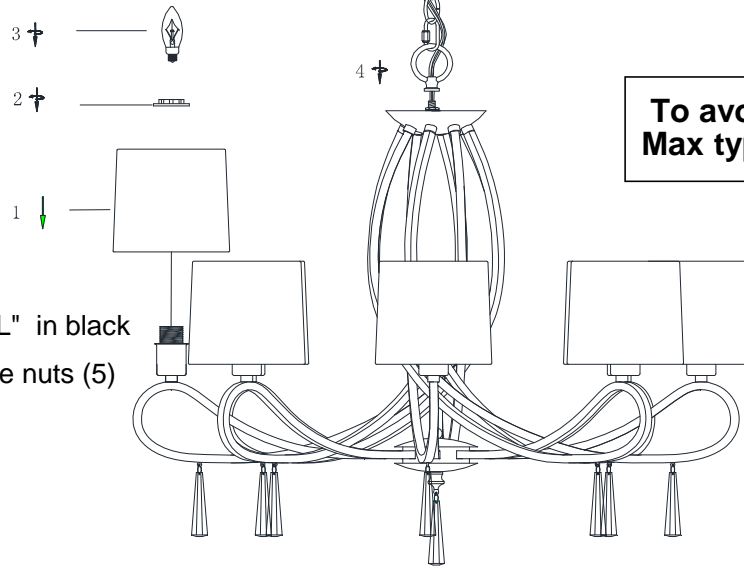

## WARNINGS:

Turn off power before replacing the bulb(s), making sure the bulb(s) have sufficient time to cool down. Do not subject the lighting fixture to any shock while lit as shattering of bulbs may result.

## CARE INSTRUCTIONS:

To clean, use a soft cloth only. DO NOT use any chemical or abrasive cleaners.

**To avoid risk of fire, Use 60 WattX8 Max type B Bulb (Bulb not included)**

★ Keep this instruction for future reference