

# Jeremiah

## Lighting

### ASSEMBLY & INSTALLATION INSTRUCTIONS FOR #22441

Please read carefully and save these instructions, as you may need them at a later date.

#### CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

#### GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.



#### ASSEMBLY AND INSTALLATION

- At the center of the BRACKET(2) there are eight perforated slots. Knock out the set matches your OUTLET BOX (1).
- Screw the #8-32 FIXTURE MOUNTING SCREWS (13) into the BRACKET(2) and thread the #8-32 HEX NUTS (14) onto the FIXTURE MOUNTING SCREWS (13), as shown. Secure the position of the FIXTURE MOUNTING SCREWS (13) by tightening the HEX NUTS (14) against the BRACKET(2).
- Carefully pass the power supply (6&8) wires and the SUPPLY GROUND WIRE (5) through the center hole of the BRACKET(2). Secure the BRACKET(2) to the OUTLET BOX (1) with MOUNTING SCREWS (3).
- Attach the BLACK SUPPLY WIRE (8) to the SMOOTH (or BLACK) FIXTURE LEAD WIRE (9) by using the WIRE CONNECTOR (10). At the same manner, attach the WHITE SUPPLY WIRE (6) to the RIBBED (or WHITE) FIXTURE LEAD WIRE (7). Loop the FIXTURE GROUND WIRE (4) around the GROUND SCREW (11) of the BRACKET(2). (Note: Be sure to provide an extra 3" length of the FIXTURE GROUND WIRE (4) for connection to the SUPPLY GROUND WIRE (5)). Tighten the GROUND SCREW (11). Connect the remaining FIXTURE GROUND WIRE (4) to the SUPPLY GROUND WIRE (5) using a WIRE CONNECTOR (10). Place wiring and connections inside the OUTLET BOX (1).
- Place the COVER PLATE (12) onto the FIXTURE MOUNTING SCREWS (13), and make a mark right against the hole of the CENTER STEM(18) on the wall with pencil, then drill a hole, insert the PLASTIC ANCHOR(17). Then secure the COVER PLATE(12) into place using the DECORATIVE NUTS(15) provided.

- Place the GLASS SHADE(16) onto the resin bobeches. Screw light bulb into the socket and make sure it does not exceed the maximum wattage specified on the fixture's wattage rating label. **MAXIMUM 60W.**

#### ASSEMBLY AND INSTALLATION (Continued)

INSTALLATION IS NOW COMPLETED

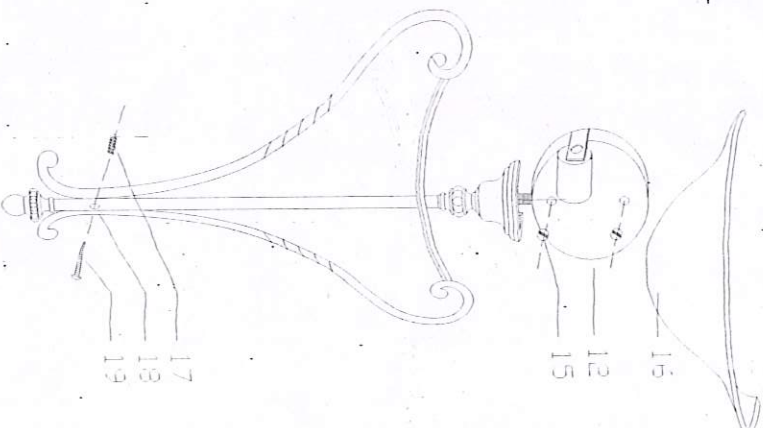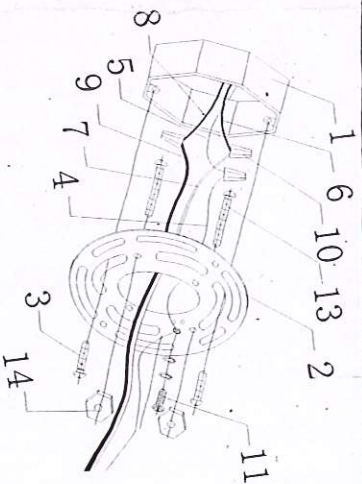

- OUTLET BOX
- BRACKET
- MOUNTING SCREW
- FIXTURE GROUND WIRE
- SUPPLY GROUND WIRE
- WHITE SUPPLY WIRE
- RIBBED (OR WHITE) FIXTURE LEAD WIRE
- BLACK SUPPLY WIRE
- SMOOTH (OR BLACK) FIXTURE LEAD WIRE
- WIRE CONNECTOR
- GROUND SCREW
- COVER PLATE
- #8-32 FIXTURE MOUNTING SCREW
- #8-32 HEX NUT
- DECORATIVE NU
- GLASS SHADE
- PLASTIC ANCHOR
- CENTER TEM
- SCREW