

95 Cantiague Rock Raod , Westbury NY 11590

ph: 516.931.9090 fax: 516.931.1254

info@crystorama.com · www.crystorama.com

MODEL#: 9263-EB

**ASSEMBLY AND DRESSING INSTRUCTIONS** 





All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.





## HOUSE & FIXTURE WIRE

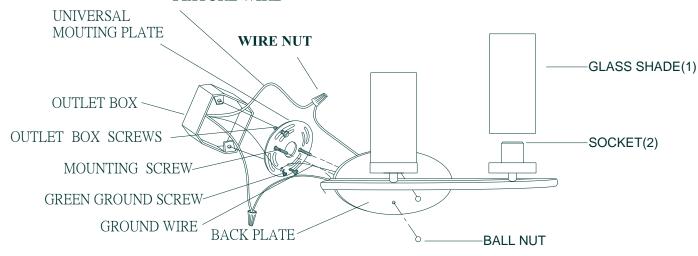



## FIXTURE ASSEMBLY, MOUNTING, AND WIRING INSTRUCTIONS:

- 1. Carefully remove the fixture out of the carton and check that all parts are included, referring to the above illustration. Make sure that the electricity is turned off.
- 2. Thread 2 Mounting screws properly into the relevant mounting holes pre-drilled on the Mounting plate;
- 3. Attach the mounting plate to outlet box using 2 Outlet box screws upwards;
- 4. Make wire connections:
- ----Attach ground wire to house ground wire using a wire nut (or attach them to the cross bar with a green ground screw).
- ----Attach ribbed wire from light to white wire from power source with a wire nut.
- ----Attach smooth wire from light to black wire from power source with a wire nut.
- 5. Tuck the wire connection neatly into the outlet box;
- 6. Place the back plate over the outlet box and let 2 mounting screws protrude through the mounting holes on the back plate well; then lock it in place by ball nuts;
- 7. Turn power on at fuse or circuit box.
- 8. Install the glass shade(1)onto socket(2);
- 9. The fixture is ready for lamping and installation!