


- 1) Lower top trim onto top of fixture body.  
2) Align hole on end of top trim with hole on bracket along top of fixture.  
3) From inside of fixture, thread small screw through hole in bracket and into top trim.  
4) Screw ball knob onto end of screw.  
5) Screw loop onto threaded pipe on top of top trim.  
6) Raise long threaded pipe up through fixture body and screw top of long threaded pipe into coupling on bottom of top trim.  
7) Raise center body of lights into inside of fixture body.  
8) Screw coupling on center of lights onto bottom of long threaded pipe.  
9) Screw top trim onto top of fixture body.  
10) Screw loop onto threaded pipe on top trim.  
11) Thread top finial through hole in center of bottom trim.  
12) Slip washer then two small trim pieces over threaded pipe protruding from bottom of bottom trim, as illustrated.  
13) Screw finial onto end of threaded pipe.  
14) Raise glass panel up through center of fixture.  
15) There is a screw head located inside top edge of fixture. Place top edge of glass in between screw head and inside edge of fixture.  
16) Holding glass panel in place, raise bottom trim assembly up to fixture.  
17) Align hole on end of bottom trim with hole on bracket along bottom of fixture.  
18) From inside of fixture, thread small screw through hole in bracket and into bottom trim.  
19) Screw ball knob onto end of screw.  
20) Repeat for remaining glass panels.  
21) Turn off power.  
22) Take threaded pipe from parts bag and screw in screw collar loop a minimum of 6 mm (1/4"). Lock into place with hexnut.  
23) Run another hexnut down threaded pipe almost touching first hexnut. Now screw threaded pipe into mounting strap. Mounting strap must be positioned with extruded thread faced into outlet box. Threaded pipe must protrude out the back of mounting strap. Connect mounting strap to outlet box.  
24) Unscrew the threaded ring from screw collar loop. Take canopy and pass over screw collar loop. Approximately one half of the screw collar loop exterior threads should be exposed. Adjust screw collar loop by turning assembly up or down in mounting strap. Remove canopy.  
25) After desired position is found, tighten top hexnut up against the bottom of the mounting strap.  
26) Slip canopy over screw collar loop and thread on threaded ring. Attach chain (with fixture connected) to bottom of screw collar loop. Unscrew threaded ring, let canopy and threaded ring slip down.  
27) Weave electrical wire and ground wire through chain links no more than 3 inches apart. Pass wire through threaded ring, canopy, screw collar loop, threaded pipe and into outlet box.  
28) Grounding instructions: (See Illus. A or B).  
A) On fixtures where mounting strap is provided with a hole and two raised dimples. Wrap ground wire from outlet box around green ground screw, and thread into hole.  
B) On fixtures where a cupped washer is provided. Attach ground wire from outlet box under cupped washer and green ground screw, and thread into mounting strap.
- If fixture is provided with ground wire. Connect fixture ground wire to outlet box ground wire with wire connector (not provided.) after following the above steps. Never connect ground wire to black or white power supply wires.

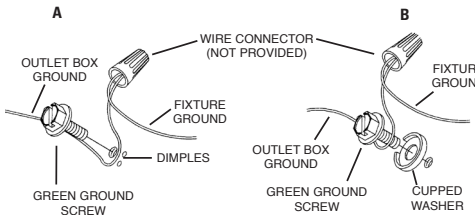


- 29) Make wire connections (connectors not provided). Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

\*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)

Neutral Wire

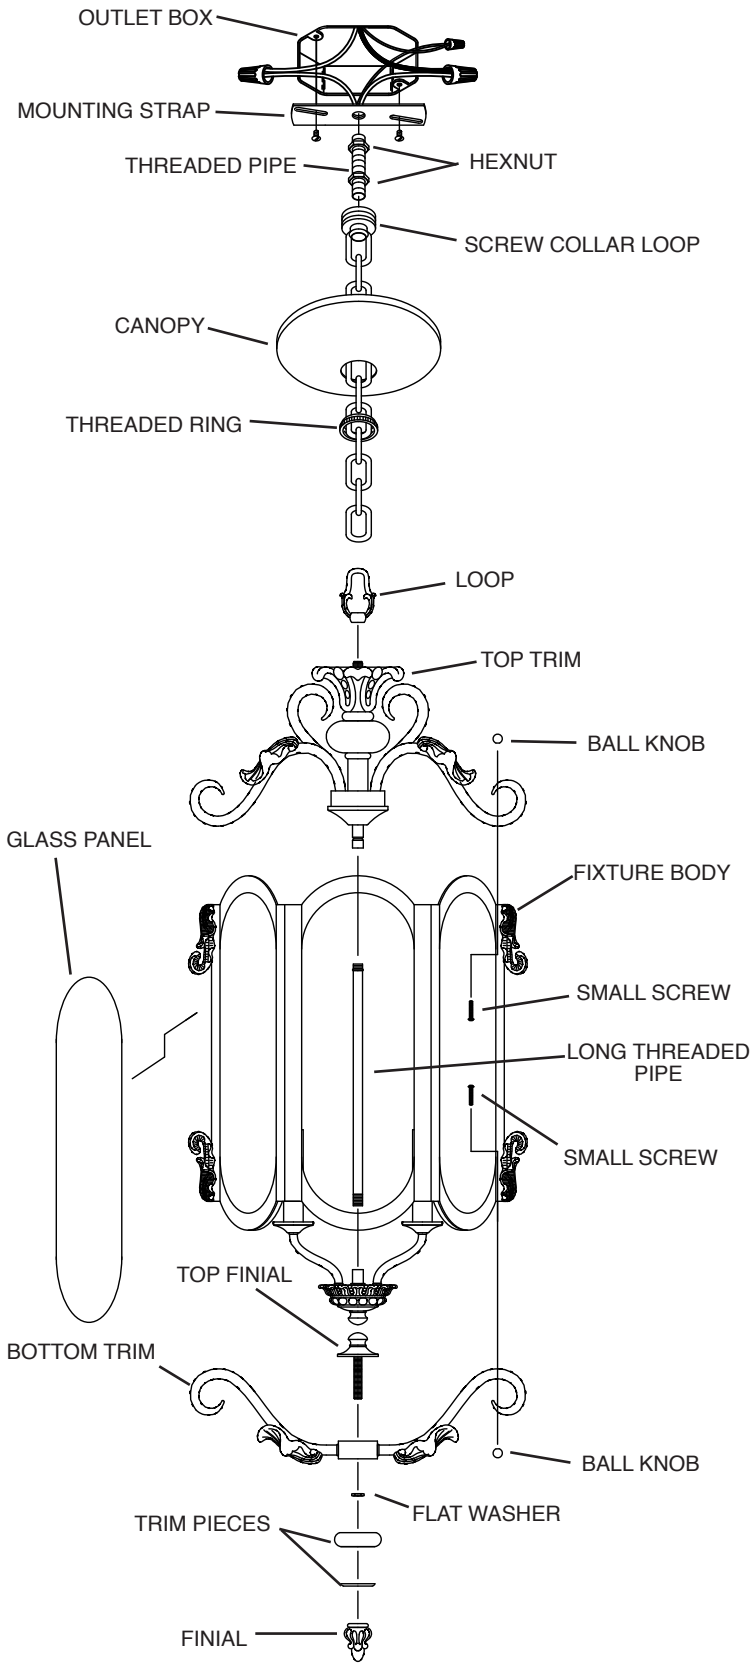

- 30) Raise canopy to ceiling.  
31) Secure canopy in place by tightening threaded ring onto screw collar loop.