

- 1) Pass wire from fixture though stem and screw stem to top of fixture.
NOTE: Thread locking compound must be applied to all stem threads as noted with symbol (◄) to prevent accidental rotation of fixture during cleaning, relamping, etc.

2) Pass fixture wire through remaining stems and screw stems together.

3) Screw last stem to threaded pipe on small loop on canopy.

4) Turn off power.

5) Assemble mounting screws into threaded holes in mounting strap.


6) Attach mounting strap to outlet box. (Screws not provided).

7) Grounding instructions: (See Illus. A or B).

A) On fixtures where mounting strap is provided with a hole and two raised dimples. Wrap ground wire from outlet box around green ground screw, and thread into hole.

B) On fixtures where a cupped washer is provided. Attach ground wire from outlet box under cupped washer and green ground screw, and thread into mounting strap.

If fixture is provided with ground wire. Connect fixture ground wire to outlet box ground wire with wire connector. (Not provided.) After following the above steps. Never connect ground wire to black or white power supply wires.

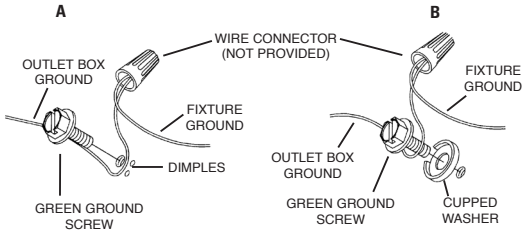

- 8) Make wire connections (connectors not provided.) Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)

Neutral Wire

- 9) Push fixture to ceiling, carefully passing mounting screws through holes in canopy.
- 10) Secure fixture to ceiling with knurl knobs.
- 11) Raise glass up through fixture passing hole in glass over socket.
- 12) Screw thumbscrews through holes in top of fixture body to secure glass in fixture.

