


Assembly Instructions For F2372/4 (E) 3/08

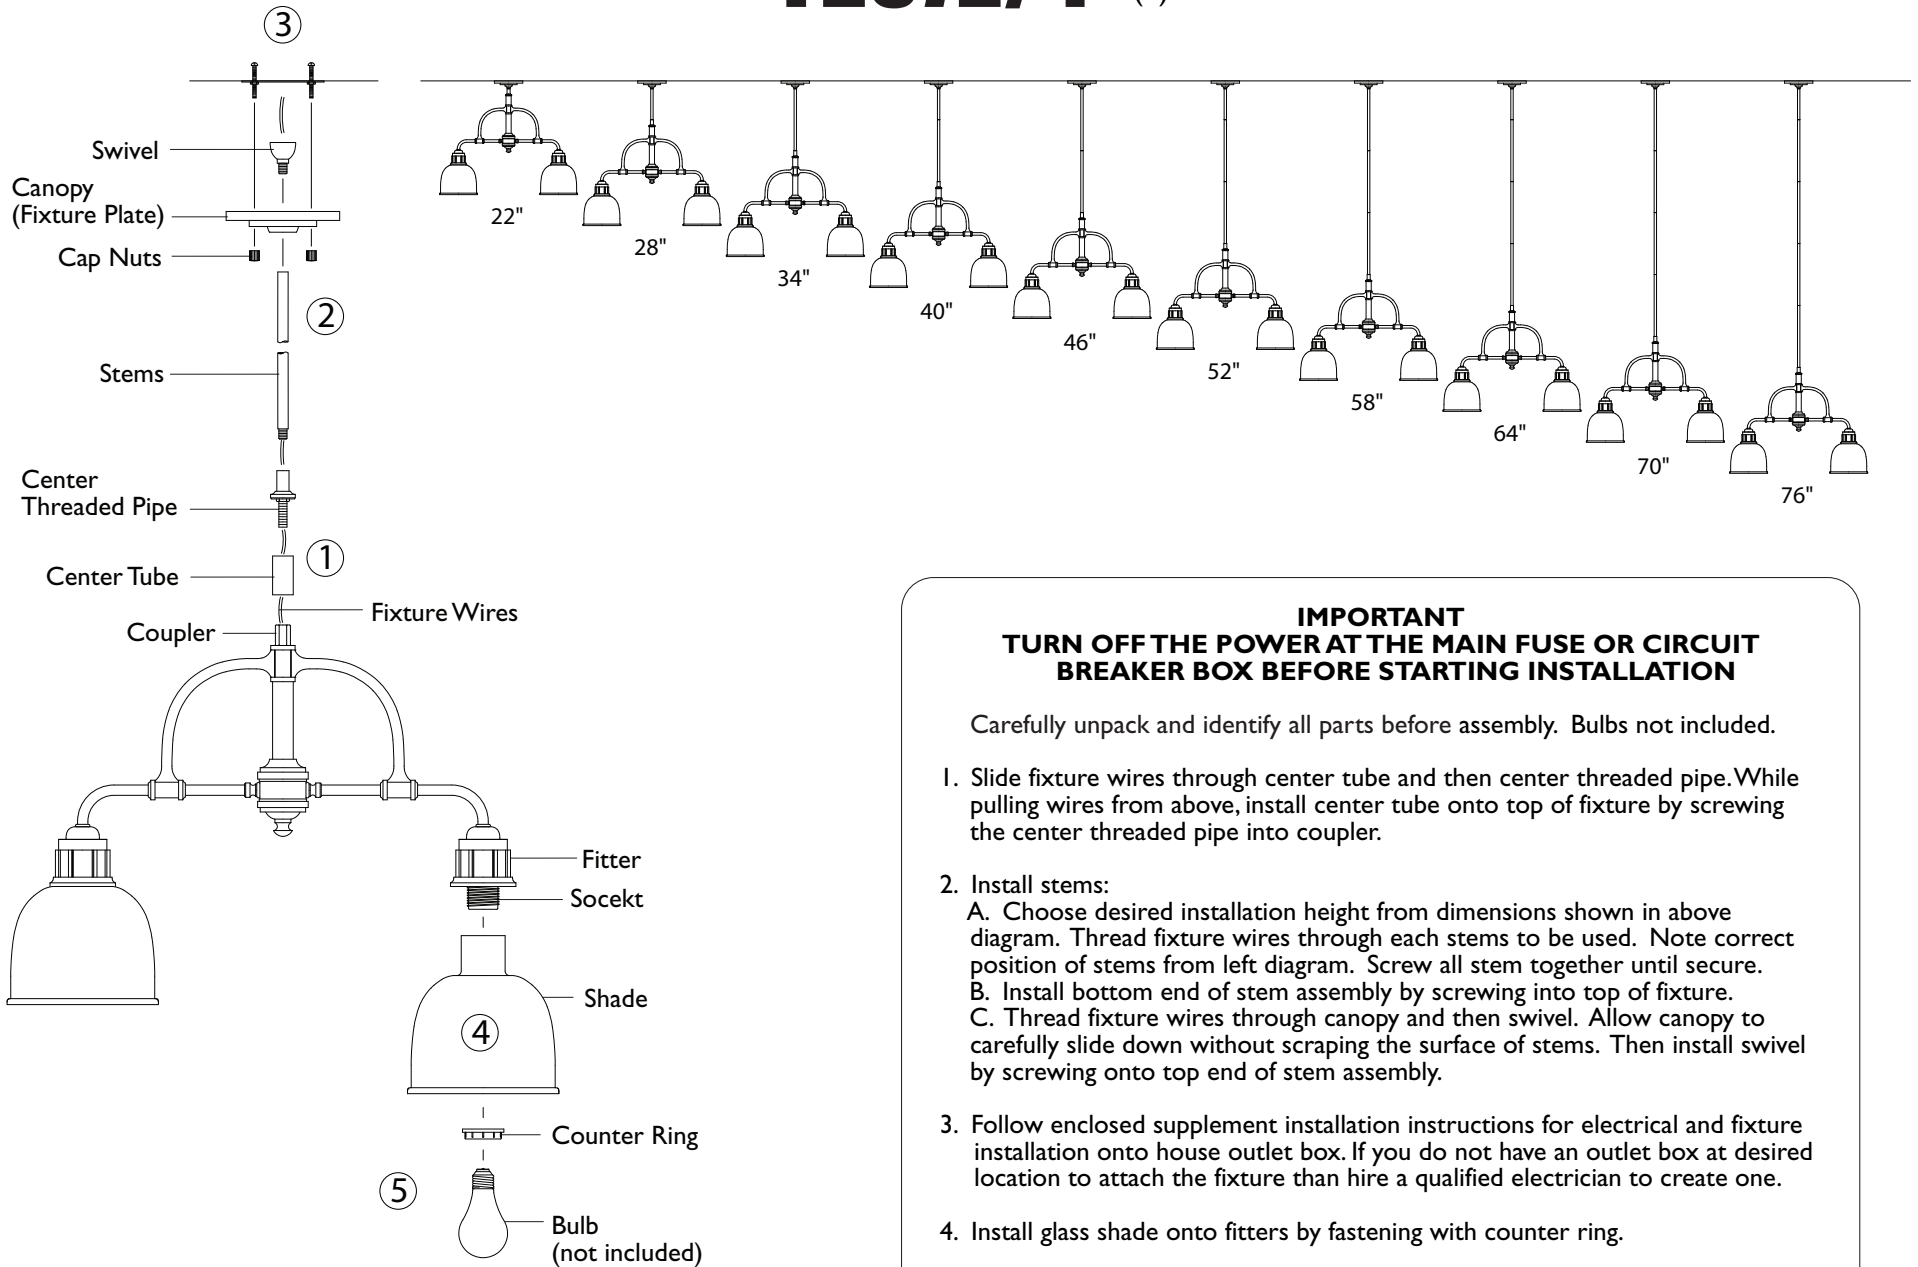

IMPORTANT
TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly. Bulbs not included.

1. Slide fixture wires through center tube and then center threaded pipe. While pulling wires from above, install center tube onto top of fixture by screwing the center threaded pipe into coupler.
2. Install stems:
 - A. Choose desired installation height from dimensions shown in above diagram. Thread fixture wires through each stems to be used. Note correct position of stems from left diagram. Screw all stem together until secure.
 - B. Install bottom end of stem assembly by screwing into top of fixture.
 - C. Thread fixture wires through canopy and then swivel. Allow canopy to carefully slide down without scraping the surface of stems. Then install swivel by screwing onto top end of stem assembly.
3. Follow enclosed supplement installation instructions for electrical and fixture installation onto house outlet box. If you do not have an outlet box at desired location to attach the fixture than hire a qualified electrician to create one.
4. Install glass shade onto fitters by fastening with counter ring.
5. Install bulbs (not included). See relamping label located near socket area for type and maximum allowed wattage.



MURRAY
FEISS
Generation Brands™