

Please go to www.quoizel.com for product cleaning tips. Go to the **Care + Maintenance** selection.

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

Light Source: LED 12W

Estimated Assembly Time: 20-30 minutes

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to ensure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact your original place of purchase.

Fixture can only be mounted in the direction indicated on page 2.


⚠ Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.


Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal.

Package Contents

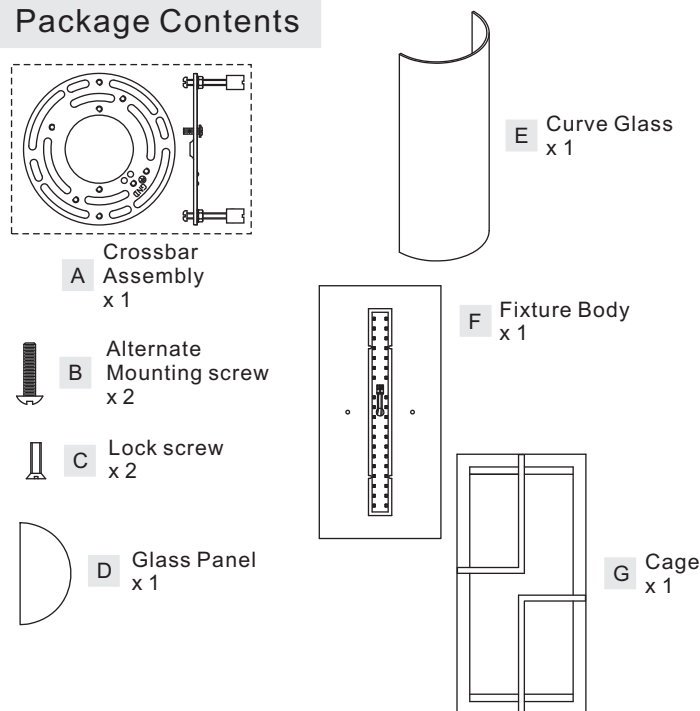


STEP 2 – Test Fit the Fixture Body to the Crossbar Assembly

A. Remove the mounting balls from the Crossbar Assembly (A). Place the Fixture Body (F) onto the Crossbar Assembly (A) and secure with mounting balls. Note: The Fixture Body (F) should be snug against the wall and held tight with the mounting balls. If it is not, adjust the length of the mounting screws or alternate short mounting screws on the Crossbar Assembly (A) by unscrewing the preassembled hex nut and lock washer and then screwing the mounting screws or alternate short mounting screws in or out of the crossbar until the correct length is achieved. Once the Fixture Body (F) is secure, remove the mounting ball and Fixture Body (F).

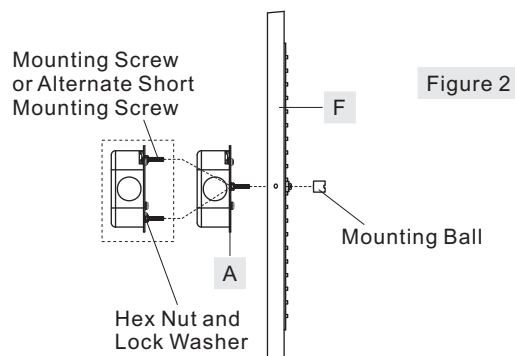


STEP 1 – Installing the Crossbar Assembly

A. Pass the supply wires through the Crossbar Assembly (A). Attach the Crossbar Assembly (A) to the Outlet Box with the head of the Green Ground Screw facing you. Secure the Crossbar Assembly (A) with Outlet Box Screws (not included). Tighten until snug. Note: Use the Alternate Shorter Mounting Screw (B) if your installation requires a shorter mounting screw.

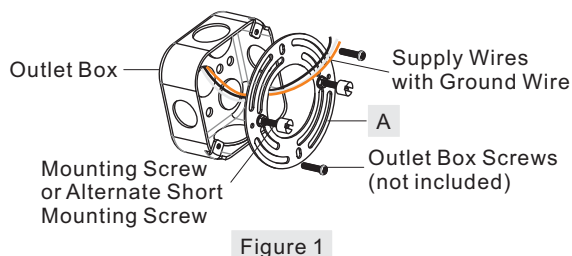

STEP 3- Wire Connections

A. Wrap bare or green ground wire around green ground screw on the crossbar, no less than 2 inches from the end of the wire. Tighten the green ground screw.
B. Use standard wire connectors (not included) to make all wire connections. Twist connectors until wires are tightly joined together. Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

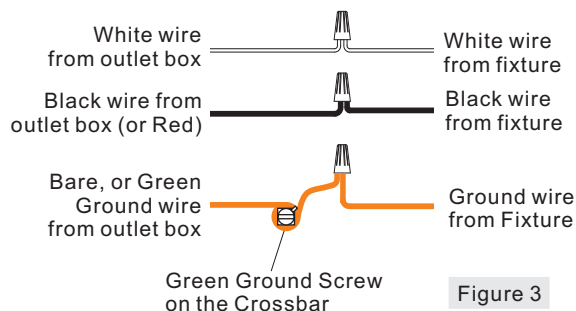

STEP 4 - Install the Fixture Body

- A. Position the Fixture Body (F) onto the Crossbar Assembly (A). Place the holes in the Fixture Body (F) over the mounting screws or alternative short mounting screws. Secure the Fixture Body (F) by using the mounting balls and hand tighten the mounting balls until snug.

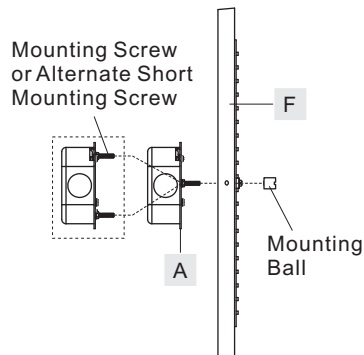


Figure 4

STEP 5 - Install Glasses

- A. Remove two shade holders from the Cage (G) by unscrewing two lock screws.
B. Place the Glass Panel (D) into the bottom of the Cage (G) first.
C. Place the Curve Glass (E) on the Glass Panel (D) in the Cage (G).
D. Secure the Glass Panel (D) and the Curve Glass (E) by placing previously removed glass holders back onto the Cage (G). Hand tighten two previously removed lock screws back into the Cage (G) until snug.

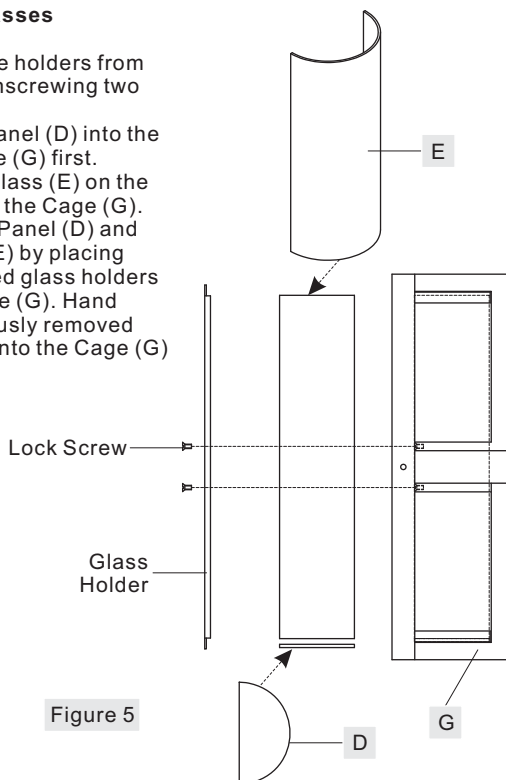


Figure 5

STEP 6 - Install the Cage

- A. Place the Cage (G) onto the Fixture Body (F) and secure with Lock Screws (C). Hand tighten until snug with screwdrivers.

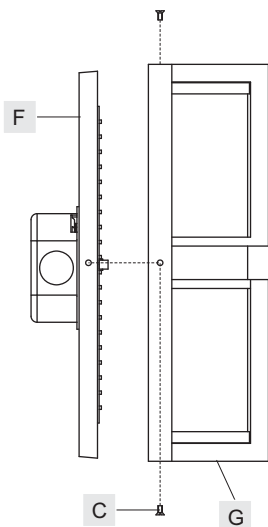


Figure 6

STEP 7 - Apply Silicone Sealer

- A. Make sure the exterior wall surface and fixture backplate are free of dirt before applying caulk. Using exterior grade caulk, caulk over top of backplate and down both sides. Do not caulk the bottom of the fixture backplate to ensure proper moisture drainage.

Your fixture is now assembled and ready to use. Enjoy!




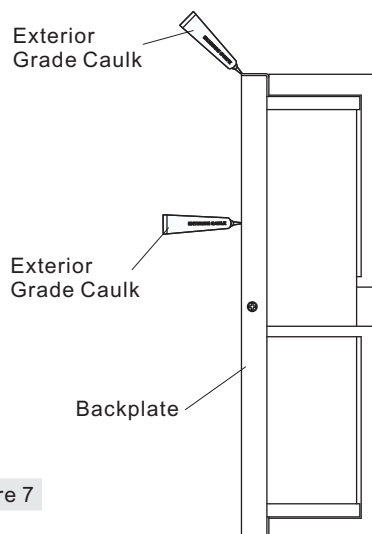



Figure 7

HGR8407MB

FINISH: MOTTLED BLACK

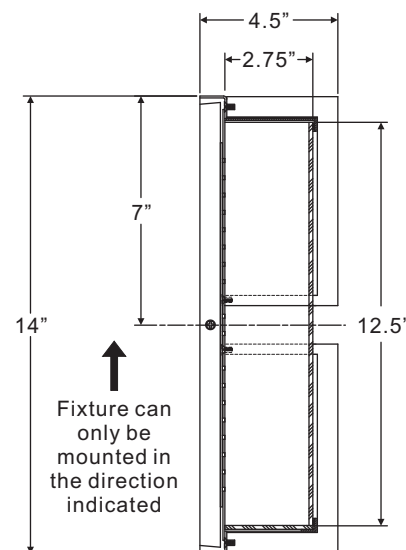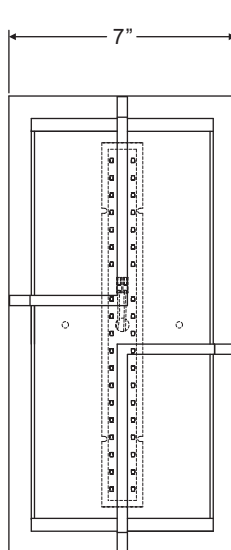

Fixture can only be mounted in the direction indicated



NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/4"