



Important: Label on back contains important information on your crystal option. Please save in case you ever need to order matching crystal.

Trim Diagram
Refrax™ Pendant RE0509-**

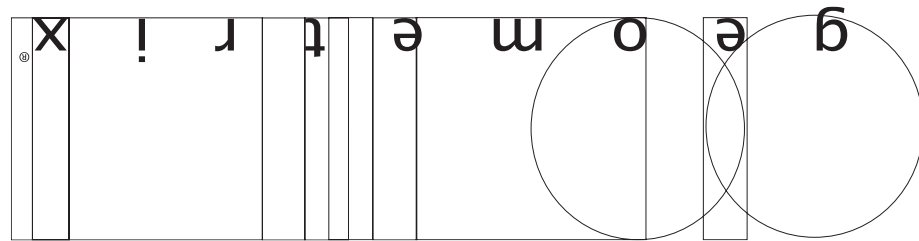


Schonbek Worldwide Lighting Inc., 61 Industrial Blvd., Plattsburgh NY 12901-1908
Tel: 800.836.1892 or 518.563.7500 www.schonbek.com

© 2006 SCHONBEK WORLDWIDE LIGHTING INC., A. SCHONBEK & CO. LTD. WORLDWIDE COPYRIGHT RESERVED
US PATENT: #5,109,325

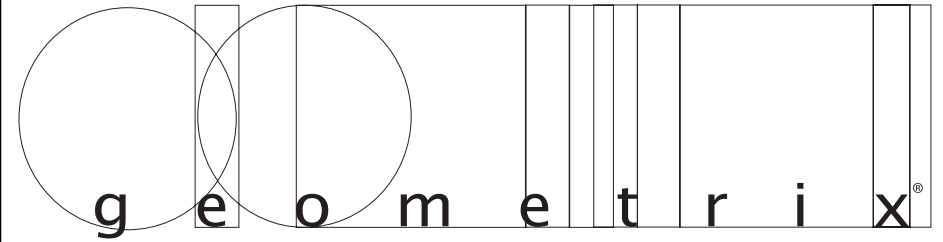

Trim Diagram
Refrax™ Pendant RE0509-**

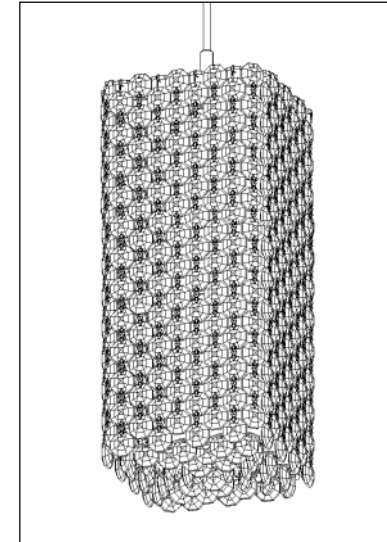

1 Light
Length: 5", Width: 5", Height: 9"

Geometrix™ is designed by Schonbek with Strass® crystal by Swarovski.






This design is the proprietary trade dress/trademark of Schonbek Worldwide Lighting Inc


Please save your trim diagram for future reference.

IMPORTANT: Label on back contains important information on your crystal option. Please save in case you ever need to order matching crystal.




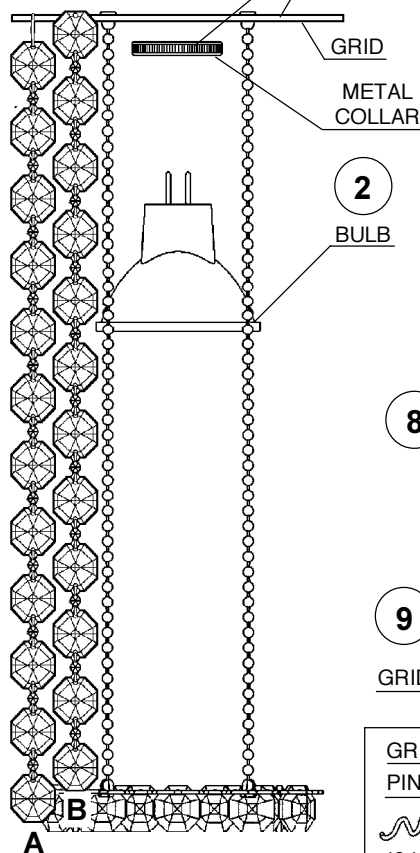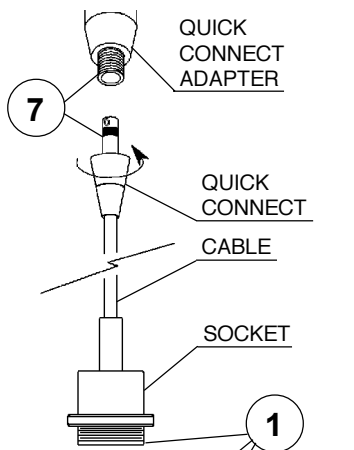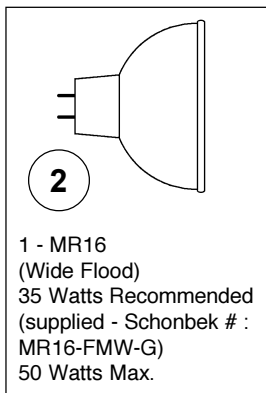

REPLACING CRYSTAL:
If a crystal breaks, you'll see a bare pin sticking out of a hole in the framework.





A Straighten pin outward.
(Be careful not to scratch frame.)



B Slide crystal octagon onto pin.



C Bend sideways to latch in place.

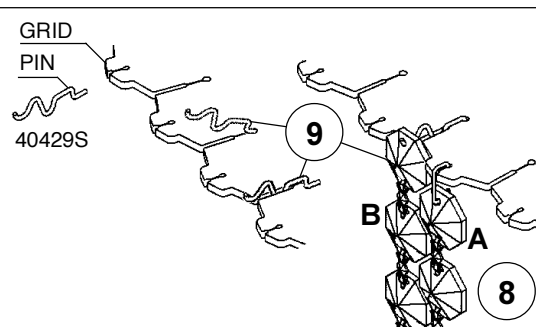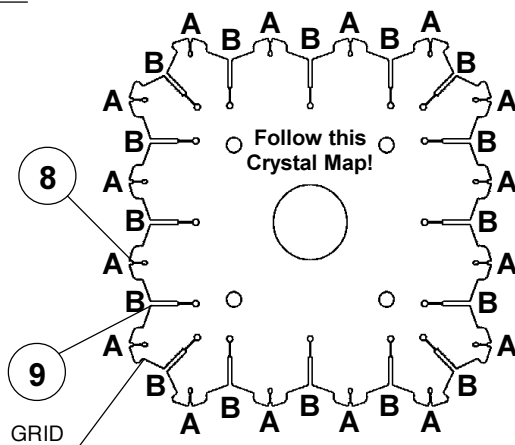


How to Install MR16 Bulb and Refrax™ Pendant:

Pendants may be mounted to monorail systems, monopoints or line voltage track by coupling to the quick connect transformer adapter. Attached to the socket is a cable that may be cut on site during installation to any length (see instructions below).


1 Position the pendant grid against the socket and secure in place by screwing the metal collar onto the socket.

2 Plug bulb carefully but completely into socket. Use only an MR16 glass covered lamp bulb.


How to Shorten the Cable:




3 Cut the cable cleanly with wire cutter to desired length, and slide brass collar over wire. Position collar so that a small section (1/16") of braided wire protrudes from the top of the collar.



4 Grasping the collar, slide braided outer wire back to expose inner wire. Trim 1/8" of insulation from the inner wire with wire stripper.



5 Feed inner wire into quick connect adapter until it reaches top set screw. Feed braided outer wire and brass collar into quick connect.



6 Tighten top set screw first, then lower set screw snugly. Smooth out any bulges in braided wire.

7 Screw quick connect into quick connect adapter until it seats. If you adjust the orientation of the pendant, be careful not to loosen the connection.

8 Hang A chains first, following the crystal map. Hook the connectors into the pinholes located towards the outside of the grid. See illustration to the left.

9 Insert pins into grid. Hang B chains by sliding the octagon with an open hole onto the pin. Chains B will nest into position between A chains. See illustration to the left.

