WAC LIGHTING

Fixture Type:

Catalog Number:

Project:

Location:

1" LEDme®

Round Adjustable Downlight (Remote Driver)

Model	*Color Temp & CRI*	*Lumens*	*CBCP*	*Finish*
❍ HR-LED232R	❍ 27 2700K - 85	245	505	❍ BN Brushed Nickel
	❍ 30 3000K - 85	250	515	❍ GM Gun Metal
	❍ 35 3500K - 85	265	546	❍ WT White
	❍ 40 4000K - 85	280	580	

Example: **HR-LED232R-27-BN**

DESCRIPTION

Perfect for ceilings, under cabinet and wall niches. LED Miniature Recessed Downlights offer a super low profile and Die-cast aluminum trim with a 25° cutoff angle for comfortable general and task lighting.

FEATURES

• Round recessed trim with interior open reflector for use with a remote driver
• Driver required
• 5 year warranty

SPECIFICATIONS

Construction:	Die-cast aluminum trim, aluminum heat sink and 20 gauge steel housing painted black.
Power:	3W
Input:	50/60Hz
Dimming:	ELV: 100-10%
Light Source:	Integrated LED
	3 Step Mac Adam Ellipse
Rated Life:	80000 Hours
Mounting:	Heavy gauge retention clips secures housing firmly to ceiling
Cut Out:	2 1/2"
Finish:	Electrostatically Powder Coated White, Electroplated Brushed Nickel, Electroplated Gun Metal
Ceiling Thickness:	1/2" - 1"
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL, cUL, Damp Location Listed, Non IC

REPLACEMENT PARTS

4MT2-S927-BK - 4MT2-N930-BK
4MT2-S930-BK - 4MT2-N935-BK
4MT2-S935-BK - 4MT2-N940-BK
4MT2-S940-BK - 4MT2-F927-BK
4MT2-N927-BK - 4MT2-F930-BK

FINISHES



Brushed Nickel | Gun Metal | White

LINE DRAWING

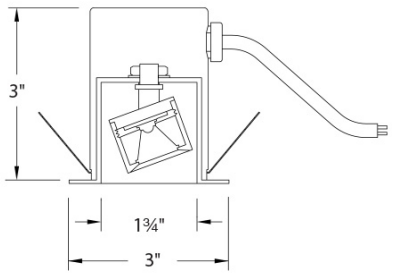

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. May 2020

Proudly assembled in America