


LUCIO – model: MO-6022

Monopoint Luminaires

WAC LIGHTING

Responsible Lighting®

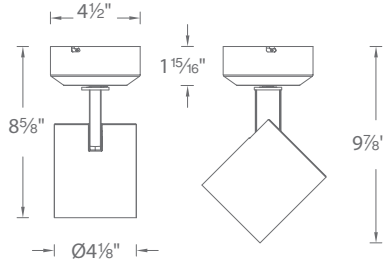

Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

Museum-quality LED luminaire with high performance optics.

FEATURES

- Accommodates up to 1 lens and 1 glare control accessory
- 365° horizontal aiming and 90° indexed vertical aiming
- CBCP intensive ultra spot, 6022U
- Asymmetrical beam distribution, 6022A
- 50,000 rated life
- 5 year warranty

SPECIFICATIONS

Construction: Die-cast aluminum body with driver enclosed in canopy.

Input: 120 - 277VAC, 50/60Hz

Power: 22W

Light Source: High output COB LED

Dimming: 100%-5% Electronic Low Voltage (ELV) or 0 - 10V

Standards: UL & cUL Damp Location Listed

Finish: Electrostatically powder coated White, Black

Model	Beam	Lumens @ 830	CBCP @ 830	Color Temp	CRI	Finish
MO-6022	U	8°	1440	35,370	827	2700K 85
	S	12°	1690	15,235	830	3000K 85
	N	20°	1675	8295	835	3500K 85
					840	4000K 85
	F	35°	1650	3730	927	2700K 90
	A	ASY	1755	N/A	930	3000K 90



MO-6022 - ____ - ____

Example: MO-6022F-827-BK

MONOPOINT EXTENSIONS Order as a complete unit

Extension	MO6022	Finish	Part Number
6"	MO6022	BK WT	827
12"			830
18"			835
24"			840
36"			927
48"			930

Example: X12-MO6022F930BK

REPLACEMENT OPTICS

'U' and 'A' are dedicated optics

12°	REF-84BL10-S
20°	REF-84BL10-N
35°	REF-84BL10-F

Accommodates one lens accessory and one glare control accessory. 'U' and 'A' beam fixtures accept one glare control accessory.

LENS ACCESSORIES

Amber	LENS-25-AMB	Yellow	LENS-25-YEL
Blue	LENS-25-BLU	Frosted	LENS-25-FR
Green	LENS-25-GRN	Spread	LENS-25-SPR
Red	LENS-25-RED	Beam Elongating	LENS-25-BEL

GLARE CONTROL ACCESSORIES

Cross Louver	LENS-25P-CRL-BK LENS-25P-CRL-WT	Snoot	LENS-25-SNOOT-BK LENS-25-SNOOT-WT
Honey Comb	LENS-25-HCL		

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

WAC LIGHTING

Responsible Lighting®

FIXTURE PERFORMANCE

Model #	Beam	Color Temp	Lumens	CBCP	CRI
MO-6022U-827	8°	2700K	1395	33,925	85
MO-6022U-830		3000K	1440	35,370	85
MO-6022U-835		3500K	1520	35,535	85
MO-6022U-840		4000K	1550	35,930	85
MO-6022U-927		2700K	1105	26,685	90
MO-6022U-930		3000K	1215	29,490	90

Model #	Beam	Color Temp	Lumens	CBCP	CRI
MO-6022F-827	35°	2700K	1585	3,595	85
MO-6022F-830		3000K	1650	3,730	85
MO-6022F-835		3500K	1660	3,730	85
MO-6022F-840		4000K	1825	4,120	85
MO-6022F-927		2700K	1365	3,080	90
MO-6022F-930		3000K	1385	3,115	90

Model #	Beam	Color Temp	Lumens	CBCP	CRI
MO-6022S-827	12°	2700K	1625	14,675	85
MO-6022S-830		3000K	1690	15,235	85
MO-6022S-835		3500K	1680	15,055	85
MO-6022S-840		4000K	1890	17,030	85
MO-6022S-927		2700K	1405	12,720	90
MO-6022S-930		3000K	1415	12,845	90

Model #	Beam	Color Temp	Lumens	CBCP	CRI
MO-6022A-827	ASY	2700K	1585	N/A	85
MO-6022A-830		3000K	1755		85
MO-6022A-835		3500K	1840		85
MO-6022A-840		4000K	1765		85
MO-6022A-927		2700K	1455		90
MO-6022A-930		3000K	1430		90

Model #	Beam	Color Temp	Lumens	CBCP	CRI
MO-6022N-827	20°	2700K	1605	7,980	85
MO-6022N-830		3000K	1675	8,295	85
MO-6022N-835		3500K	1670	8,320	85
MO-6022N-840		4000K	1865	9,115	85
MO-6022N-927		2700K	1380	6,790	90
MO-6022N-930		3000K	1400	7,050	90

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760